



VIEW FROM BELOW 1:5

X = -Y, Y = -X (pod axes); looking up (toward +Z); origin O2

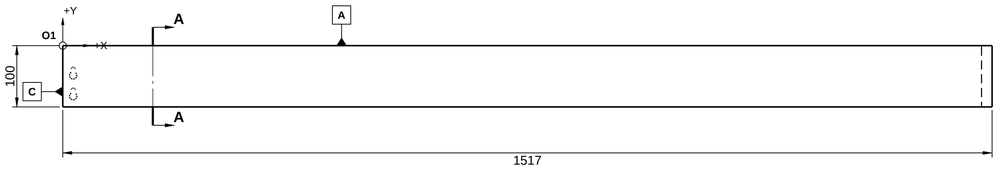


PRINCIPAL VIEW 1:5

X = -Y, Y = +Z (pod axes); looking toward +X; origin O1




VIEW FROM ABOVE 1:5

X = -Y, Y = +X (pod axes); looking down (toward -Z); origin O3



VIEW B 1:5

X = +Y, Y = +Z (pod axes); looking toward -X; origin O4

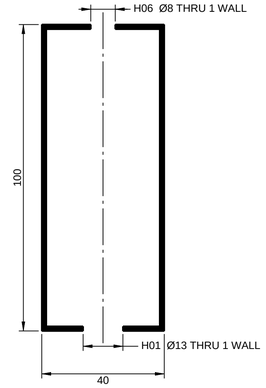

SECTION A-A 1:1

through H01/H06 (typical: H01, H02, H06, H12)
X = -X, Y = +Z (pod axes); looking toward -Y

HOLES H01-H04: BASE - BAND TUBE - SIDE - LH - TUBE, bottom face
seen in the view from below; origin O2; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H01	147.00	-20.00	Ø13	THRU 1 WALL (1.5)	FB-07 Glide nut holes Ø13, bottom wall (838006, 118002)
H02	1442.00	-20.00	Ø13	THRU 1 WALL (1.5)	FB-07 Glide nut holes Ø13, bottom wall (838006, 118002)
H03	1488.53	-13.00	Ø7	THRU 1 WALL (1.5)	FB-12 Front key fixing holes Ø7.0, left band bottom wall (111212)
H04	1488.53	-27.00	Ø7	THRU 1 WALL (1.5)	FB-12 Front key fixing holes Ø7.0, left band bottom wall (111212)

HOLES H05-H12: BASE - BAND TUBE - SIDE - LH - TUBE, top face
seen in the view from above; origin O3; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H05	97.00	26.00	Ø9.53	THRU 1 WALL (1.5)	FB-05 Spigot rivnut holes Ø9.53, top wall (831001)
H06	147.00	20.00	Ø8	THRU 1 WALL (1.5)	FB-06 Glide key holes Ø8, top wall
H07	217.00	26.00	Ø9.53	THRU 1 WALL (1.5)	FB-04 J-BASE-01 rivnut holes Ø9.53, top wall (838003, 831002)
H08	567.91	26.00	Ø9.53	THRU 1 WALL (1.5)	FB-04 J-BASE-01 rivnut holes Ø9.53, top wall (838003, 831002)
H09	918.83	26.00	Ø9.53	THRU 1 WALL (1.5)	FB-04 J-BASE-01 rivnut holes Ø9.53, top wall (838003, 831002)
H10	1269.74	26.00	Ø9.53	THRU 1 WALL (1.5)	FB-04 J-BASE-01 rivnut holes Ø9.53, top wall (838003, 831002)
H11	1389.74	26.00	Ø9.53	THRU 1 WALL (1.5)	FB-05 Spigot rivnut holes Ø9.53, top wall (831001)
H12	1442.00	20.00	Ø8	THRU 1 WALL (1.5)	FB-06 Glide key holes Ø8, top wall

HOLES H13-H14: BASE - BAND TUBE - SIDE - LH - TUBE, right face, room side
seen in the view B; origin O4; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H13	-17.00	-48.50	KEYHOLE Ø12 + SLOT 6.5, 10 TO END toward +Y	THRU 1 WALL (1.5)	FB-10 Keyholes in the side band's inner wall, at the back
H14	-17.00	-82.50	KEYHOLE Ø12 + SLOT 6.5, 10 TO END toward +Y	THRU 1 WALL (1.5)	FB-10 Keyholes in the side band's inner wall, at the back

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/2**

TITLE: **BASE - BAND TUBE - SIDE - LH**
Viền chân nhôm 100x40 - cạnh trái

PART NUMBER	REV	DRAWING NUMBER (FILE)
111101	**P01**	**111101_P01_BASE-BAND-TUBE-SIDE-LH_DWG**

MATERIAL: MATERIAL: aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 (PM ruling; alloy: assumption)

FINISH: FINISH: black anodised, matte, 20 um (class AA20, EN ISO 7599)


SCALE	SIZE	UNITS	MASS
1:5 (sections A-A 1:1)	A1	**UNITS: mm**	1.6687 kg (calculation)

MADE BY	APPROVED	TOLERANCES
tools/drawgen (D-112)	not released	TOLERANCE: see the notes; not ISO 2768

PROJECTION: ISO first angle (ISO 5456-2)

GENERAL NOTES

1. UNITS: mm. Do not scale the drawing. ISO first-angle projection (ISO 5456-2), symbol in the title block. Dimensions to ISO 129-1. Sheet 1: views, sections and hole tables; sheet 2: these general notes.
2. Views: the principal view looks toward +X (X = -Y, Y = +Z (pod axes); looking toward +X); every view's title gives its own X and Y and how they map to the pod axes (conventions section 4). On every view X runs right and Y up.
3. Datums (ISO 5459): A = top face (the wall seat, Z 110); B = outer face (X -1250, flush with the ACP); C = back end face (Y 847, square cut, under the end cap). Origin O = the corner where A, B and C meet; O1, O2... are O seen in each view. Hole positions in the tables are theoretically exact from O.
4. Drawn where it sits in the pod: its STEP is in its own system CS-111101, placed in the pod by v2/03-Manufacturing/base/110000_P01_BASE_STEP.step; X(part) = -Y(pod), Y(part) = +X(pod), Z(part) = +Z(pod) (checked hole for hole against that assembly).
5. Front end: mitre to the DL decor block's outer facet band piece, 24.14° from square, long point on the outer face; back end square (BASE tube cut list).
6. Holes go THRU 1 WALL of the member unless the table says otherwise; deburr both sides. Coaxial holes in two walls of one member are shown in section A-A.
7. TOLERANCES (PROPOSED until the shop confirms; not ISO 2768): cut length +0/-0.5, end angle ±0.25° (BASE cut list, assumption); hole positions ±0.2 from datums C and B (as BASE 111103); rivnut holes Ø9.53 +0.10/0 (maker); other hole sizes +0.2/0 (assumption). Not ISO 2768 on the anodised faces.
8. Source: v2/03-Manufacturing/base/111101_P01_BASE-BAND-TUBE-SIDE-LH_STEP.step (sha256 51a8ad6ad844; declared unit cm, read in mm and checked against tools/checks/stepfile.py, worst box difference 0 mm); parts list v2/03-Manufacturing/base/110000_P01_BASE_BOM.csv; feature rationale v2/02-Drawings/base/FEATURE-RATIONALE.md. Made by tools/drawgen (D-112) from that STEP: regenerate it, never edit the PDF.

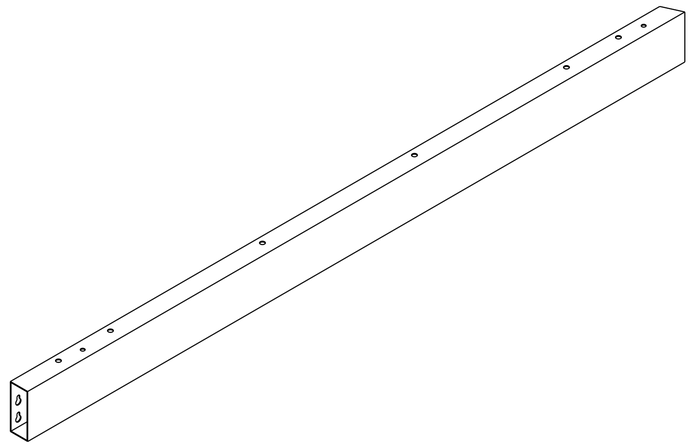

ISOMETRIC VIEW 1:5
for identification only

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **2/2**

TITLE
BASE - BAND TUBE - SIDE - LH
Viền chân nhôm 100x40 - cạnh trái

PART NUMBER: **111101**	REV: **P01**	DRAWING NUMBER (FILE): **111101_P01_BASE-BAND-TUBE-SIDE-LH_DWG**

MATERIAL: MATERIAL: aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 (PM ruling; alloy: assumption)

FINISH: FINISH: black anodised, matte, 20 um (class AA20, EN ISO 7599)

SCALE: 1:5 (sections A-A 1:1)	SIZE: A1	UNITS: **UNITS: mm**	MASS: 1.6687 kg (calculation)
MADE BY: tools/drawgen (D-112)	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	

PROJECTION: ISO first angle (ISO 5456-2)