SEGMENTS

ID	CARRIER	FROM	TO	CABLE	L mm	END A	END B
W10b	B2-CASS	P5	B2/B4 joint	6 x 18 AWG, Class 2	400	Mini-Fit Jr 6-way plug (mates W10a)	Mini-Fit Jr 6-way receptacle (tail out of the top grommet)
W10c	B4-CASS	P4 (above the joint)	P6 (shelf feed)	6 x 18 AWG, Class 2	1360	Mini-Fit Jr 6-way plug (mates W10b in P4)	Mini-Fit Jr 6-way receptacle, tail into the shelf
W11a	SHELF	P6 felt exit (X 346, Z 2250)	back uplight feed point	6 x 18 AWG, Class 2	300	Mini-Fit Jr 6-way plug (mates W10c)	strip feeds: back uplight both ways; jumpers W11b, W11c
W11b	SHELF	back feed point	left wall uplight, back end	2 x 18 AWG, Class 2	1610	strip feed connector	strip feed connector
W11c	SHELF	back feed point	right wall shelf: uplight, down-light rows, call drop at Y -209.5	4 x 18 AWG, Class 2	1220	strip feed connector	strip feed connectors; Mini-Fit Jr 2-way receptacle for the call drop (X6)

FORMBOARD 1:5 (lengths to scale along the line; a plug pair, a strip feed ring or a stroke at each end)

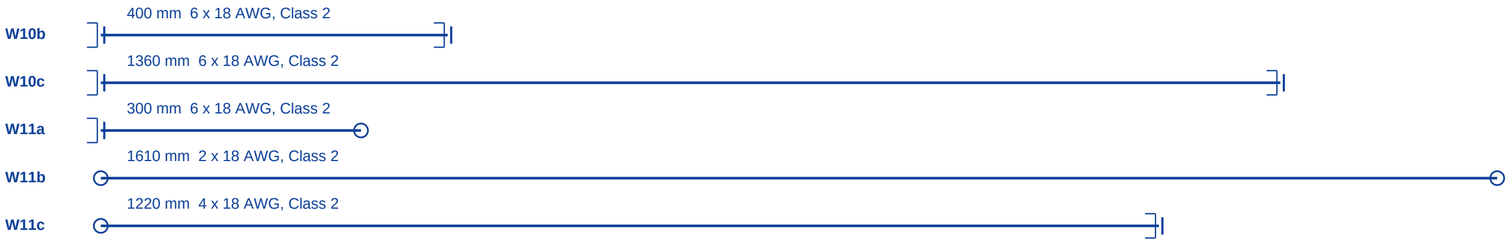

MATERIAL FOR THIS HARNESS (its share of the parts list lines, counted from the segments above)

PART NO.	NAME	QTY
718023	ELECTRICAL - CABLE - 2 X 18 AWG - CLASS 2 - BELDEN 5300UE	1.61 m
718024	ELECTRICAL - CABLE - 4 X 18 AWG - CLASS 2 - BELDEN 5302UE	1.22 m
718029	ELECTRICAL - CABLE - 6 X 18 AWG - CLASS 2 - BELDEN 5304UE	2.06 m
718030	ELECTRICAL - CONNECTOR - MINI-FIT JR RECEPTACLE 2 WAY V-0 - MOLEX 39-01-2025 (5557-02R)	1 pc
718045	ELECTRICAL - CONNECTOR - MINI-FIT JR RECEPTACLE 6 WAY V-0 - MOLEX 39-01-2065 (5557-06R)	2 pc
718046	ELECTRICAL - CONNECTOR - MINI-FIT JR PLUG 6 WAY V-0 - MOLEX 39-01-3069 (5559-06P1)	3 pc
718053	ELECTRICAL - LED STRIP FEED LEAD - 24 V - 8 MM - HÄFELE 833.75.763	8 pc

Bushings, cordgrips and edge-protected slots it passes: G-B2-B4 (Heyco 2836N bushings, 718041).
Terminals: Mini-Fit Jr female 39-00-0039 (718036) and male 39-00-0041 (718037) on 18 AWG, one per way.

NOTES
Segments, ends and lengths from the harness list (710000_P01_ELECTRICAL-HARNESS-LIST_SPEC.csv), same revision.
UNITS: mm. GENERAL TOLERANCE: harness segment lengths +20/-0 mm; positions taken from the route model +/-5 mm;
sheet-metal parts ISO 2768-m (their DXF or drawing rules). Status of every number: parts list and harness list.
Every harness segment is tested in the factory before it ships (D-87): continuity, polarity, no shorts, latch pull,
label with its ID. Cables clip to the cassette tray only (D-26). Supply side = receptacle (female contacts).
Bought parts are named from their datasheets (those still on HOLD give their reason in the parts list 710000); no order, no supplier contact. From the electrical model and parts data.

PROJECT	FocusPod v2 - Spaceship
TITLE	**ELECTRICAL - HARNESS - LIGHT FEED - B2/B4: ASSEMBLY**
DWG / PART NO.	710011 (assembly)
REV / STATUS	P01 / DRAFT - not for production
UNITS / SCALE	mm / formboard 1:5; tables not to scale
SHEET	1 of 1 (A2)
DATE / BY	2026-11-01 / Autonomous
SOURCE	electrical_model.py, electrical_parts.py