



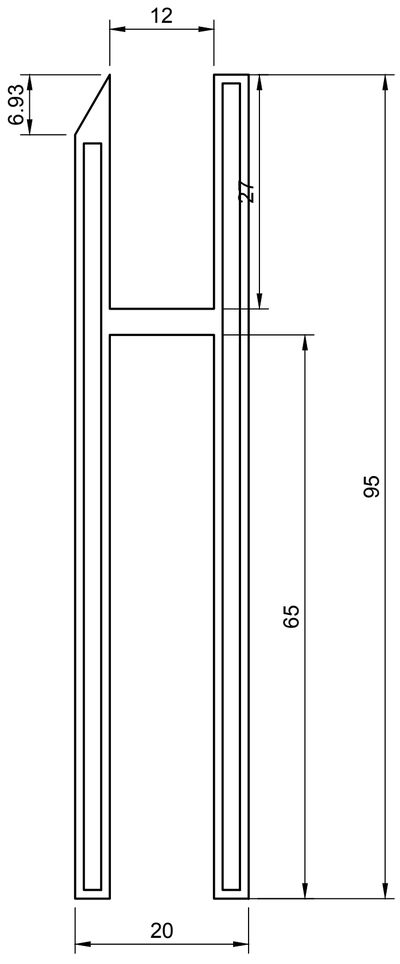

NOTES

1. Aluminium EN AW-6063-T6 hollow extrusion (D-85), custom die; black anodised matte, 20 um (AA20, D-67), as the base band. Section 1:1 in 361002_P01_FRONT-DOOR-KICK-STRIP_DXF.dxf.
2. Cut length 1175 (-1/0), square ends. Chamber ends sealed with black sealant flush with the end faces.
3. Top pocket 12 wide x 27 deep takes the Bohle BO5201735 silicone U-seal and the leaf's bottom 25 mm; bottom cavity 12 wide x 65 tall takes the athmer Schall-Ex GSA drop seal, bonded to the pod-side wall (bond to anodised aluminium HOLD).
4. Floor gap: the strip's bottom sits on the base band's bottom line, 10 over the room floor (D-132: no floor, no threshold); the drop seal closes it, its travel 20 covering an uneven floor. How the strip is held on the glass is HOLD J-FRONT-02 (structural silicone or a clamp).
5. Push side (pod side, the door opens outward): the wall's top edge tapered 60 deg from the horizontal, 6.9 high (US door rule, PM ruling 2026-11-01); the outside face stays square.
6. Tolerances (PROPOSED): pocket and cavity widths 12 +0.3/0; height 95 +/-0.2; skins 1.0 +/-0.1; taper 60 +0/-5 deg.
7. UNITS: mm. Angles in degrees. Mass in kg.
8. Projection: first angle (ISO 5456-2). The front view looks toward +Y, at the door from outside the pod; the view from above is below it; the view from the left is to its right. 2D axes: front X(2D)=X, Y(2D)=Z; above X(2D)=X, Y(2D)=Y; left X(2D)=-Y, Y(2D)=Z (guideline 3.3). Coordinates are the pod's (conventions 4).
9. No ISO 2768 class on glass, seals or sandwich parts (conventions 3). Tolerances given here are PROPOSED from function until the maker confirms what it holds.
10. Status DRAFT P01: for the prototype and the factory's door sample only, not released (conventions 8).
11. Why each feature is where it is: v2/02-Drawings/front/FEATURE-RATIONALE.md. Parts list: v2/03-Manufacturing/front/*_BOM.csv.

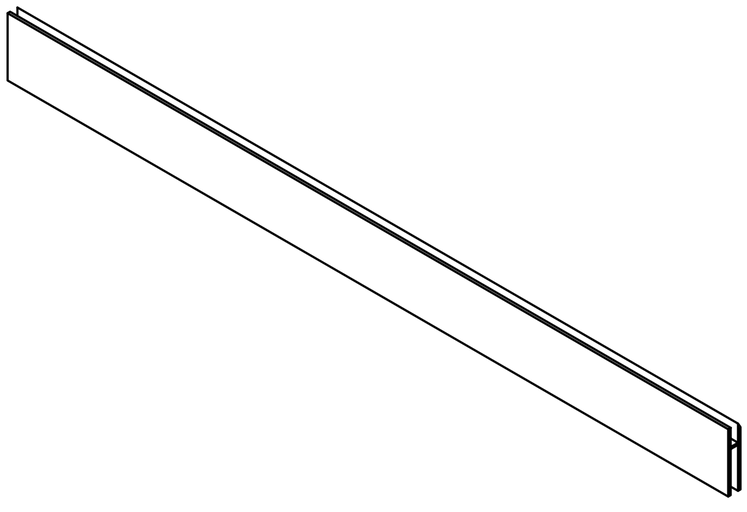

TITLE DATA (the title block fields can't be set by script)	
PART NO.	361002
NAME	FRONT - DOOR KICK STRIP
TÊN	Thanh chân cửa nhôm
REV / STATUS	P01 / DRAFT
MATERIAL	aluminium EN AW-6063-T6
FINISH	black anodised matte 20 um (AA20)
SCALE	1:5, section 2:1
UNITS	mm
PROJECTION	first angle
SHEET	A2
MASS	1.35 kg (calculation, CAD)

Dept.	Technical reference	Created by	Approved by
		Autonomous 1/11/26	
		Document type	Document status: DRAFT
		Title: FRONT - DOOR KICK STRIP	DWG No.: 361002
			Rev.: P01 / Date of issue / Sheet: 1/1