

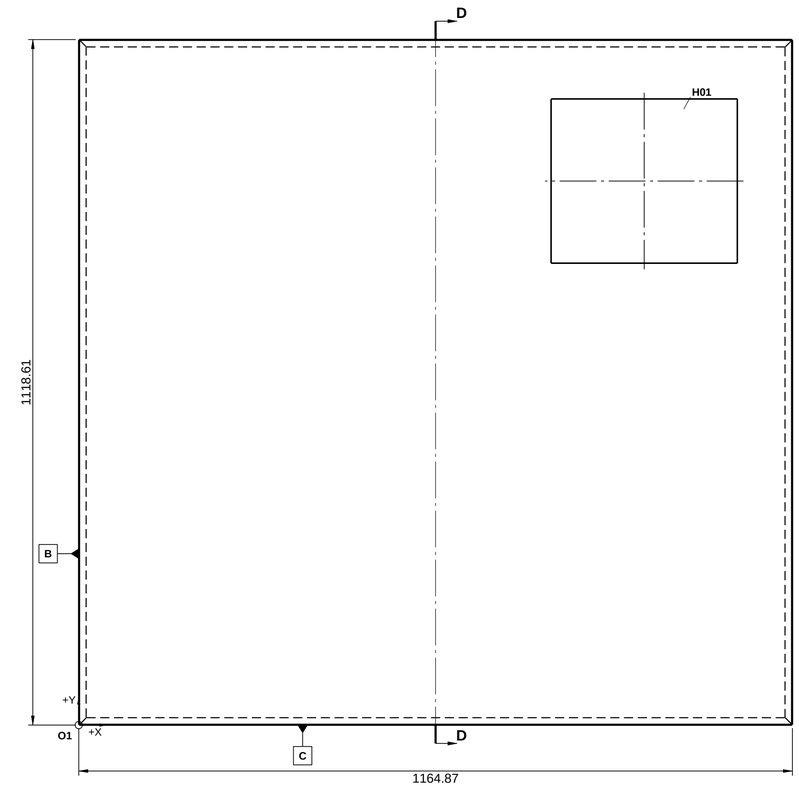



PRINCIPAL VIEW 1:5
X = -X, Y = +Z (pod axes); looking toward -Y; origin O1

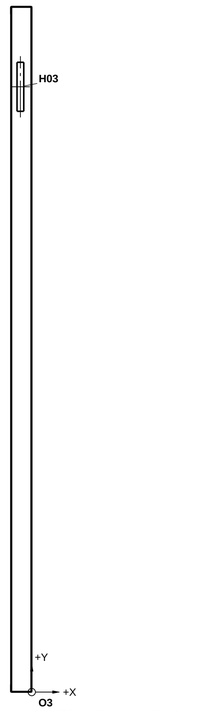


VIEW FROM THE LEFT 1:5
X = +Y, Y = +Z (pod axes)
looking toward -X
origin O3



VIEW FROM ABOVE 1:5
X = -X, Y = -Y (pod axes); looking down (toward -Z); origin O2



SECTION D-D 2:1
across the bends, at the middle
one end, the other end the same
typical at every side
X = +Y, Y = +Z (pod axes)
looking toward -X

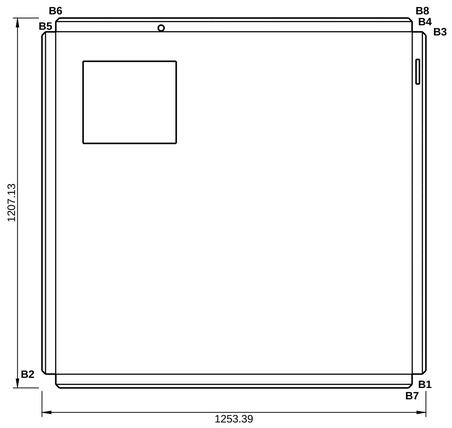

FLAT PATTERN 1:10
from 511202_P01_LINING-TRAY-BACK-LOWER-B2_DXF.dxf, as its x and y draw it: the side it shows faces you
bend lines thin chain, B1 to B8
UP: the flange folds toward you

CUT-OUT H01: TRAY - STEEL 0.5 WITH RETURNS AND LIPS, back face
seen in the principal view; origin O1; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H01	923.00	887.74	CUT-OUT 304 x 268 along X	THRU (0.5)	F44 Power unit cut-out 304 x 268

HOLE H02: TRAY - STEEL 0.5 WITH RETURNS AND LIPS, top face
seen in the view from above; origin O2; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H02	820.00	12.50	Ø19.1	THRU 1 WALL (0.5)	F39 Bushing holes for the light feed across the B2/B4 lining joint

CUT-OUT H03: TRAY - STEEL 0.5 WITH RETURNS AND LIPS, right face
seen in the view from the left; origin O3; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H03	-18.50	987.74	CUT-OUT 80 x 11 along Y	THRU (0.5)	F45 Corner slot S-CNR 11 x 80 in the end return


BENDS B1-B8: 511202_P01_LINING-TRAY-BACK-LOWER-B2_DXF.dxf
UP: the flange folds toward the viewer of the flat pattern as drawn; K-factor 0.44, inside radius from the model

TAG	LINE IN THE FLAT (mm)	DIRECTION	ANGLE	INSIDE RADIUS	BEND ALLOWANCE (mm)
B1	y 11.57 from the lower edge	UP	90°	R0.5	1.131
B2	y 44.7 from the lower edge	UP	90°	R0.5	1.131
B3	y 1162.44 from the lower edge	UP	90°	R0.5	1.131
B4	y 1195.57 from the lower edge	UP	90°	R0.5	1.131
B5	x 11.57 from the left edge	UP	90°	R0.5	1.131
B6	x 44.7 from the left edge	UP	90°	R0.5	1.131
B7	x 1208.7 from the left edge	UP	90°	R0.5	1.131
B8	x 1241.83 from the left edge	UP	90°	R0.5	1.131

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/2**
TITLE: **LINING - TRAY - BACK LOWER - B2** Khay thép lót vách hậu dưới phải			
PART NUMBER: **511202**	REV: **P01**	DRAWING NUMBER (FILE): **511202_P01_LINING-TRAY-BACK-LOWER-B2_DWG**	
MATERIAL: MATERIAL: galvanised steel sheet 0.5, EN 10346 DX51D+Z			
FINISH: FINISH: hot-dip zinc (coating mass to confirm)			
SCALE: 1:5 (sections D-D 2:1) (flat pattern 1:10)	SIZE: A1	UNITS: **UNITS: mm**	MASS: 5.5818 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			

GENERAL NOTES

1. UNITS: mm. Do not scale the drawing. ISO first-angle projection (ISO 5456-2), symbol in the title block. Dimensions to ISO 129-1. Sheet 1: views, sections and hole tables; sheet 2: these general notes.
2. Views: the principal view looks toward -Y (X = -X, Y = +Z (pod axes); looking toward -Y); every view's title gives its own X and Y and how they map to the pod axes (conventions section 4). On every view X runs right and Y up.
3. Origin O = the part's corner shown; O1, O2... are O seen in each view. Hole positions in the tables are from O.
4. TRAY: galvanized steel sheet 0.5, DX51D+Z (EN 10346). Blank laser cut or punched from its DXF, then folded on a press brake: the four returns 90° toward the room, then the four 12 lips 90° inward; inside radius 1 x t (the model's; the factory's tooling confirms it); corner reliefs as the DXF.
5. The floating inner leaf (D-17): no screw ever joins it to the frame. It hangs on the wall clips, which only hold, and its bottom return sits on the panel's cassette ledge and its pad (the Lead's ruling of 2026-11-01).
6. The felt, a part of its own, is held by the lips over the 24 air gap (D-17).
7. Holes go THRU 1 WALL of the member unless the table says otherwise; deburr both sides.
8. Bent from the flat pattern v2/03-Manufacturing/wall/511202_P01_LINING-TRAY-BACK-LOWER-B2_DXF.dxf (sha256 e09fce38c762): its CUT outline, its BEND lines the bend centre lines, its MARK lines the bend zones' edges. Inside radius R0.5 from the model; K-factor 0.44 (calculation: the DXF's bend lines and flat size against the model's flanges at that radius, every bend within 0.05). Flange lengths are outside sizes, to each fold's outside sharp; the bend table gives each bend's direction, angle and allowance.
9. TOLERANCES (PROPOSED until the shop confirms; not ISO 2768): blank sizes ±0.5; fold positions ±0.5; folds 90° ±1°; the back flat within 2 over its length (assumption, guideline 6.3); F39's bushing hole Ø19.1 ±0.2, F44's power unit cut-out 304 x 268 and F45's corner slot 11 x 80 ±0.5 (the feature rationale's tolerances, assumptions)
10. Source: v2/03-Manufacturing/wall/510202_P01_LINING-CASSETTE-BACK-LOWER-B2_STEP.step (sha256 2b2ec7410296; declared unit cm, read in mm and checked against tools/checks/stepfile.py, worst box difference 0 mm); parts list v2/03-Manufacturing/wall/210202_P01_WALL-PANEL-ASSY-BACK-LOWER-B2_BOM.csv; feature rationale v2/02-Drawings/wall/FEATURE-RATIONALE-210202.md. From that STEP: regenerate it, never edit the PDF.

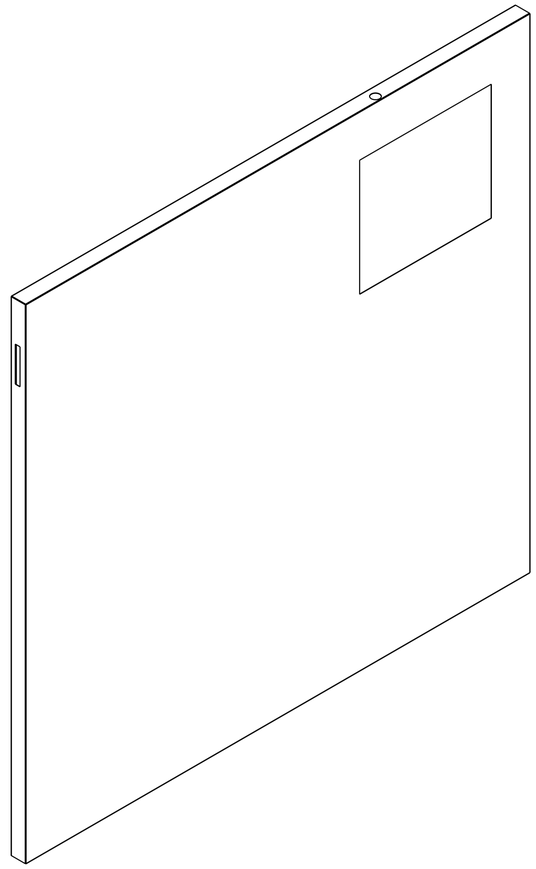

ISOMETRIC VIEW 1:5
for identification only

PROJECT **Spaceship (FocusPod v2)**	STATUS **DRAFT**	DATE 2026-11-01	SHEET **2/2**
TITLE **LINING - TRAY - BACK LOWER - B2** Khay thép lót vách hậu dưới phải			
PART NUMBER **511202**	REV **P01**	DRAWING NUMBER (FILE) **511202_P01_LINING-TRAY-BACK-LOWER-B2_DWG**	
MATERIAL MATERIAL: galvanised steel sheet 0.5, EN 10346 DX51D+Z			
FINISH FINISH: hot-dip zinc (coating mass to confirm)			
SCALE 1:5 (sections D-D 2:1) (flat pattern 1:10)	SIZE A1	UNITS **UNITS: mm**	MASS 5.5818 kg (calculation)
CREATED BY Autonomous	APPROVED not released	TOLERANCES TOLERANCE: see the notes; not ISO 2768	
PROJECTION ISO first angle (ISO 5456-2)			