

## REQUEST FOR INFORMATION (RFI)

PROJECT :	BKK2	R.F.I. NO. :	523213-01-RFI-AR-0034
TO :	CTA	ATTENTION :	CTA
SUBMITTED DATE:	21-Jan-26	NEED REPLY BY DATE :	28-Jan-26

SUBMISSION OF : ☒ Q&A ☐ Drawing ☐ Document ☐ Others (as specified below)

SUBJECT : Request for Information - Clarify the C2 T-Bar Ceiling and Specify the Colour.

Total Page (s) : 8 (Including this page)

FUNCTION :	<input type="checkbox"/> Structural (ST)	<input type="checkbox"/> Electrical & Communication (EL)	<input type="checkbox"/> Mechanical (ME)	<input type="checkbox"/> Vertical Transport (VT)
	<input checked="" type="checkbox"/> Architectural (AR)	<input type="checkbox"/> Fire Protection (FI)	<input type="checkbox"/> Hydraulic & Sanitary (HY)	<input type="checkbox"/> Other (O)

## (1) CONTRACTOR REQUEST FOR INFORMATION :

Please clarify the type of ceiling T-bar C2, we need to use for the ceiling installation and specify the color for BKK2. Please see more details in the attached file.


Requested by : 

Engineering Manager


Reviewed by : 


Project Manager

## (2) ATTN : Commtech Asia (Thailand)

☐ For Approval ☐ See Note ☒ Please Clarify

Note : Aurecon to clarify the C2 T-Bar and the colour

From : GAA Group  
By :   
Name / Position : Mr. Itsarate Trachuengtong/  
Project Manager  
Date : 21-Jan-26

Reviewed By :   
Commtech Asia (Thailand)  
Name / Position : Finlay Coady  
Sr. Project Manager  
Date : 30th January 2026

## (3) ATTN : AURECON

☐ For Approval ☐ See Note ☐ Please Clarify

Note : Lift lobby and checked hall will be change to C1 per interior design drawing (9mm thk. moisture resistant gypsum board set plaster w/ moisture resistant paint finish code: P02) AR-4501, 5404, 4505.

From : Commtech Asia (Thailand)  
By :  
Name / Position ( )  
Date :


Reviewed By : Tarkoon Suwansukhum  
AURECON  
Name / Position ( Tarkoon S / Architect )  
Date : 3 February 2026

## (4) ATTN : STT GDC

☒ Clarification only ☐ Not Approved  
☐ Approved for proceeding work  
☐ Approved with comments, proceeding work in compliance with comments  
☐ Approved with comments, not for proceeding work and need to re-submit

Note : Please follow SLA's response

From : AURECON  
By :  
Name / Position ( )  
Date :

Reviewed By : STT GDC   
Name / Position : Sirawit Thepsuwan VP PMO  
Date : 6 Feb 2026

รายการวัสดุ FINISHING SCHEDULE										
FLOOR FINISH ( รายการวัสดุพื้น )					WALL FINISH ( รายการวัสดุผิวผนัง )					
FLOOR NO.	LOCATION	DESCRIPTION	SPECIFICATION	SUPPLIER	WALL NO.	LOCATION	DESCRIPTION	SPECIFICATION	SUPPLIER	
F1	HALL, LOBBY, MANTRAP	FLOOR TILE	600X1200 HOMOGENOUS FLOOR TILE NON SLIP R10	COTTO OR VECERA	1	HALL, GF LIFT LOBBY	WALL PLASTER	WALL PLASTER WITH SKIM COATED AND EMULSION PAINT	LOCAL	
F2	CORRIDOR	EPOXY FLOOR	CONCRETE STEEL TROWEL FINISH WITH 2 MM THK. SIKAFLOOR 81 EPOCEM AND EPOXY 2 MM. SIKAFLOOR 263SL HC SYSTEM OR WEBERFLOOR CEM BM 2 MM.+WEBERFLOOR 520 SL 2MM	SIKA / WEBER	2	OFFICE, M&E STORE, STAIR	WALL PLASTER	WALL PLASTER WITH INTERNAL EMULSION PAINT	TOA	
F3	DATA HALL, BATTERY RM	RAISED FLOOR	DURABLE ANTI-STATIC VINYL LAMINATE TO RAISED FLOOR TILE TATE IHCSF 2000 FLOOR TILE TYPE SEE DRAWING AR-	TATE SITEM	3	DATA HALL, CRAH, OFFICE, CORRIDOR	PAINT	INTERNAL EMULSION PAINT FINISH OVER GYPSUM BOARD PARTITION	TOA	
F3A	DATA HALL, BATTERY RM	RAISED FLOOR	TATE DIRECTAIRE AL 60 CM. PANEL WITH SINGLE ZONE OPPOSED BLADE DAMPER	TATE SITEM	4	TOILET, JARNITOR, CHARGING ROOM	WALL PLASTER	WALL PLASTER WITH WATERPROOF SYSTEM SIKA TOPSEAL 107 AND CERAMIC WALL TILE 400X800 MM. WALKS/1.0 WHITESOFT	SIKA	
F3B	DATA HALL, BATTERY RM	RAISED FLOOR	TATE IHCSF 2000 HPL LAMINATED FINISH WITH KOLDLOK SURFACE MOUNT	TATE SITEM	5	MEP ROOM, AHU ROOM	WALL PLASTER	WALL PLASTER WITH INTERNAL EMULSION-SEMI-GLOSS PAINT	TOA	
F3C	DATA HALL, BATTERY RM	BELOW RAISED FLOOR	WATERPROOF SYSTEM WEBERDRY S3000S 1.5 MM. THK ON STRUCTURE SLAB/50 MM. SCREED /WEWBERFLOOR CEM MB+WEBERFLOOR 520 SL	TATE SITEM	6	MEETING, PRESENTATION ROOM	ID WALL	DECORATIVE ACOUSTIC WALL REFER ID DRAWING		
F4	STAIR	EPOXY FLOOR	CONCRETE STEEL TROWEL FINISH WITH PAINT FINISH SIKAFLOOR -264HC SYSTEM	SIKA	7	WATER TANK	RC WALL	WATER PROOF SYSTEM SIKA TOPSEAL 109 OVER RC WALL		
F5	MEP ROOM	EPOXY FLOOR	CONCRETE STEEL TROWEL FINISH WITH 2 MM. THK SIKAFLOOR 81 EPOCEM AND EPOXY FINISH 2 MM. THK SIKAFLOOR -263SL HC SYSTEM OR WEBERFLOOR CEM BM 2 MM.+WEBERFLOOR 520 SL 2MM	SIKA / WEBER	8	CORRIDOR	PAINT	PRECAST CONCRETE WALL WITH INTERNAL EMULSION PAINT	TOA	
F6	DATA HALL 2FL - 4FL	EPOXY FLOOR	WATERPROOF SYSTEM SIKABITUSEAL 1500 SA ON STRUCTURE SLAB/ 50 MM. SCREED STEEL TROWEL FINISH FLATNESS FM2 / EPOXY PRIMER/ SIKAFLOOR 161SL HC 2MM. THK + COPPER STRIP 3X3 M SPACING/ SIKAFLOOR-220W CONDUCTIVE + SIKAFLOOR 2350 ESD SELF SMOOTHING ELECTROSTATIC DISSIPATIVE EPOXY RASIN GLOSS FINISH 2 MM. THK	SIKA	9	MEP ROOM	PAINT	INTERNAL EMULSION-SEMI-GLOSS PAINT OVER GYPSUM BOARD PARTITION	TOA	
					21	EXTERNAL BUILDING	WALL PLASTER	WALL PLASTER WITH EXTERNAL PAINT FINISH	TOA	
					22	EXTERNAL BUILDING	PRECAST CONCRETE WALL	PRECAST CONCRETE WALL COAT WITH EXTERNAL PAINT FINISH	TOA	
F7	TOILET, PANTRY, JARNITOR, CHANGING ROOM	CERAMIC TILE	400X800 HOMOGENIOUS TILE WALK/1.0 BLACKSOFT WITH WATERPROOF SYSTEM SIKA TOPSEAL 107 SYSTEM	SIKA / COTTO	23	DROP-OFF	WALL PLASTER	WALL PLASTER WITH 2 MM.THK ALUCOLUX ALUMINIUM PANEL	BFM	
F8	TECHNICAL ASSISTANT RM.	CARPET TILE	500X500 CARPET TILE REFER TO ID	INTERFACE	25	TRUCK LOADING AREA	WALL PLASTER	WALL PLASTER WITH EXTERNAL ENAMEL PAINT FINISH	TOA	
F9	LOADING AREA, RAMP	CONCRETE SLAB	CONCRETE STEEL TROWEL FINISH WITH FLOOR HARDENER (NON METALLIC) SIKA FLOOR -3QUARTZTOP GREY COLOUR	SIKA	26	EXTERNAL BUILDING 200 MM ABOVE ROAD OR LANDSCAPE LEVEL	WALL PLASTER	WALL PLASTER WITH COLOUR CEMENT FINISH	CERAC CURE	
F10	CAR PARK	CONCRETE SLAB	CONCRETE FLOOR WITH TRAFFIC / CAR PARK PAINT TOA ROADLINE PAINT WHITE REFLECTIVE	TOA	SKIRTING FINISH ( รายการวัสดุบัวเชิงผนัง )					
F11	WATER STORAGE TANK	CONCRETE SLAB	CONCRETE FINISH WITH WATERPROOF SYSTEM, SIKA 1.5 MM SIKASHIELD W159 ED AT BOTTOM SLAB OR BUTTUTHANE 3000 HC AND WALL BELOW GROUND, SIKA TOPSEAL 107 INSIDE TANK ALL 6 SIDE	SIKA / GCP	SKIRT NO.	LOCATION	DESCRIPTION	SPECIFICATION	SUPPLIER	
F12	GREEN AREA	GRASS	GRASS ON 300 MM. SOIL DEPTH, GLASS SHALL BE TROPAL CARPET GLASS (MALAYSIA GLASS)	LOCAL	1	AS INDICATED		CONCRETE COLUMN OR WALL STRUCTURE	LOCAL	
F13	CDU PLATFORM, GENSET	PU FLOOR	CONCRETE FLOOR WITH SIKAFLOOR 359N	LOCAL	2	AS INDICATED		140 MM. THK CONCRETE BLOCK 2HR. FIRE RATE		
F14	SPARE SPACE	CONCRETE SLAB	CONCRETE STEEL TROWEL FINISH TO RECEIVE 6 MM. THK(MAX) CARPET FLOOR TILE	LOCAL	3	AS INDICATED		90 MM. THK CONCRETE BLOCK 2HR. FIRE RATE		
F15	STEEL GRATING FLOOR (FIBER,CHILLER PIPE RISER)		SEE STRUCTURAL ENGINEER DRAWING	LOCAL	4	AS INDICATED		15 MM.FIRERATED x 2 LAYERS( FIRE BLOC ) GYPSUM BOARD 2 HR. FIRE RATED + METAL STUD PROWALL ELEPHANT NO.24 C74U76 + 50 MM. NOIZEBLOC	SIAM GYPSUM SCG	
F16	STAGING ROOM	CONCRETE SLAB	CONCRETE STEEL TROWEL FINISH WITH 2 MM. VINYL SHEET ARMSTRONG PASTELL CONDUCTIVE	SIKA	5	AS INDICATED		120 MM. PRECAST CONCRETE PANEL REFER TO STRUCTURAL ENG. DWGS		
R1	ROOF DECK	CONCRETE SLAB	CONCRETE WITH INSULATION, SARNAFIL MEMBRANE 50 MM. XPS/SARNAFIL G410L SYSTEM (STANDARD BUILDUP XPS) AND 75 MM. THK CONCRETE COVER SLOPE TO ROOF DRAIN	SIKA	6	AS INDICATED		CONCRETE WALL WATER TIGHTNESS ( PVC WATER STOP SIKA WATER BARS )	SIKA	
R2	ROOF SLAB	CONCRETE SLAB	CONCRETE WITH 50 MM. XPS/SARNAFIL G410-L5L	SIKA	7	AS INDICATED	GYPSUM BOARD	15 MM. GYPSUM BOARD x 2 + METAL STUD PROWALL ELEPHANT NO.24 C74U76 + 50 MM. THK NOIZEBLOC	SIAM GYPSUM SCG	

SKIRTING FINISH ( รายการวัสดุบัวเชิงผนัง )					8	AS INDICATED		200 MM. THK RC WALL CLASS 3 BULLET PROOF	
SKIRT NO.	LOCATION	DESCRIPTION	SPECIFICATION	SUPPLIER	9	AS INDICATED		12.7 MM. GLASS BLOC + METAL STUD PROWALL ELEPHANT NO.24 C74U76 + 50 MM. THK NOIZEBLOC	
S1	MEP ROOM, CORRIDOR	SKIRTING	400 MM. HIGH 1.5 MM. THK ALUMINIUM PLATE	LOCAL	10	CHILLER PLANT	SANDWICH WALL PANEL	100 MM. THK ISOWALL ROCK WOOL 125 Kg/CUM 1150 MM. WIDTH RAL 9002	ISOWALL
S2	OFFICE	SKIRTING	100 MM. ALUMINIUM	ALLOY BUILD R SMART	11	TR ROOM	SANDWICH WALL PANEL	100 MM. THK ISOWALL-PIR 2500 MM. x 4500 MM. AND 3000 MM. x 4500 MM. RAL 9002	ISOWALL
S3	STAIR, PUMP ROOM	SKIRTING	100 MM. HIGH WALL PAINT	TOA					
S4	GOODS LIFT LOBBY	SKIRTING	973 MM. HIGH 1.5 MM. THK ALUMINIUM CHEQUER PLATE	LOCAL	NOTE	1. ALL RC. STRUCTURE SLAB AND WALL SHALL BE USE PVC. WATER STOP SIKa WATER BARS.			
S5	DATA HALL	SKIRTING	100 MM. HIGH PVC SKIRTING	LOCAL		2. ALL EQUIVALENT MATERIAL TO BE APPROVED BY DESIGN CONSULTANT			
S6	LOBBY	SKIRTING	100 MM. HIGH STAINLESS STEEL	LOCAL		3. ALL EQUIVALENT RAISED FLOOR MATERIALS TO BE APPROVED BY DESIGN CONSULTANT AND CLIENT			
S7	MDF	SKIRTING	100 MM. HIGH ANTI-STATIC VINYL SKIRTING	LOCAL		4. ALL GF. BOTTOM SLAB AND RC WALL SHALL BE WITH WATERPROOF SYSTEM 1.5 MM. SIKa SHIELD W159 ED OR BTTUTHANE 3000 HC BY GCP			
SK100	AS INDICATED	SKIRTING	REFER TO INTERIOR DESIGN DRAWINGS			5. ALL ALUMINIUM COMPOSITE PANEL SHALL BE NON-COMBUSTIBLE MATERIALS CORE A2 OR SOLID ALUMINIUM			

CEILING FINISH (รายการวัสดุฝ้าเพดาน)					6. ALL WATERPROOF IS A SYSTEM AND SHALL BE INCLUDE WITH ACCESSORIES FROM MANUFACTURE. INSTALLATION SHALL BE BY MANUFACTURE CERTIFY APPLICATOR
CEILING NO.	LOCATION	DESCRIPTION	SPECIFICATION	SUPPLIER	7. ALL EXTERNAL PAINT SHALL BE TOA SUPERSHIELD OR NIPPON PAINT WHEATHER AND INTERNAL PAINT SHALL BE TOA SUPERSHIELD DURACLEAN OR NIPPON PAINT HEALTH CARE
C1	LIFT LOBBY, CHECKED HALL	GYPSUM BOARD CEILING	9 MM. THK GYPSUM BOARD, 4 TAPERED EDGE, PLASTER WITH JOINT AND EMULSION PAINT WITH 600X600 MM. READY MADE ACCESS PANEL	SIAM GYPSUM SCG	8. PREFERRED STRUCTURAL CEILING GRID MANUFACTURER ARE CRS, TATE.
C2	LIFT LOBBY, CHECKED HALL	GYPSUM BOARD CEILING	9 MM. THK GYPSUM BOARD ON 600X600 MM. THK T-BAR AND EMULSION PAINT	SIAM GYPSUM SCG	
C3	SECURITY 2	ACOUSTIC CEILING	ACOUSTIC CEILING ON 600X1200 MM. T-BAR BH99, CORTEGA ARMSTRONG	SIAM GYPSUM SCG	
C4	CRAH, MEP ROOM, TRUCK, LOADING AREA	EXPOSED CEILING	EXPOSED CEILING SKIM COATED AND EMULSION PAINT	TOA	
C5	DROP-OFF	ALUMINIUM CEILING	2 MM. THK ALUCOLUX ALUMINIUM PANEL	BFM	
C6	WATER STORAGE TANK	EXPOSED CEILING	EXPOSED CEILING AND WATERPROOF SIKA TOPSEAL 107	SIKA	
C7	TOILET	GYPSUM BOARD CEILING	9 MM. THK MOISTURE RESISTANT GYPSUM BOARD 4 TAPER EDGE, PLASTER WITH READY MADE ACCESS PANEL	SIAM GYPSUM SCG	
C8	GENERATOR ROOM	EXPOSED CEILING	EXPOSED CEILING WITH EXTERNAL PAINT	ROCKWOOL	
C9	DATA HALL	EXPOSED CEILING	600X1200 MM. STRUCTURE CEILING GRID WITH CEILING TILE 580X1180 (THK) VINYL TOUCH DUST-FREE GYPSUM CEILING BOARD	TOA / TATE OR CRS	
C10	CHILLER PLANT ROOM	ACOUSTIC CEILING	EXPOSED CEILING PLASTER 100 MM. THK ROCKWOOL 80KG/m³ WRAP WITH BLACK GLASS CLOTH MECHANICAL FIXING		

7. ALL EXTERNAL PAINT SHALL BE TOA SUPERSHIELD OR NIPPON PAINT WHEATHER AND INTERNAL PAINT SHALL BE TOA SUPERSHIELD DURACLEAN OR NIPPON PAINT HEALTH CARE.

8. PREFERRED STRUCTURAL CEILING GRID MANUFACTURER ARE CRS, TATE.

8. PREFERRED STRUCTURAL CEILING GRID MANUFACTURER ARE CRS,TATE.


EXPOSED CEILING WITH EXTERNAL PAINT

600X1200 MM.STRUCTURE CEILING GIRD WITH CEILING TILE  
580X1180 (THK) VINYL TOUCH DUST-FREE  
GYPSUM CEILING BOARD

EXPOSED CEILING PLASTER 100 MM. THK ROCKWOOL 80KG/m<sup>3</sup> WRAP WITH BLACK GLASS CLOTH MECHANICAL FIXING



# T-Bar Ceiling



## Gypsum Ceiling Tile

Elephant Gypsum Ceiling Tile is made of Standard Gypsum Board cut in to specific size and put through the production process to make pattern and form as desired. The quality is consistent because it is pre - made from the factory. It is easy to use and can be separated in to 5 different types as follow;

Product name	Product Specification	Special Feature
<b>Gypsum Tile Vinyl Touch</b>	A Gypsum Ceiling Tile covered with white vinyl which has 6 beautiful patterns. Available in 2 sizes; 600x600x9 mm. and 600x1200x12 mm.	<ul style="list-style-type: none"> <li>• Easy to clean</li> <li>• Able to maintain a perfect condition at 90% relative humidity</li> <li>• Non-combustible</li> <li>• High light reflection</li> </ul>
<b>Gypsum Tile Dust-Free</b>	A Gypsum Ceiling Tile covers with white vinyl with smooth surface. The back side is glazed with red PVC and the sides are glazed with vinyl emulsion. Available in sizes; 600x600x9 mm. and 600x1200x12 mm.	<ul style="list-style-type: none"> <li>• Easy to clean</li> <li>• Protect against dust or dust built up in all sides of the board</li> <li>• Able to maintain a perfect condition at 90% relative humidity</li> <li>• Non-combustible</li> <li>• High light reflection</li> </ul>
<b>Gypsum Tile Textur Touch</b>	A Gypsum Ceiling Tile with the texture design and white color covered on the surface. Available in 5 different patterns with 2 sizes as follow; 600x600x9 mm. and 600x1200x12 mm.	<ul style="list-style-type: none"> <li>• Non-combustible</li> <li>• High light reflection</li> <li>• Well decorated designs</li> </ul>
<b>Gypsum Tile Color Touch</b>	A Gypsum Ceiling Tile covered with color on the surface from manufacture. Available in 4 different colors with 2 sizes as follow; 600x600x9 mm. and 600x1200x12 mm.	<ul style="list-style-type: none"> <li>• Immediate use without additional painting</li> <li>• Available in various plain color</li> <li>• Non-combustible</li> </ul>
<b>Gypsum Tile Paper Touch</b>	Gypsum Ceiling Tile covered with a paper laminate, printed in a range of design. Available in 5 different patterns in size 600x600x7.5 mm.	<ul style="list-style-type: none"> <li>• Available in various patterns and colors</li> <li>• Immediate use without additional painting</li> <li>• Non-combustible</li> </ul>

**Note:** Other than the 5 types of Gypsum Ceiling Tile, there are also other Gypsum Tiles made by cutting the big Elephant Gypsum Board in to small size of 60x60 cm. and 60x120 cm. The tiles were made to put on T- Bar framing from different Gypsum Board types as follow, Gypsum Board Standard, Moisture resistant type Moist Block and Heat resistant type Heat Block.

Elephant Gypsum T-Bar Ceiling is available in different system depends on quality of tiles as follow;

Ref.	System Name	Gypsum T-Bar Ceiling Used	Scope of Work
GT01	ELE' STD 9 mm 60x60 CT S#ELE32	Elephant Gypsum Board Standard T-Bar Ceiling thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	Use as general ceiling in any room such as office, Department store, hotel or school
GT03	ELE' STD 12 mm 60x60 CT S#ELE32	Elephant Gypsum Board Standard T-Bar Ceiling thickness of 12 mm. size 60x120 cm. on Elephant T-Bar frame size 60.5x121 cm.	Use as general ceiling in any room such as office, Department store, hotel or school
GT05	HeatBloc 9 mm 60x60 CT S#ELE32	Heat Resistant Gypsum Board T-Bar Ceiling, Heat Bloc thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	Use as Ceiling for room that needs extra heat protection such as room under the roof, attic
GT07	HeatBloc 12 mm 60x120 CT S#ELE32	Heat Resistant Gypsum Board T-Bar Ceiling, Heat Bloc thickness of 12 mm. size 60x120 cm. on Elephant T-Bar frame size 60.5x121 cm.	Use as Ceiling for room that needs extra heat protection such as room under the roof, attic
GT09	MoistBloc 9 mm 60x60 CT S#ELE32	Moisture Resistant Gypsum Board T-Bar Ceiling, Moist Bloc thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	Use as Ceiling for the area that directly face to the moisture such as bathroom, kitchen, food court and eaves
GT11	MoistBloc 12 mm 60x120 CT S#ELE32	Moisture Resistant Gypsum Board T-Bar Ceiling, Moist Bloc thickness of 12 mm. size 60x120 cm. on Elephant T-Bar frame size 60.5x121 cm.	Use as Ceiling tile for the area that often receive moisture such as bathroom, kitchen, food court and eaves
GT13	Paper Touch 7.5 mm. 60x60 CT S#ELE32	Paper Touch thickness of 7.5 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	Use as Ceiling for the area that needs pattern and beautiful decoration such as office, department store, hotel and school
GT15	Texture Touch 9 mm 60x60 CT S#ELE32	Textur Touch thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	Use as Ceiling for the area that needs pattern and beautiful decoration such as office, department store, hotel and school

Ref.	System Name	Gypsum T-Bar Ceiling Used	Scope of Work
GT17	Texture Touch 12 mm 60x120 CT S#ELE32	Textur Touch thickness of 12 mm. size 60x120 cm. on Elephant T-Bar frame size 60.5x121 cm.	Use as Ceiling for the area that needs pattern and beautiful decoration such as office, department store, hotel and school
GT19	Color Touch 9 mm 60x60 CT S#ELE32	Color Touch thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5cm.	Use as Ceiling for the area that needs pattern and beautiful decoration such as office, department store, hotel and school
GT21	Color Touch 12 mm 60x120 CT S#ELE32	Color Touch on Elephant T-Bar frame size 60.5x121 cm.	Use as Ceiling for the area that needs pattern and beautiful decoration such as office, department store, hotel and school
GT23	Vinyl Touch 9 mm 60x60 CT S#ELE32	Vinyl Touch thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	There are beautiful patterns and it's easy to clean up, suitable for ceiling in the kitchen, food court, bathroom, examination room, laboratory
GT25	Vinyl Touch 12 mm 60x120 CT S#ELE32	Vinyl Touch thickness of 12 mm. size 60x120 cm. on Elephant T-Bar frame size 60.5x121 cm.	There are beautiful patterns and it's easy to clean up, suitable for ceiling in the kitchen, food court, bathroom, examination room, laboratory
GT27	DustFree 9 mm 60x60 CT S#ELE32	Dust-Free thickness of 9 mm. size 60x60 cm. on Elephant T-Bar frame size 60.5x60.5 cm.	Suitable for extra hygienic area with Dust free such as laboratory, manufacture, electronic manufacture, food manufacture
GT28	DustFree 12 mm 60x120 CT S#ELE32	Dust-Free thickness of 12 mm. size 60x120 cm. on Elephant T-Bar frame size 60.5x121 cm.	Suitable for extra hygienic area with Dust free such as laboratory, manufacture, electronic manufacture, food manufacture



Pre-Order



**SCG T-Bar ColorTouch Diamond 600x600x9 mm**



**8852429422602**

Item number 71058338



Brand

SCG Gypsum Board

★★★★★ (0)



**Dimension**

600x600x9 mm Packing: 8 pcs/box




**Weight per piece (kg)**

2.00



**Package**

8 Pieces/Pack

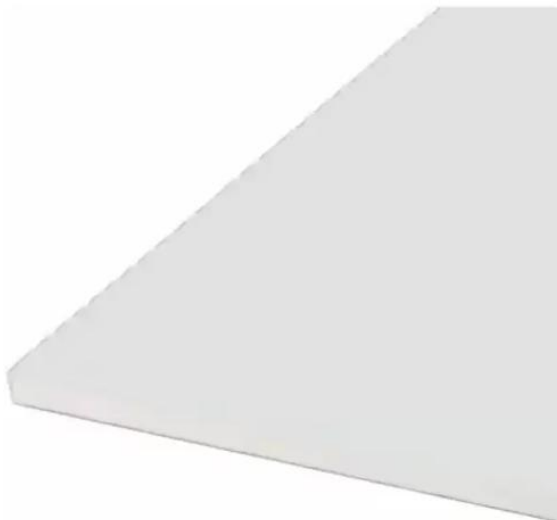

Pre-Order



**SCG T-Bar Dust Free (Nova White) 600x600x9 mm**

**8852429437071**

Item number 67916439



Brand

SCG Gypsum Board

★★★★



**Dimension**

600x600x9 mm 8 pcs/box



**Weight per piece (kg)**

2.00



**Package**

8 Pieces/Pack



Pre-Order



**SCG T-Bar ColorTouch Diamond 600x600x9 mm**

**8852429422602**

Item number 71058338



Brand

SCG Gypsum Board

★★★



**Dimension**

600x600x9 mm Packing: 8 pcs/box



**Weight per piece (kg)**

2.00



**Package**

8 Pieces/Pack





Pre-Order

**TexturTouch Starfish PH 01 600x600x9 mm**

**8852429422725**

Item number 20359715



Brand

SCG Gypsum Board



Pre-Order

**TexturTouch Dolphin NF 02 600x600x9 mm**

**8852429422701**

Item number 24435145



Brand

SCG Gypsum Board



**Dimension**

600x600x9 mm Packing : 9 mm 8 pcs/box




**Weight per piece (kg)**

2.00



**Package**

8 Pieces/Pack

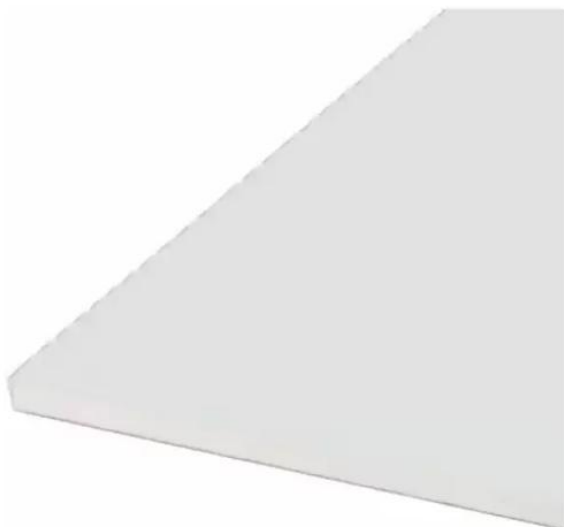

Pre-Order

**SCG T-Bar Dust Free (Nova White) 600x600x9 mm**

**8852429437071**

Item number 67916439



Brand

SCG Gypsum Board



**Dimension**

600x600x9 mm 8 pcs/box



**Weight per piece (kg)**

2.00



**Package**

8 Pieces/Pack