
31/10/26

WEEK - 4

Page No.
Date:

Lab - 4 Configuration of DNS and Web Server within a LAN using CPT

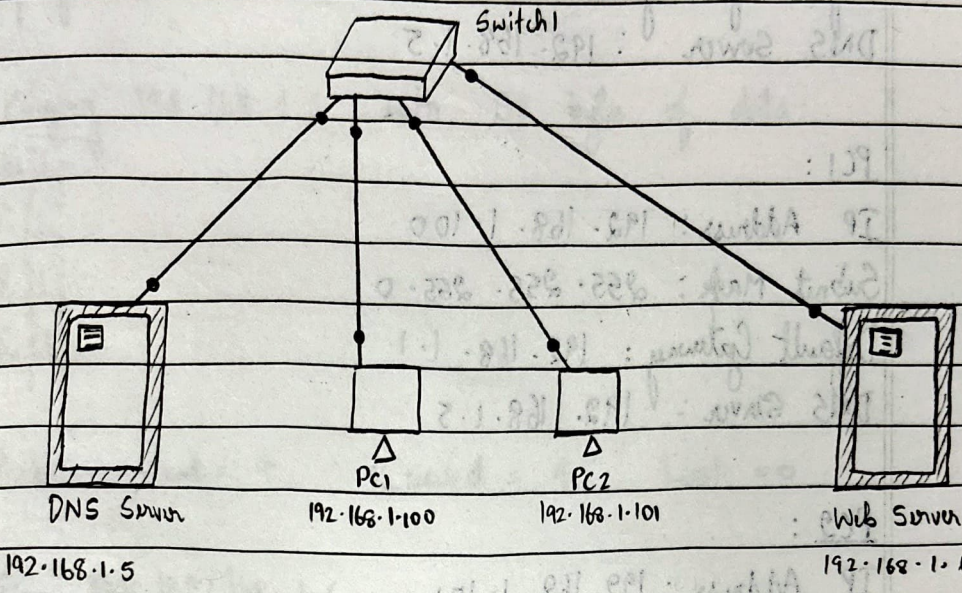

Procedure:

→ Add two servers and rename them as "DNS" and "Web Server"
→ Add two PCs: PC1 & PC2
→ Add a switch (Switch1) and connect it to all the end devices

Follow the given configurations:

DNS Server:

IP Address: 192.168.1.5
Subnet Mask: 255.255.255.0
Default Gateway: 192.168.1.1
DNS Server: 192.168.1.5

Page No.
Date:

Web Server:
IP Address: 192.168.1.6
Subnet Mask: 255.255.255.0
Default Gateway: 192.168.1.1
DNS Server: 192.168.1.5

PC1:
IP Address: 192.168.1.100
Subnet Mask: 255.255.255.0
Default Gateway: 192.168.1.1
DNS Server: 192.168.1.5

PC2:
IP Address: 192.168.1.101
<< Rest Same as Above >>

Add Record in DNS Server as:
Name: www.bmsce.com
Type: A Record
Address: 192.168.1.6

Edit helloworld.html file on Web server:

```
<html>
Hello, World! Welcome to BMSCE
<br> <a href='index.html'> Back </a>
</html>
```

Page No.
Date:

Verification:

On PC1 / PC2 :

① ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:
Reply...
Reply...
Reply...
Reply...

Packets : Sent = 4, Recieved = 4, Lost = 0

② ping 192.168.1.6

Pinging 192.168.1.6 with 32 bytes of data
Reply x4...
Packets: Sent = 4, Recieved = 4, Lost = 0

③ Accessing the web Server :
PC1 / PC2 → Desktop → Web Browser
URL : www.bmsce.com
Click : "A small page"

Hello, World! Welcome to BMSCE
Back

31/10/24

Result: The DNS and Web Servers were successfully configured within a LAN using CPT. Both client computers successfully communicated with the servers, resolved the domain name into corresponding IP address, and accessed the web page using the domain name.