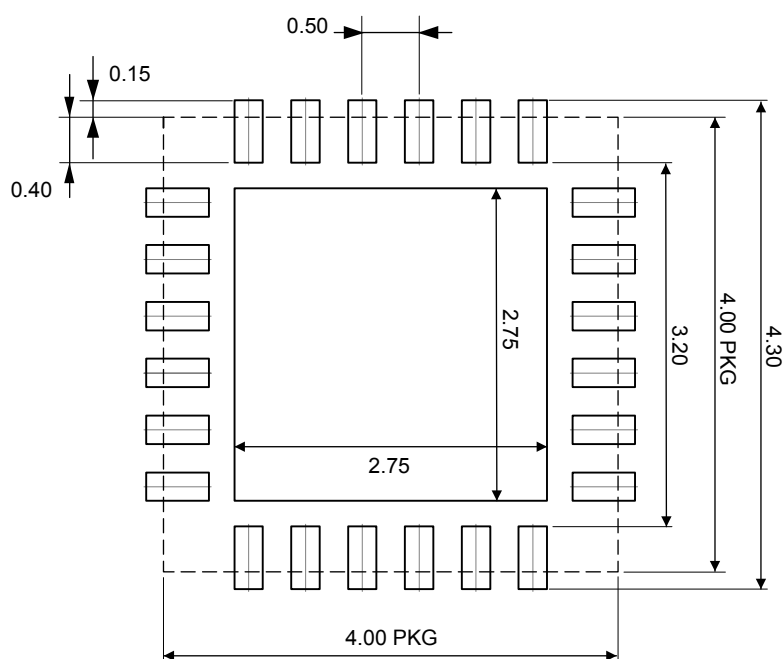


**Table 74. UFQFPN24 - Mechanical data**

| Symbol            | Millimeters |      |      | Inches <sup>(1)</sup> |        |        |
|-------------------|-------------|------|------|-----------------------|--------|--------|
|                   | Min         | Typ  | Max  | Min                   | Typ    | Max    |
| A                 | 0.45        | -    | 0.60 | 0.0177                | -      | 0.0236 |
| A1                | 0           | -    | 0.05 | 0                     | -      | 0.0020 |
| A3 <sup>(2)</sup> | 0.152 REF   |      |      | 0.0060 REF            |        |        |
| L                 | 0.30        | 0.40 | 0.50 | 0.0118                | 0.0157 | 0.0197 |
| b                 | 0.18        | 0.25 | 0.30 | 0.0071                | 0.0098 | 0.0118 |
| D <sup>(3)</sup>  | 4.00 BSC    |      |      | 0.1575 BSC            |        |        |
| E <sup>(3)</sup>  | 4.00 BSC    |      |      | 0.1575 BSC            |        |        |
| e <sup>(3)</sup>  | 0.50 BSC    |      |      | 0.0197 BSC            |        |        |
| D2                | 2.60        | -    | 2.85 | 0.1024                | -      | 0.1122 |
| E2                | 2.60        | -    | 2.85 | 0.1024                | -      | 0.1122 |
| bbb               | -           | 0.10 | -    | -                     | 0.0039 | -      |
| ccc               | -           | 0.10 | -    | -                     | 0.0039 | -      |
| eee               | -           | 0.08 | -    | -                     | 0.0031 | -      |
| N <sup>(4)</sup>  | 24          |      |      | 24                    |        |        |

1. Values in inches are converted from mm and rounded to three decimal digits.
2. REF stands for reference.
3. BSC stands for basic dimensions. It corresponds to the nominal value and has no tolerance. For tolerances refer to the form and position table
4. Total number of terminals

**Figure 42. UFQFPN24 - Footprint example**


3Z\_UFQFPN24\_FP\_V1

1. Dimensions are expressed in millimeters.