


**Z1901**12 X 12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR 8
[203] SUMP DEPTH**FS-1**

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

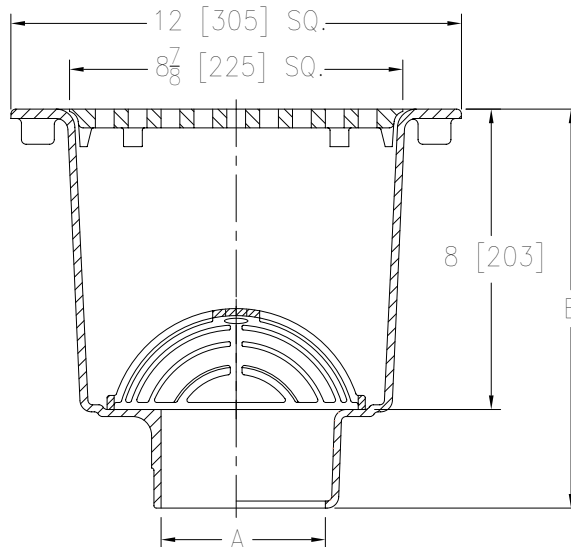

'A' Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq.In. [cm ²]
2, 3, 4 [51, 76, 102]	34 [15]	31 [200]

ENGINEERING SPECIFICATION: ZURN Z1901

Sani-Flor Receptor 12" x 12" x 8" [305mm x 305mm x 203mm] deep cast iron body and square, light-duty grate with 1/2" [13mm] slotted openings, white acid resisting porcelain enamel interior and top, complete with white ABS anti-splash interior bottom dome strainer.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

3, 4 [76, 102]
2, 3, 4 [51, 76, 102]
2, 3, 4 [51, 76, 102]

(Specify size/type) **OUTLET**

___ IC Inside Caulk
___ NH No-Hub
___ NL Neo-Loc

'E' BODY HT. DIMENSION.**Z****ZN/ZS**

10-5/8 [270] 11-1/8 [283]
10-5/8 [270] 11-1/8 [283]
10 [254] 10-1/2 [267]

PREFIXES

___ Z Cast Iron Body with White A.R.E. Interior*
___ ZN Cast Iron Body with White A.R.E. Interior, 12-1/2 [317] Square N.B. Frame and Full Grate with 1/2 [13] Square Openings (Add 1/2 [13] to 12 [305] Dim.)
___ ZS Cast Iron Body with White A.R.E. Interior, 12-1/2 [317] Square Stainless Steel Frame and Full Grate with 1/2 [13] Square Openings (Add 1/2 [13] to 12 [305] Dim.)

SUFFIXES

___ -DX	Dex-O-Tex Flange (ZN Only)	___ -4	Full Grate w/ Center Opening (2 [51] Dia. for Z) and (3-1/32 [77] Square for ZN & ZS)
___ -HD	Stainless Steel Frame w/ Extra-Heavy Duty Stainless Steel Grate (ZS Only)	___ -6	Grate w/ 6 [152] Dia. x 6 [152] High Funnel
___ -HP	Heel-Proof Grate (ZN Only)	___ -7	Grate w/ 6-3/4 x 3 x 1 [171 x 76 x 25] High Oval Funnel
___ -K	Anchor Flange	___ -8	Grate w/ 8-7/8 x 3-5/8 x 3-3/4 [225 x 92 x 95] High Oval Funnel
___ -KC	Anchor Flange with Seepage Holes and Clamp Collar (Less) Bottom Dome Strainer	___ -11	Vandal-Proof Secured Top (ZN & ZS Only)
___ -LD	1/2 [13] Trap Primer Connection (See Z1023)	___ -15	Solid Loose Set Cover (Z & ZN Only)
___ -P	Neo-Loc Test Cap Gasket	___ -19	Full Hinged Grate (ZN Only)
___ -TC	Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)	___ -23	Aluminum Bucket
___ -VPS	Vandal-Proof Strainer	___ -25	White A.R.C. Bucket
___ -1	(Less) Grate	___ -31	Stainless Steel Mesh Liner for Bucket
___ -2	1/2 Grate	___ -32	Aluminum Dome Strainer
___ -3	3/4 Grate	___ -33	White A.R.C. Anti-Splash Bottom Dome Strainer

* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. N
Date: 01/12/23
C.N. No. 144899
Patent zurn.com/patents
Prod. | Dwg. No. Z1901