

Xena2544 Test Report

Test Summary

Test company: Xena Networks
Customer: Xena Networks
Test Date and Time: 2016-04-15, 04:51

Generated By: Xena2544 v2.33 on Windows

Test Setup

Test Configuration

Main Test Options

Topology: Blocks
Direction: Bidirectional
Frame Size Type: IEEE Default

Frame Sizes Used: 64,128,256,512,1024,1280,1518

Toggle Port Sync:YesSync Off Duration:1 secondsSync On Delay:1 seconds

Flow Creation Type: Stream-based

Enable Multi-Stream: No

Test Type Selection

Throughput Test: Enabled
Latency and Jitter Test: Enabled
Frame Loss Rate Test: Enabled
Back-to-Back Test: Enabled

Port Configuration

Used Chassis Summary

Chassis ID	Chassis Name	Address and Port
C-0	New chassis	172.16.255.200:22606

Used Ports Summary

Port ID	Interface Type	Port Group	Port Peer	Port Speed	Port Rate
P-0-0-1	SFP-O LR 1310 nm	East	N/A	AUTO	77 M
P-0-0-2	SFP-O LR 1310 nm	West	N/A	AUTO	77 M
P-0-2-0	SFP-O LR 1310 nm	East	N/A	AUTO	77 M
P-0-2-1	SFP-O LR 1310 nm	East	N/A	AUTO	77 M
P-0-2-2	SFP-O LR 1310 nm	West	N/A	AUTO	77 M
P-0-2-3	SFP-O LR 1310 nm	West	N/A	AUTO	77 M
P-0-2-4	SFP-O LR 1310 nm	East	N/A	AUTO	77 M
P-0-2-5	SFP-O LR 1310 nm	West	N/A	AUTO	77 M
P-0-4-1	SFP-O LR 1310 nm	East	N/A	AUTO	77 M
P-0-4-2	SFP-O LR 1310 nm	West	N/A	AUTO	77 M
P-0-4-3	SFP-O LR 1310 nm	East	N/A	AUTO	77 M
P-0-4-4	SFP-O LR 1310 nm	West	N/A	AUTO	77 M
P-0-4-5	SFP-O LR 1310 nm	East	N/A	AUTO	77 M

Port Traffic Setup

Port ID	IP Address & Gateway	Protocol Segment Profile
P-0-0-1	No address specified	2: Ethernet / VLAN (5)
P-0-0-2	No address specified	7: Ethernet / VLAN (6)

Image not found.

P-0-2-0	No address specified	7: Ethernet / VLAN (6)
P-0-2-1	No address specified	2: Ethernet / VLAN (5)
P-0-2-2	No address specified	7: Ethernet / VLAN (6)
P-0-2-3	No address specified	2: Ethernet / VLAN (5)
P-0-2-4	No address specified	7: Ethernet / VLAN (6)
P-0-2-5	No address specified	2: Ethernet / VLAN (5)
P-0-4-1	No address specified	7: Ethernet / VLAN (6)
P-0-4-2	No address specified	2: Ethernet / VLAN (5)
P-0-4-3	No address specified	7: Ethernet / VLAN (6)
P-0-4-4	No address specified	2: Ethernet / VLAN (5)
P-0-4-5	No address specified	7: Ethernet / VLAN (6)

Throughput Test Results

Test Setup

Duration: 1 seconds

Iteration: 1

Initial Rate: 100.000 %

Maximum Rate: 100.000 %

Minimum Rate: 0.100 %

Resolution: 0.500 %

Use Pass Threshold: No

Pass Threshold: 0.000 %

Acceptable Loss: 0.000 %

Rate Result Scope: Common Result

Use Fast Binary Search: No

Test Results

Frame Size	64	128	256	512	1024	1280
Result State	PASS	PASS	PASS	PASS	PASS	PASS
Tx Rate (Percent)	98.439 %	100 %	100 %	100 %	100 %	100 %
Tx (Frames)	1,466,304	845,376	453,306	235,158	119,826	96,180
Tx Rate (L1) (Bit/s)	985.36 M	1 G	1 G	1 G	1 G	1 G
Tx Rate (L2) (Bit/s)	750.75 M	865.67 M	928.37 M	963.21 M	981.61 M	984.88 M
Tx Rate (Fps)	1,466,304	845,376	453,306	235,158	119,826	96,180
Rx (Frames)	1,466,304	845,376	453,306	235,158	119,826	96,180
Loss (Frames)	0	0	0	0	0	0
Loss Rate (Percent)	0 %	0 %	0 %	0 %	0 %	0 %
P-0-0-1						
- Tx (Frames)	112,794	65.028	34.872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29.886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15,504	7,902	6,342
P-0-0-2	,-	,	-,	- 7	,	- , -
- Tx (Frames)	112,791	65,030	34.867	18,088	9,219	7,399
- Tx Rate (L1) (Bit/s)	75.8 M	77 M	76.99 M	76.98 M	77 M	76.95 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.41 M	74.09 M	75.52 M	75.77 M
- Tx Rate (Fps)	112,791	65,030	34,867	18,088	9,219	7,399
- Rx (Frames)	131,593	75,866	40,684	21,105	10,752	8,631
- Rx Rate (L1) (Bit/s)	88.43 M	89.83 M	89.83 M	89.82 M	89.8 M	89.76 M
- Rx Rate (L2) (Bit/s)	67.38 M	77.69 M	83.32 M	86.45 M	88.08 M	88.38 M
- Rx Rate (Fps)	131,593	75,866	40,684	21,105	10,752	8,631
P-0-2-0	, , , , , ,	-,	-,	,	-, -	-,
- Tx (Frames)	112,794	65,028	34,872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29,886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15,504	7,902	6,342
P-0-2-1		·				
- Tx (Frames)	112,794	65,028	34,872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29,886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15,504	7,902	6,342
P-0-2-2						•
- Tx (Frames)	112,791	65,030	34,867	18,088	9,219	7,399


Image not found.

- Tx Rate (L1) (Bit/s)	75.8 M	77 M	76.99 M	76.98 M	77 M	76.95 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.41 M	74.09 M	75.52 M	75.77 M
- Tx Rate (Fps)	112,791	65,030	34,867	18,088	9,219	7,399
- Rx (Frames)	131,593	75,866	40,684	21,105	10,752	8,631
- Rx Rate (L1) (Bit/s)	88.43 M	89.83 M	89.83 M	89.82 M	89.8 M	89.76 M
- Rx Rate (L2) (Bit/s)	67.38 M	77.69 M	83.32 M	86.45 M	88.08 M	88.38 M
- Rx Rate (Fps)	131,593	75,866	40,684	21,105	10,752	8,631
P-0-2-3						
- Tx (Frames)	112,791	65,030	34,867	18,088	9,219	7,399
- Tx Rate (L1) (Bit/s)	75.8 M	77 M	76.99 M	76.98 M	77 M	76.95 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.41 M	74.09 M	75.52 M	75.77 M
- Tx Rate (Fps)	112,791	65,030	34,867	18,088	9,219	7,399
- Rx (Frames)	131,593	75,866	40.684	21,105	10,752	8,631
- Rx Rate (L1) (Bit/s)	88.43 M	89.83 M	89.83 M	89.82 M	89.8 M	89.76 M
- Rx Rate (L2) (Bit/s)	67.38 M	77.69 M	83.32 M	86.45 M	88.08 M	88.38 M
- Rx Rate (Fps)	131,593	75,866	40,684	21,105	10,752	8,631
P-0-2-4						
- Tx (Frames)	112,794	65,028	34,872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29,886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15,504	7,902	6,342
P-0-2-5		,		,	. ,00=	5,5 12
	440 704	05.000	04.007	40.000	0.040	7 000
- Tx (Frames)	112,791	65,030	34,867	18,088	9,219	7,399
- Tx Rate (L1) (Bit/s)	75.8 M	77 M	76.99 M	76.98 M	77 M	76.95 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.41 M	74.09 M	75.52 M	75.77 M
- Tx Rate (Fps)	112,791	65,030	34,867	18,088	9,219	7,399
- Rx (Frames)	131,593	75,866	40,684	21,105	10,752	8,631
- Rx Rate (L1) (Bit/s)	88.43 M	89.83 M	89.83 M	89.82 M	89.8 M	89.76 M
- Rx Rate (L2) (Bit/s)	67.38 M	77.69 M	83.32 M	86.45 M	88.08 M	88.38 M
- Rx Rate (Fps)	131,593	75,866	40,684	21,105	10,752	8,631
P-0-4-1	101,000	70,000	70,007	21,100	10,702	0,001
			0	10.000	0.040	
- Tx (Frames)	112,794	65,028	34,872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29,886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15.504	7,902	6,342
	30,010	33,740	23,000	10,004	1,502	0,042
P-0-4-2						
- Tx (Frames)	112,791	65,030	34,867	18,088	9,219	7,399
- Tx Rate (L1) (Bit/s)	75.8 M	77 M	76.99 M	76.98 M	77 M	76.95 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.41 M	74.09 M	75.52 M	75.77 M
- Tx Rate (Fps)	112,791	65,030	34,867	18,088	9,219	7,399
- Rx (Frames)	131,593	75,866	40,684	21,105	10,752	8,631
- Rx Rate (L1) (Bit/s)	88.43 M	89.83 M	89.83 M	89.82 M	89.8 M	89.76 M
- Rx Rate (L2) (Bit/s)	67.38 M	77.69 M	83.32 M	86.45 M	88.08 M	88.38 M
- Rx Rate (Fps)	131,593	75,866	40,684	21,105	10,752	8,631
<u> </u>	131,383	10,000	40,004	۷۱,۱۷۵	10,732	0,031
P-0-4-3						
- Tx (Frames)	112,794	65,028	34,872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29,886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15,504	7,902	6,342
P-0-4-4						
- Tx (Frames)	112,791	65,030	34,867	18,088	9,219	7,399
- Tx Rate (L1) (Bit/s)	75.8 M	77 M	76.99 M	76.98 M	77 M	76.95 M
` ' ' ` '						
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.41 M	74.09 M	75.52 M	75.77 M
- Tx Rate (Fps)	112,791	65,030	34,867	18,088	9,219	7,399
- Rx (Frames)	131,593	75,866	40,684	21,105	10,752	8,631
	88.43 M	89.83 M	89.83 M	89.82 M	89.8 M	89.76 M
- Rx Rate (I 1) (Rit/s)			00.00 IVI	00.02 IVI	JJ.U IVI	00.70 10
- Rx Rate (L1) (Bit/s)				QC 45 N4	QQ AQ N4	00 20 14
- Rx Rate (L1) (Bit/s) - Rx Rate (L2) (Bit/s) - Rx Rate (Fps)	67.38 M 131,593	77.69 M 75,866	83.32 M 40,684	86.45 M 21,105	88.08 M 10,752	88.38 M 8,631

- Tx (Frames)	112,794	65,028	34,872	18,090	9,216	7,398
- Tx Rate (L1) (Bit/s)	75.8 M	76.99 M	77 M	76.99 M	76.97 M	76.94 M
- Tx Rate (L2) (Bit/s)	57.75 M	66.59 M	71.42 M	74.1 M	75.5 M	75.76 M
- Tx Rate (Fps)	112,794	65,028	34,872	18,090	9,216	7,398
- Rx (Frames)	96,678	55,740	29,886	15,504	7,902	6,342
- Rx Rate (L1) (Bit/s)	64.97 M	66 M	65.99 M	65.99 M	66 M	65.96 M
- Rx Rate (L2) (Bit/s)	49.5 M	57.08 M	61.21 M	63.5 M	64.73 M	64.94 M
- Rx Rate (Fps)	96,678	55,740	29,886	15,504	7,902	6,342

Frame Size	1518
Result State	PASS
Tx Rate (Percent)	100 %
Tx (Frames)	81,354
Tx Rate (L1) (Bit/s)	1 G
Tx Rate (L2) (Bit/s)	987.96 M
Tx Rate (Fps)	81,354
Rx (Frames)	81,354
Loss (Frames)	01,334
Loss Rate (Percent)	0 %
P-0-0-1	0.050
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364
P-0-0-2	0,004
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	7,301
- Rx Rate (L1) (Bit/s)	89.83 M
- Rx Rate (L2) (Bit/s)	88.66 M
- Rx Rate (Fps)	7,301
P-0-2-0	,
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L1) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364
P-0-2-1	
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364
P-0-2-2	
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	7,301
- Rx Rate (L1) (Bit/s)	89.83 M
- Rx Rate (L2) (Bit/s)	88.66 M
- Rx Rate (Fps)	7,301
	7,501
P-0-2-3	0.050
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	7,301

Dv Dete (I.4) (Dit/e)	00.00.14
- Rx Rate (L1) (Bit/s)	89.83 M
- Rx Rate (L2) (Bit/s)	88.66 M
- Rx Rate (Fps)	7,301
P-0-2-4	0.050
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364
P-0-2-5	0.050
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	7,301
- Rx Rate (L1) (Bit/s)	89.83 M
- Rx Rate (L2) (Bit/s)	88.66 M
- Rx Rate (Fps)	7,301
P-0-4-1	
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364
P-0-4-2	-,
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	7,301
- Rx Rate (L1) (Bit/s)	89.83 M
- Rx Rate (L2) (Bit/s)	88.66 M
- Rx Rate (Fps)	7,301
P-0-4-3	7,501
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L1) (Bit/s)	76 M
- Tx Rate (L2) (Bivs)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364
P-0-4-4	0.050
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	7,301
- Rx Rate (L1) (Bit/s)	89.83 M
- Rx Rate (L2) (Bit/s)	88.66 M
- Rx Rate (Fps)	7,301
P-0-4-5	
- Tx (Frames)	6,258
- Tx Rate (L1) (Bit/s)	77 M
- Tx Rate (L2) (Bit/s)	76 M
- Tx Rate (Fps)	6,258
- Rx (Frames)	5,364
- Rx Rate (L1) (Bit/s)	66 M
- Rx Rate (L2) (Bit/s)	65.14 M
- Rx Rate (Fps)	5,364

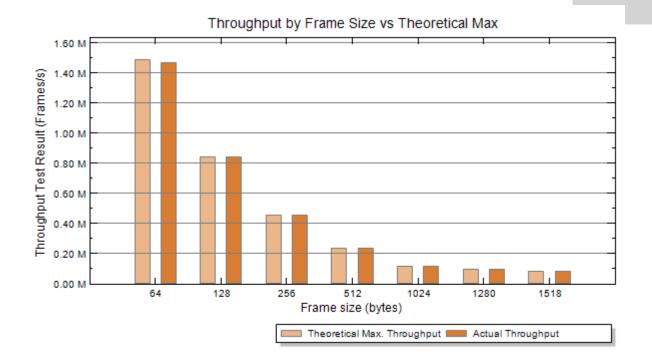

Latency and Jitter Test Results

Test Setup

Duration: 1 seconds

Iteration: 1


Latency Mode: Last-To-Last


Relative to Throughput: Yes

Test Results

Frame Size	64
Result State	PASS
Tx Rate (Percent)	49.22 %
Tx Rate (L1) (Bit/s)	492.65 M
Tx Rate (Fps)	733,110
Tx (Frames)	733,110
Rx (Frames)	733,110
P-0-0-1	700,110
- Tx (Frames)	56,394
- Rx (Frames)	48,336
- Avg Latency (micsec)	5.167
- Min Latency (micsec)	2.238
- Max Latency (micsec)	9.992
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	4.762
P-0-0-2	50.000
- Tx (Frames)	56,392
- Rx (Frames)	65,793
- Avg Latency (micsec)	5.505
- Min Latency (micsec)	2.238
- Max Latency (micsec)	16.294
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	7.913
P-0-2-0	
- Tx (Frames)	56,394
- Rx (Frames)	48,336
- Avg Latency (micsec)	3.133
- Min Latency (micsec)	1.998
- Max Latency (micsec)	8.965
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	5.628
P-0-2-1	
- Tx (Frames)	56,394
- Rx (Frames)	48,336
- Avg Latency (micsec)	3.112
- Min Latency (micsec)	1.974
- Max Latency (micsec)	10.842
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	7.240
P-0-2-2	7.240
	EG 202
- Tx (Frames)	56,392
- Rx (Frames)	65,793
- Avg Latency (micsec)	3.469
- Min Latency (micsec)	2.046
- Max Latency (micsec)	11.932
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	7.336
P-0-2-3	
- Tx (Frames)	56,392
- Rx (Frames)	65,793
- Avg Latency (micsec)	3.420

- Min Latency (micsec)	2.046
- Max Latency (micsec)	12.004
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	5.773
P-0-2-4	
- Tx (Frames)	56,394
- Rx (Frames)	48,336
- Avg Latency (micsec)	3.183
- Min Latency (micsec)	1.974
- Max Latency (micsec)	9.527
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	7.120
P-0-2-5	
- Tx (Frames)	56,392
- Rx (Frames)	65,793
- Avg Latency (micsec)	3.453
- Min Latency (micsec)	2.046
- Max Latency (micsec)	11.980
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	6.783
P-0-4-1	
- Tx (Frames)	56,394
- Rx (Frames)	48,336
	3.253
- Avg Latency (micsec)	
- Min Latency (micsec)	2.094
- Max Latency (micsec)	7.266
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	2.910
P-0-4-2	
- Tx (Frames)	56,392
- Rx (Frames)	65,793
- Avg Latency (micsec)	4.436
Min Latency (misses)	1.148
- Min Latency (micsec)	
- Max Latency (micsec)	14.482
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	8.755
P-0-4-3	
- Tx (Frames)	56,394
- Rx (Frames)	48,336
- Avg Latency (micsec)	4.091
- Min Latency (micsec)	1.148
- Max Latency (micsec)	8.011
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	5.027
P-0-4-4	
- Tx (Frames)	56,392
- Rx (Frames)	65,793
- Avg Latency (micsec)	3.507
- Min Latency (micsec)	2.094
- Max Latency (micsec)	12.726
- Avg Jitter (micsec)	0.000
- Min Jitter (micsec)	0.000
- Max Jitter (micsec)	5.869
P-0-4-5	
- Tx (Frames)	56,394
- Rx (Frames)	48,336
- Avg Latency (micsec)	3.217
	5.217
- Min Latency (micsec)	2.070
- Min Latency (micsec) - Max Latency (micsec)	2.070 7.426
- Min Latency (micsec) - Max Latency (micsec) - Avg Jitter (micsec)	2.070 7.426 0.000
- Min Latency (micsec) - Max Latency (micsec)	2.070 7.426

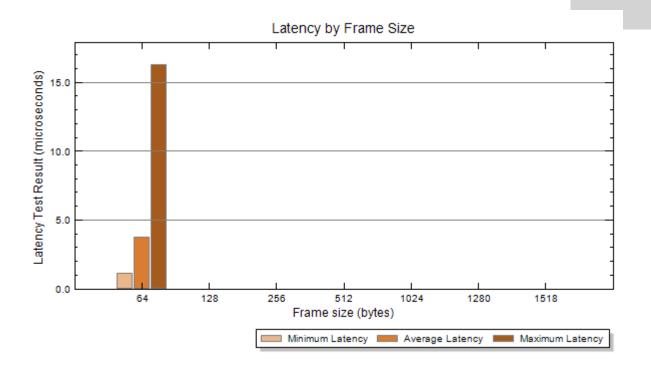

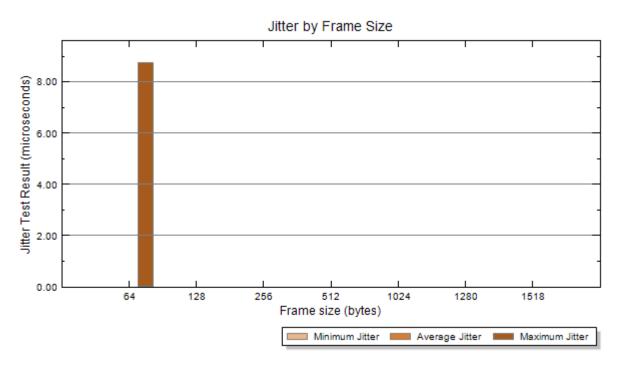



Frame Loss Rate Test Results

Test Setup

Duration: 1 seconds

Iteration: 1

Test Results

No test results available!



Back-to-Back Test Results

Test Setup

Duration: 1 seconds

Iteration: 1

Rate Result Scope: Common Result

Test Results

No test results available!