SkyG Speed 90B · revision C6B-13 · 2026-10-11 - carbon tube 40 x 38 mm, x 50-370 (320 mm) - cutting template page 1/3

Red: cut out (windows) or drill 5 mm (crosses; a printed countersunk washer goes in each). Wrap the strip round the tube, ends flush, the TOP line along the top; tape it. Cut inside the red line with a diamond disc, file to the line, round the corners (r 3).

Carbon dust: FFP3 mask, vacuum at the disc or cut wet, eye protection. Seal every cut edge and hole with thin CA (carbon conducts: no bare edge may touch a wire).

FRONT END of the tube (x 50): align the strip's edge with the cut tube end

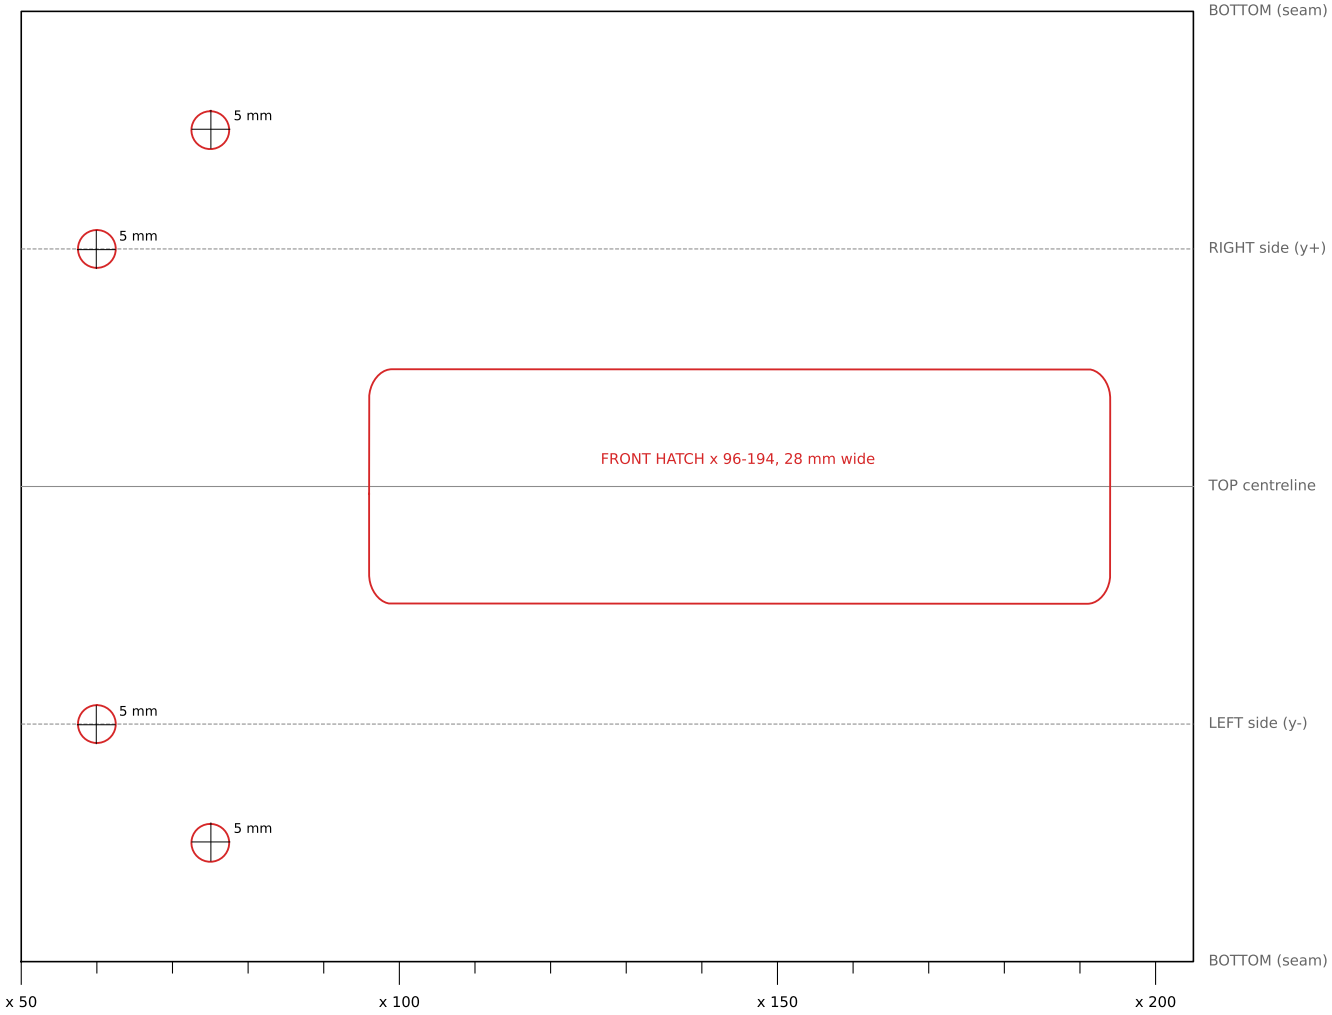

100 mm: measure this before cutting (print at 100 %, no scaling)

SkyG Speed 90B · revision C6B-13 · 2026-10-11 - carbon tube 40 x 38 mm, x 50-370 (320 mm) - cutting template page 2/3

Red: cut out (windows) or drill 5 mm (crosses; a printed countersunk washer goes in each). Wrap the strip round the tube, ends flush, the TOP line along the top; tape it. Cut inside the red line with a diamond disc, file to the line, round the corners (r 3).

Carbon dust: FFP3 mask, vacuum at the disc or cut wet, eye protection. Seal every cut edge and hole with thin CA (carbon conducts: no bare edge may touch a wire).

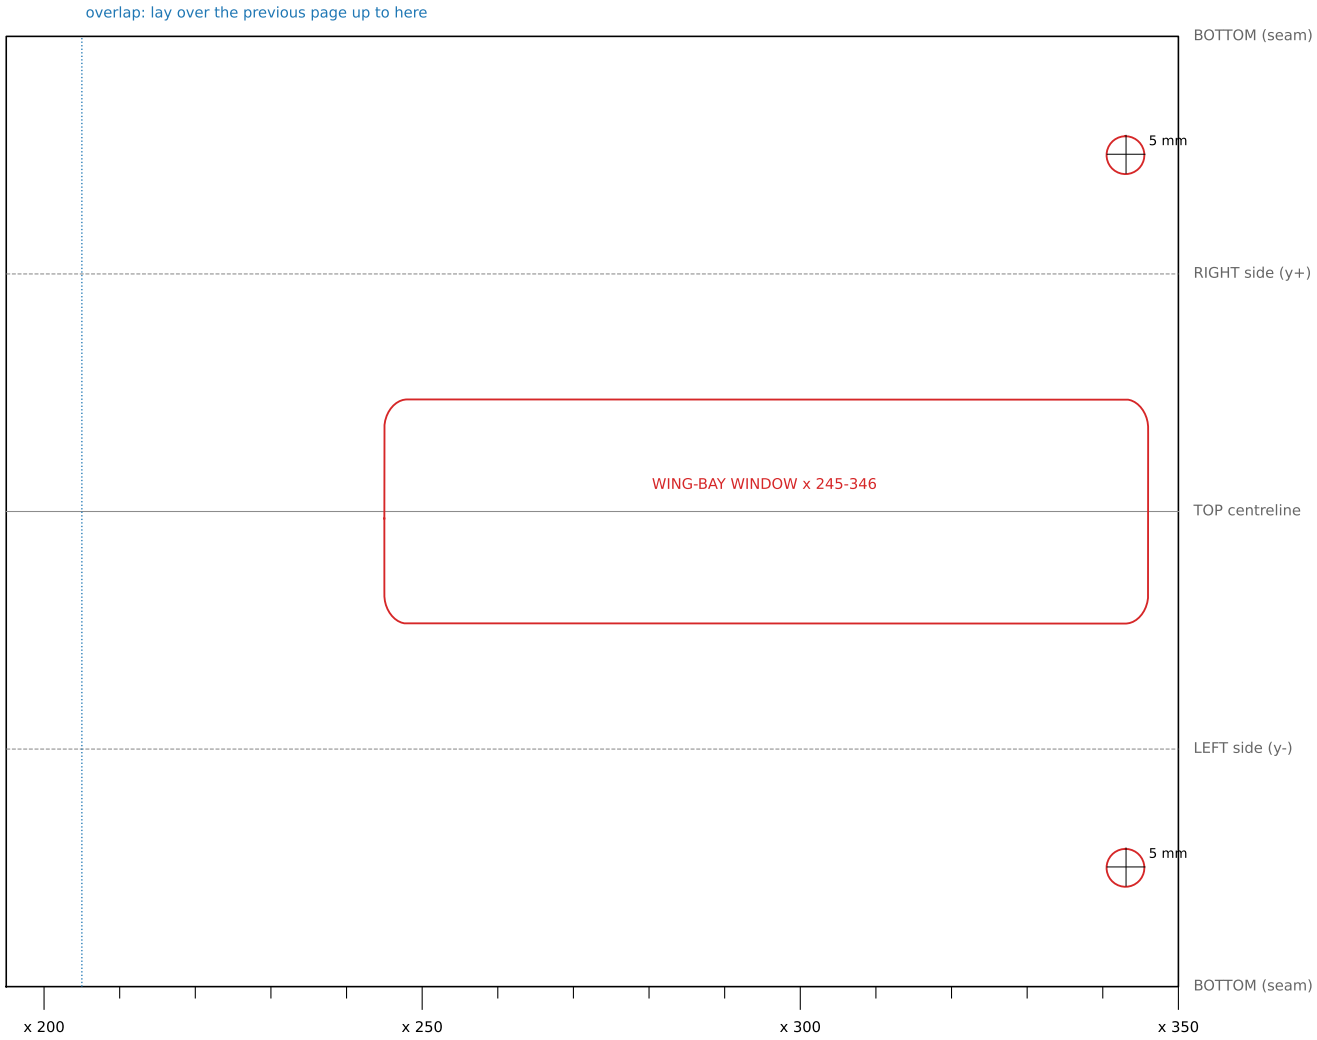

100 mm: measure this before cutting (print at 100 %, no scaling)

SkyG Speed 90B · revision C6B-13 · 2026-10-11 - carbon tube 40 x 38 mm, x 50-370 (320 mm) - cutting template page 3/3

Red: cut out (windows) or drill 5 mm (crosses; a printed countersunk washer goes in each). Wrap the strip round the tube, ends flush, the TOP line along the top; tape it. Cut inside the red line with a diamond disc, file to the line, round the corners (r 3).

Carbon dust: FFP3 mask, vacuum at the disc or cut wet, eye protection. Seal every cut edge and hole with thin CA (carbon conducts: no bare edge may touch a wire).

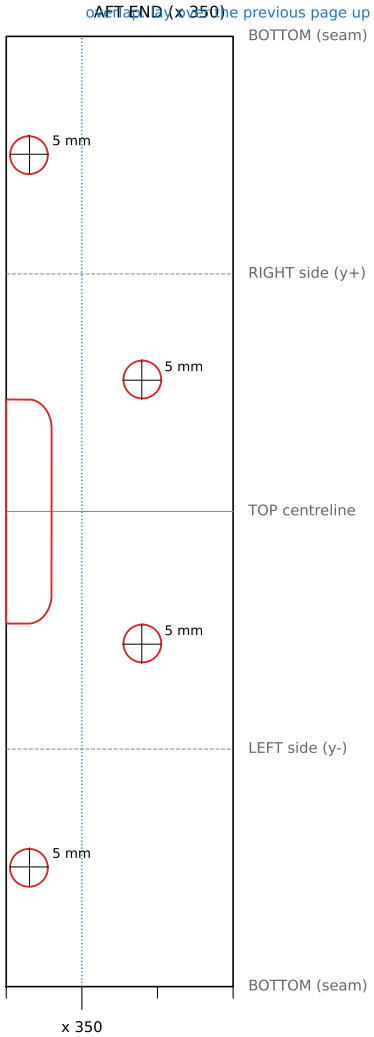

100 mm: measure this before cutting (print at 100 %, no scaling)