Barro Industries

BARRO KITCHENS™

2026 EDITION



PRODUCT CATALOGUE

Stainless-steel kitchen equipment, made to order.

Preparation · Washing · Cooking · Ventilation · Storage · Refrigeration, and the exhaust, gas and fire suppression systems that go with them.

© 2026 Barro Industries OPC · barroindustries.com

WELCOME

Equipment built to your specifications

Premium stainless-steel equipment in food-grade SS304 as standard, or laboratory-grade SS316, built to your specifications. Default sizes are in millimetres. Ask us for a quotation on any item.

23 years in business	**SS304 / SS316** High-quality, food-grade and laboratory-grade	**Made to order** Built to your exact dimensions	**End-to-end** Design · fabricate · deliver · install

CONTENTS

01 Materials and finishes 3

02 Configurable products 4–15

- Preparation table 5
- Sink 6
- Dish table 7
- Stove 8
- Wok range 9
- Griddle, griller or fryer 10
- Gas deck oven 11
- Range hood 12
- Cabinet 13
- Wall shelving 14
- Rack 15

03 Fixed equipment 16–17

- Cooking 16
- Refrigeration 17

04 Kitchen systems 18–20

- Exhaust and fresh-air systems 18
- LPG gas line installation 19
- Kitchen fire suppression 20

05 How we work, warranty 21

06 How to order 22

07 Contact 23

HOW TO READ THIS CATALOGUE

Configurable products

Eleven products you set up yourself: choose the options, then your own size.

Fixed equipment

Standard items with their sizes, notes and specifications.

Kitchen systems

Exhaust and fresh air, LPG gas line and fire suppression, planned together with your cooking line.

Ask us for a quotation on any item. Choose your equipment online and you will see an estimated range for your selection, then we send you the final quotation.

© 2026 Barro Industries OPC · barroindustries.com

01 · MATERIALS AND FINISHES

Two grades, three finishes

We work in two grades, food-grade SS304 as standard and laboratory-grade SS316 on request, in a brushed, mirror or satin finish. Seams are welded and ground smooth, and surfaces are polished to a professional finish.

STANDARD

SS304 food grade

Food-grade SS304 stainless steel is our standard for kitchens: preparation tables, sinks, cabinets, shelving and racks.

ON REQUEST

SS316 laboratory grade

Laboratory-grade SS316 stainless steel is available on request and suits laboratories and school science rooms.

Brushed

A visible straight grain, the usual choice for work surfaces.

Mirror

Polished to a high gloss, for decorative parts and low-contact areas.

Satin

A soft, low-sheen finish between brushed and mirror.

The swatches are illustrations. Ask to see a sample before you decide.

Every configurable product is built to order in SS304 or SS316, in a brushed, mirror or satin finish. Made-to-order tables, sinks and stoves have a 1.5 mm (16 gauge) top plate; bodies and shelving are 1.2 mm; floor-standing pieces stand on square-tube posts with adjustable bullet feet.



ISPSC 2026: stainless-steel work tables with the protective film still on

02 · CONFIGURABLE PRODUCTS

Eleven products, set up online

Choose the options, then your own size. Each product has a page of its own in this catalogue, with its options, its size limits and its layouts at a glance.

THE ELEVEN CONFIGURABLE PRODUCTS AT A GLANCE

PRODUCT	YOU CHOOSE	ONLINE SIZE RANGE (MM)
Preparation table	layers, upper shelves	Length 500–6000 · Width 400–1200 · Height 600–1100
Sink	sinks, sink position, undershelf, upper shelf, faucet	Length 500–3500 · Width 400–900 · Height 700–1000
Dish table	side, dishwasher on the, pre-rinse sink, undershelf	Length 600–3000 · Width 600–900
Stove	burner positions, add-ons	Length 400–3000 · Width 500–1000 · Height 400–1000
Wok range	wok holes, rear stock burner, water faucet	Length 600–2400 · Width 650–1000
Griddle, griller or fryer	type, burners, fry baskets, base	Length 500–2000 · Width 600–900
Gas deck oven	decks, trays per deck, stand	Width 700 mm with three trays per deck, 1200 mm with six
Range hood	type, grease filters, lighting	Length 600–6000 · Depth 300–1500
Cabinet	type, doors, shelves inside	Length 400–4000 · Width 300–1000 · Height 300–2200
Wall shelving	tiers, surface	Length 300–3500 · Depth 250–600
Rack	tiers, wheels	Length 400–2000 · Width 400–1000 · Height 800–2100

Every configurable product is built to order in SS304 or SS316, in a brushed, mirror or satin finish. Need a different size? Ask us for a quotation built to your specifications.



DMMMSU: finished commercial kitchen with range, hood and work tables

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · PREPARATION

Preparation table

Stainless steel worktable. Choose one to three layers and up to two upper shelves, then set your own size.



Representative image



LAYERS
1 / 2 / 3

UPPER SHELVES
None / 1 / 2

SIZE
Made to your length, width and height

Length 500–6000 · Width 400–1200 · Height 600–1100 mm. Default 900 × 600 × 850 mm.


CONSTRUCTION
SS304 stainless steel · 1.5 mm (16 ga) top plate · 1.2 mm undershelves and upper shelves · square-tube posts with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE



1 layer · no upper shelves

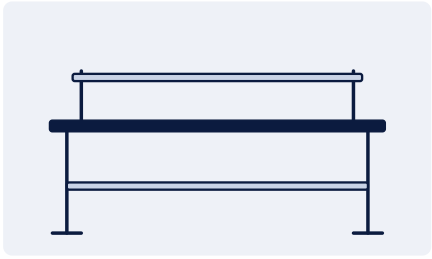

2 layers · 1 upper shelf

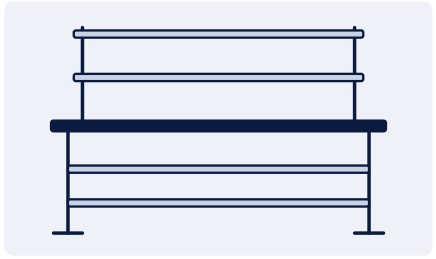

3 layers · 2 upper shelves

SEEN IN OUR PROJECTS



ISPSC 2026: rows of stainless-steel work tables, wide view

Set up your preparation table online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · WASHING

Sink

Stainless steel sink table. Choose one to four sinks, their position, the shelves and the faucet, then set your own size.



Representative image





SINKS
1 / 2 / 3 / 4

SINK POSITION
Centre / Left / Right

UNDERSHELF
With / Without

UPPER SHELF
With / Without

FAUCET
Gooseneck / Pre-rinse spray


SIZE
Made to your length, width and height

Length 500–3500 · Width 400–900 · Height 700–1000 mm. Default 500 × 500 × 850 mm.


CONSTRUCTION
SS304 stainless steel · 1.5 mm (16 ga) top plate · 1.2 mm undershelf, upper shelf and panels · square-tube posts with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

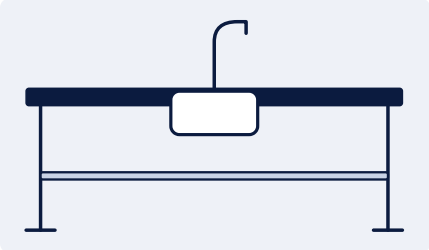

1 sink · centred · with undershelf · without upper shelf · gooseneck faucet

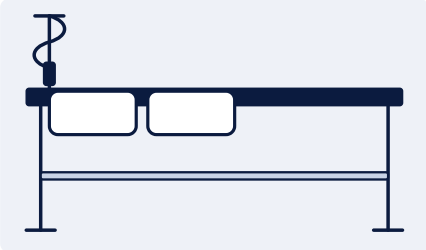


2 sinks · left-aligned · with undershelf · without upper shelf · pre-rinse faucet

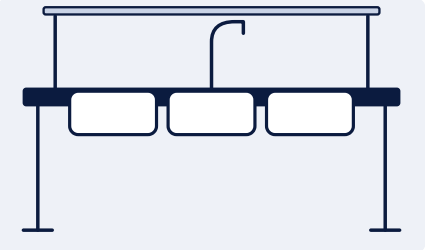

3 sinks · centred · without undershelf · with upper shelf · gooseneck faucet

SEEN IN OUR PROJECTS

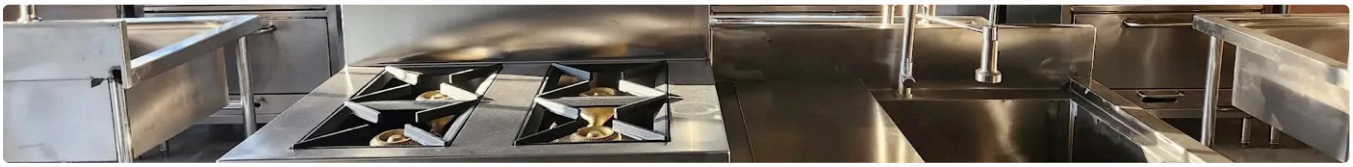

ISPSC 2026: cooking station with range oven and sink


Set up your sink online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · WASHING

Dish table

Stainless steel dish table for the dishwasher. Choose the clean or the soiled side, which hand it sits on, a pre-rinse sink and an undershelf, then set your own size.

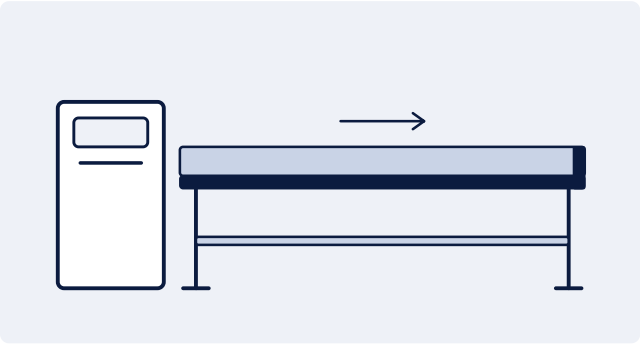

Illustration

SIDE
Clean / Soiled

DISHWASHER ON THE
Left / Right

PRE-RINSE SINK
None / With pre-rinse sink and spray faucet (Side is Soiled)

UNDERSHELF
With / Without


SIZE
Made to your length and width

Length 600–3000 · Width 600–900 mm. Default 1200 × 660 mm.


CONSTRUCTION
SS304 stainless steel · 1.5 mm (16 ga) top plate · 1.2 mm undershelf and splash · raised back and side splash, clean-dish landing · square-tube posts with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

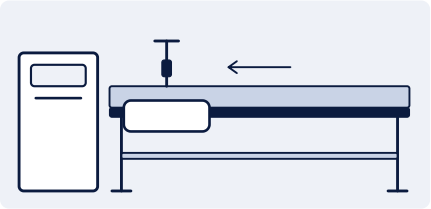

soiled side · dishwasher on the left · pre-rinse sink · with undershelf

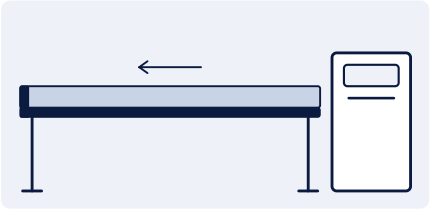

clean side · dishwasher on the right · without undershelf

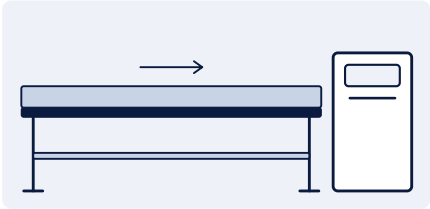

soiled side · dishwasher on the right · no sink · with undershelf

TABLES IN OUR PROJECTS



ISPSC 2026: rows of stainless-steel work tables, wide view

Set up your dish table online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · COOKING

Stove

Gas range built to your layout. Choose each burner position one by one, add a griller, griddle, oven or fryer, then set your own size.



Representative image





BURNER POSITIONS
Up to 6 burners, each chosen one by one

BURNER TYPES
Wok · HP small · HP large · LP small · LP large · Soup

ADD-ONS
Griller / Griddle / Oven / Fryer

SIZE
Made to your length, width and height

Length 400–3000 · Width 500–1000 · Height 400–1000 mm. Default 600 × 700 × 850 mm.


CONSTRUCTION
SS304 stainless steel · 1.5 mm (16 ga) top plate · 1.2 mm body and panels · square-tube posts with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE



2 burners (LP small, LP small) · no add-ons

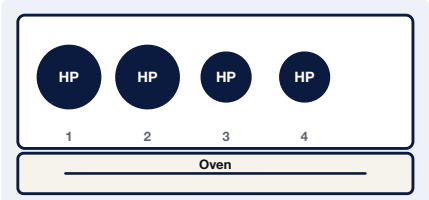

4 burners (HP large, HP large, HP small, HP small) · with oven

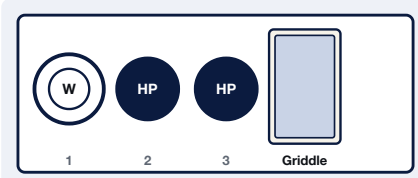

3 burners (wok, HP large, HP large) · with griddle

SEEN IN OUR PROJECTS



ISPSC 2026: wide view of the cooking stations with range ovens, sinks and overhead hoods


Set up your stove online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · COOKING

Wok range

Gas wok range with high-pressure burners. Choose one to three wok holes, a rear stock burner and a swan-neck water faucet, then set your own size.

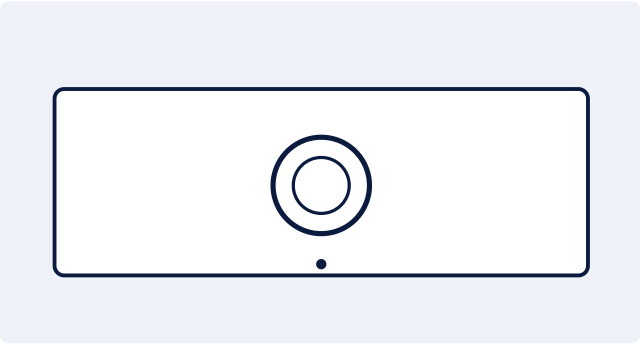

Illustration

WOK HOLES
1 / 2 / 3

REAR STOCK BURNER
None / With


WATER FAUCET
None / Swan-neck faucet

SIZE
Made to your length and width
Length 600–2400 · Width 650–1000 mm. Default 600 × 700 mm.


CONSTRUCTION
SS304 stainless steel · 1.5 mm (16 ga) top plate · 1.2 mm body and panels · recessed wok rings with high-pressure burners · square-tube posts with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

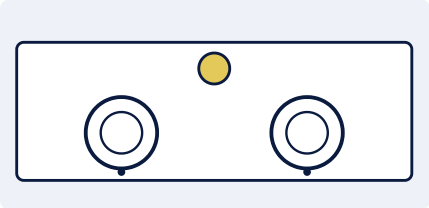

2 wok holes · with rear stock burner · no faucet

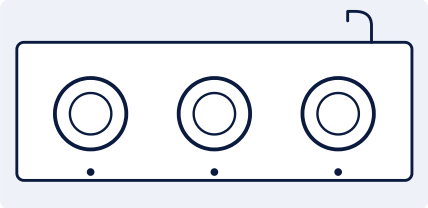

3 wok holes · no rear burner · swan-neck faucet

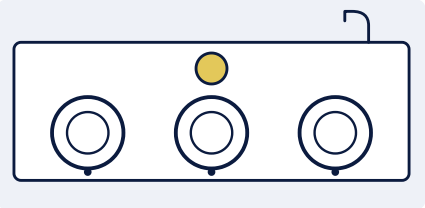

3 wok holes · with rear stock burner · swan-neck faucet

GAS COOKING LINES IN OUR PROJECTS



ISPSC 2026: cooking station with range oven and sink

Set up your wok range online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · COOKING

Griddle, griller or fryer

Gas griddle, lava-rock griller, fryer or a griller-and-griddle combination on its own stand. Choose the type, the burners or baskets and the base, then set your own size.



Representative image





TYPE
Griddle / Lava-rock griller / Fryer / Griller + griddle

BURNERS
1 / 2 / 3 (Type is Griddle or Lava-rock griller)

FRY BASKETS
1 / 2 / 3 (Type is Fryer)

BASE
Open stand / Stand with bottom shelf


SIZE
Made to your length and width

Length 500–2000 · Width 600–900 mm. Default 700 × 700 mm.


CONSTRUCTION
SS304 stainless steel · 1.2 mm body and panels · semi-non-stick griddle plate, gas-fired · square-tube stand with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

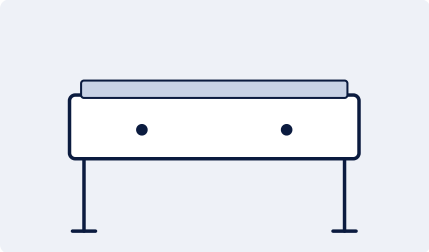

griddle · 2 burners · open stand

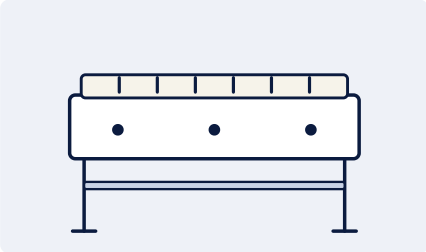

lava-rock griller · 3 burners · with bottom shelf

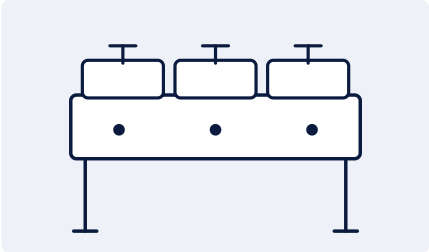

fryer · 3 baskets · open stand

SEEN IN OUR PROJECTS




DMMMSU: finished commercial kitchen with range, hood and work tables

Set up your griddle, griller or fryer online and add it to your quote request. barroindustries.com/catalogue/

CONFIGURABLE PRODUCT · COOKING

Gas deck oven

Gas-fired deck oven. Choose one to three decks, three or six trays per deck and a heavy-duty stand.

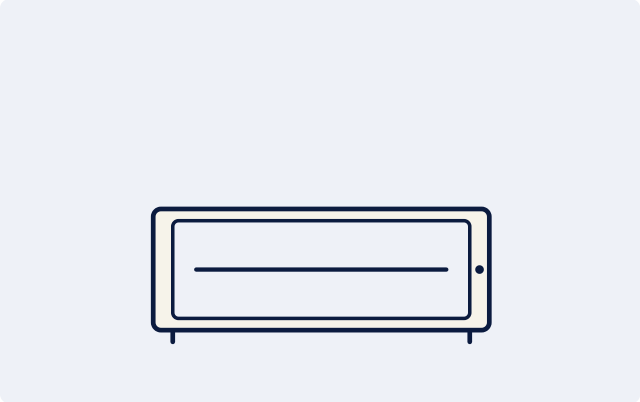

Illustration

DECKS
1 / 2 / 3

TRAYS PER DECK
3 / 6


STAND
None / Heavy-duty stand

SIZE
Made to your width
Width 700 mm with three trays per deck, 1200 mm with six.


CONSTRUCTION
Insulated double-wall decks with a gas burner, gas valve and thermometer per deck · stainless steel outer body · set on your own base

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish

LAYOUTS AT A GLANCE

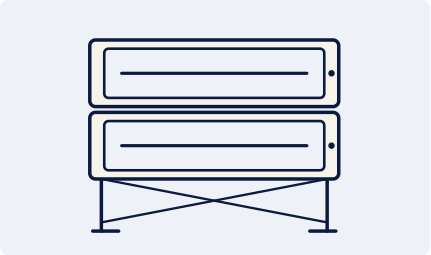

2 decks · 3 trays per deck · with heavy-duty stand

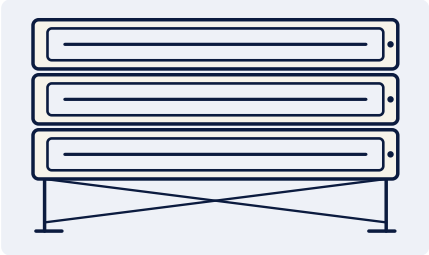

3 decks · 6 trays per deck · with heavy-duty stand



2 decks · 6 trays per deck · no stand

RANGE OVENS IN OUR PROJECTS



DMMMSU: finished commercial kitchen with range, hood and work tables

Set up your gas deck oven online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · VENTILATION

Range hood

Stainless steel kitchen exhaust hood. Choose a wall, island or slim canopy, baffle grease filters and lighting, then set your own length and depth.



Representative image

TYPE
Wall canopy / Island canopy / Slim, low profile

GREASE FILTERS
Baffle filters / None (open canopy)

LIGHTING
With lamp and switch / Without


SIZE
Made to your length and depth

Length 600–6000 · Depth 300–1500 mm. Default 1000 × 900 mm.


CONSTRUCTION
SS304 stainless steel · welded canopy with grease trough and oil cup · wall-mounted canopy · stainless baffle grease filters

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

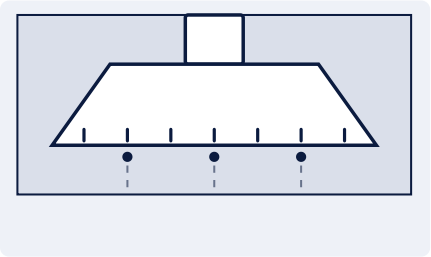

wall canopy · baffle filters · with lighting

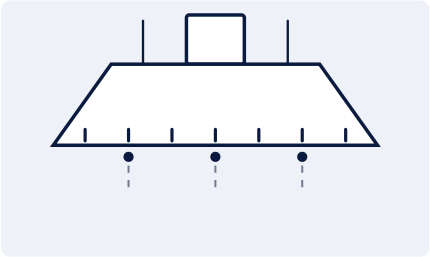

island canopy · baffle filters · with lighting

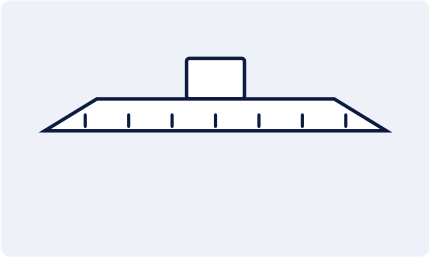

slim low-profile canopy · baffle filters · without lighting

SEEN IN OUR PROJECTS



ISPSC 2026: wide view of the cooking stations with range ovens, sinks and overhead hoods


Set up your range hood online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · STORAGE

Cabinet

Stainless steel storage cabinet, floor-standing or wall-hung. Choose the doors and the shelves inside, then set your own size.



Illustration

TYPE
Floor-standing / Wall-hung

DOORS
Swing / Sliding


SHELVES INSIDE
1 / 2 / 3

SIZE
Made to your length, width and height
Length 400–4000 · Width 300–1000 · Height 300–2200 mm. Default 600 × 500 × 1800 mm.


CONSTRUCTION
SS304 stainless steel · 1.2 mm body, doors and shelves · square-tube posts with adjustable bullet feet

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE



floor-standing · sliding doors · 2 shelves



wall-hung · swing doors · 1 shelf



wall-hung · sliding doors · 2 shelves

SEEN IN OUR PROJECTS



DMMMSU: room installed with stainless-steel tables, racks and shelving

Set up your cabinet online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · STORAGE

Wall shelving

Stainless steel shelving fixed to the wall. Choose one to three tiers and a solid or slotted surface, then set your own size.



Representative image

TIERS
1 / 2 / 3


SURFACE
Solid / Slotted

SIZE
Made to your length and depth
Length 300–3500 · Depth 250–600 mm. Default 1200 × 450 mm.


CONSTRUCTION
SS304 stainless steel · 1.2 mm shelves · fixed to the wall

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

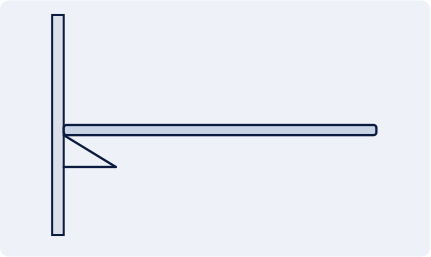

1 tier · solid surface

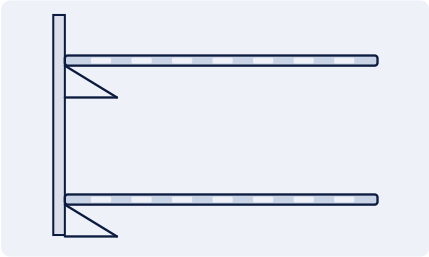

2 tiers · slotted surface

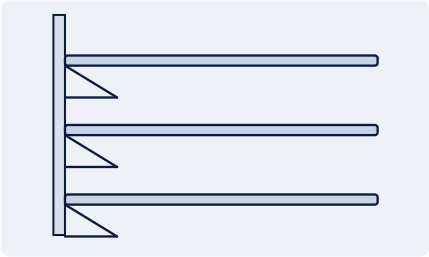

3 tiers · solid surface

SEEN IN OUR PROJECTS



DMMMSU: stainless-steel shelving and work tables after installation

Set up your wall shelving online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

CONFIGURABLE PRODUCT · STORAGE

Rack

Stainless steel dish and storage rack. Choose three to six tiers, with or without wheels, then set your own size.



Representative image

TIERS
3 / 4 / 5 / 6

WHEELS
With / Without


SIZE
Made to your length, width and height

Length 400–2000 · Width 400–1000 · Height 800–2100 mm. Default 600 × 500 × 1600 mm.


CONSTRUCTION
SS304 stainless steel · 1.2 mm shelves · square-tube frame · on wheels

MATERIAL
SS304 food-grade (standard) or SS316 laboratory-grade · brushed, mirror or satin finish


LAYOUTS AT A GLANCE

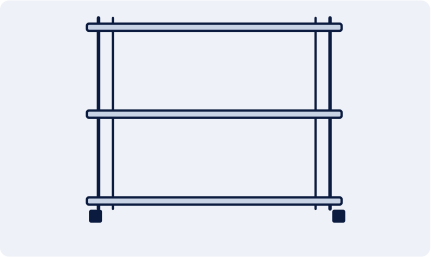

3 tiers · without wheels

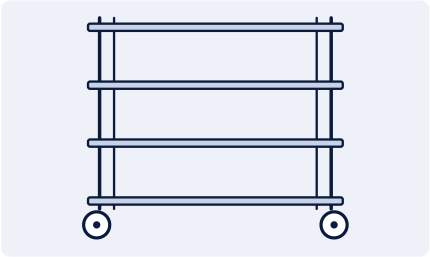

4 tiers · on wheels

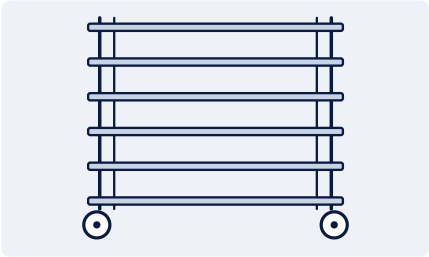

6 tiers · on wheels

SEEN IN OUR PROJECTS



DMMMSU: stainless-steel tables and racks installed in the room

Set up your rack online and add it to your quote request. barroindustries.com/catalogue/

© 2026 Barro Industries OPC · barroindustries.com

FIXED EQUIPMENT · COOKING

Cooking equipment

Standard items for the cooking line, the bakery and the preparation kitchen, with their sizes, notes and specifications. Ask us for a quotation on any item.



CE-011

SS Commercial Gas Rice Steamer (6-Tray)

700 × 700 × 1200 mm · per pc

NOTES

Gas type, 6-tray capacity

CE-024

SS Display Warmer (3 Shelves)

610 × 406 × 1219 mm · per pc

NOTES

3-shelf display warmer, optional horizontal layout

CE-030

Salamander Oven (Broiler)

per pc

CE-031

SS Spoon & Fork Electric Heater (4 Holes)

per pc

NOTES

Electric, 4-hole holder/heater

BA-006

SS Dough Proofing Cabinet (16-Tray, Insulated)

700 × 800 × 1850 mm · per pc

NOTES

Insulated SS304 proofer. Double-wall body, magnetic gasket door, thermostat + humidity tray, electric heating element. 600x400 tray pitch.

SPECIFICATIONS

Grade SS304 · Body gauge 0.9mm · Finish No.4 brushed · Panel double-wall insulated · Controls humidity + thermostat

BA-011

SS Proofer-Retarder Cabinet (Twin-Door)

1400 × 800 × 1950 mm · per pc

NOTES

Insulated SS304 proofer-retarder. Digital controls for retard then proof, twin doors, 2x 16-tray capacity. Refrigeration unit supplied by partner.

SPECIFICATIONS

Grade SS304 · Body gauge 0.9mm · Finish No.4 brushed · Panel double-wall insulated · Controls digital temp + humidity, retard cycle

MS-015

Industrial Meat Grinder

1168 × 610 × 1143 mm · per pc

NOTES

SS worm/blade 420#CPM3V, 900W/1.2HP, 220kg/hr capacity, 110-240V, 36kg unit weight, CE approved

MS-016

Industrial Meat Slicer

1194 × 889 × 1092 mm · per pc

NOTES

850W, 150kg/hr, SS, 3mm slicing thickness, 29kg

Images are representative. Notes and specifications are shown in full; ask us for a quotation on any item.

© 2026 Barro Industries OPC · barroindustries.com

FIXED EQUIPMENT · REFRIGERATION

Refrigeration

Standard refrigeration equipment with its sizes, notes and specifications. Specifications are confirmed with you for each project.

RF-001

Pasteuriser

per pc

NOTES

304 food-grade SS double-layer water jacket; capacity 10L; temperature range 60–95°C

RF-002

Chiller (Single Door Display)

per pc

NOTES

Full glass display, double-layer glass door, 420L capacity, fan-assisted ventilation



RF-003

Undercounter Freezer

1200 × 600 × 810 mm · per pc

NOTES

Fan cooling, Embraco/R404A compressor, −12°C to −18°C, SS body, digital LED controller, 100% copper condenser/evaporator, 220V/60Hz



RF-004

Undercounter Chiller

per pc

NOTES

Pending full spec confirmation per project

RF-005

Cake Chiller

per pc

NOTES

Pending full spec confirmation per project

RF-006

Underbar Chiller

1500 × 700 × 800 mm · per pc

Refrigeration capacities and layouts are confirmed with you for each project. Images are representative.



DMMMSU: finished commercial kitchen with range, hood and work tables

© 2026 Barro Industries OPC · barroindustries.com

KITCHEN SYSTEMS · 01

Exhaust and fresh-air systems

A well-ventilated kitchen is essential for both safety and comfort. We design, fabricate and install exhaust hoods, ducting and fresh-air systems that remove smoke, grease and heat while keeping the air in your kitchen moving.

TWO PATHS, ONE BALANCED KITCHEN

A commercial kitchen ventilation system has two paths. A heavy-duty exhaust line removes heat, smoke and grease from over the cooking line. A fresh-air supply line replaces the air being pulled out, so the kitchen does not turn into a vacuum and the air circulates across its different zones through room diffusers.

Because the two paths depend on each other, we plan the exhaust and the fresh-air supply as one system, together with your cooking line, gas line and fire suppression.

WHAT'S INCLUDED

- **Stainless-steel range hoods.** SS304 hoods over your cooking line, fitted with filters, lighting and integrated switch controls.
- **Exhaust ducting and blower.** Fully welded rectangular exhaust ducting powered by a centrifugal blower, with foil insulation and an access door for maintenance.
- **Fresh-air ducting and blower.** Fresh-air ducting with its own blower, integrated into the hood and distributed through room diffusers.
- **Room diffusers.** Square louvered diffusers that spread the fresh air across the zones of your kitchen.
- **Site assessment and layout.** We assess your site, customise the system to suit your kitchen and prepare drawings.
- **Installation and commissioning.** We deliver, install and commission the system on site.



Hoods with their ducting (representative image)

THE MAIN COMPONENTS




Stainless-steel range hood



Ducting sections with elbows



In-line ceiling exhaust fan for rectangular duct



Square louvered diffuser

A STANDARD EXAMPLE

A dual-path ventilation system

One standard example from our 2026 kitchen catalogue. Every system is custom-fabricated to meet the requirements of your site.

HOOD

A 4-metre SS304 stainless-steel range hood with filters, lighting and integrated switch controls.

EXHAUST

A 10-metre rectangular duct of fully welded BI sheet, powered by a 3HP centrifugal blower, with foil insulation and an access door for maintenance.

FRESH AIR

A 15-metre GI (galvanised iron) duct system with a 3HP blower, integrated into the hood and distributed through about 8 room diffusers.

These dimensions and specifications are standard examples and are not exhaustive. All equipment can be custom-fabricated to meet your specific site requirements. Images are representative.

© 2026 Barro Industries OPC · barroindustries.com

KITCHEN SYSTEMS · 02

LPG gas line installation

A centralised and safe supply of fuel to your cooking equipment. We design, fabricate and install a fully welded gas line that runs from an external gas tank farm to the appliances on your cooking line, with safety controls built in.

WHAT'S INCLUDED

- **Gas tank farm.** A secured cage in an external storage area, designed to hold your gas tanks.
- **Piping network.** Fully welded black iron (BI) pipes and fittings that carry the fuel into the kitchen and to your appliances.
- **Safety controls.** A gas leak detection system paired with an emergency auto-shutoff valve.
- **Appliance connections.** We connect your cooking equipment, such as stoves, to the gas line.
- **Testing.** We test the installation to make sure there are no leaks.
- **Planned with your kitchen.** The gas line is laid out with your cooking line and your exhaust system as part of one kitchen layout.



Gas tank farm (representative image)



Safety controls: a gas shut-off valve



Safety controls: an automatic valve

A STANDARD EXAMPLE

A centralised gas line system

One standard example from our 2026 kitchen catalogue: a centralised and safe distribution of fuel to your high-pressure cooking equipment, moving from an external storage area to an internal network with built-in safety monitoring.

GAS TANK FARM

A secured cage designed to hold four 50 kg gas tanks.

PIPING NETWORK

Fully welded BI pipes and fittings for fuel transport.

SAFETY CONTROLS

A gas leak detection system paired with an emergency auto-shutoff valve.



A gas range and sink at ISPSC (March 2026).

These dimensions and specifications are standard examples and are not exhaustive. All equipment can be custom-fabricated to meet your specific site requirements. Images are representative.

KITCHEN SYSTEMS · 03

Kitchen fire suppression

A wet chemical fire suppression system integrated with your range hood, designed to protect the cooking surface and the exhaust path. We supply, install and integrate it into your kitchen as part of the project.

WHAT A SYSTEM INCLUDES

- **Wet chemical tank.** The tank that stores the extinguishing agent for kitchen fires.
- **Hood integration.** Specialised hardware links the suppression discharge to the stainless-steel range hood.
- **Detectors.** Detectors that allow the system to operate automatically.
- **Suppression line and cylinder.** A suppression line and a suppression cylinder complete the layout.
- **Manual pull.** A manual pull for operating the system by hand.
- **Installation and integration.** We install the system and integrate it with your hood and the kitchen's ventilation.



Diagram of possible system components: duct, detector, detector line, suppression line, cylinder and manual pull (representative).

A STANDARD EXAMPLE

A wet chemical suppression system

One standard example from our 2026 kitchen catalogue: a specialised system integrated directly into the kitchen's ventilation to deal with grease fires and high-temperature hazards.

SYSTEM

A wet chemical suppression system integrated with the range hood, to provide automatic fire extinguishing. It is designed to protect the cooking surface and the exhaust path.

AGENT

A 16 L wet chemical tank, the primary storage for the extinguishing agent.

HOOD INTEGRATION

Specialised hardware linking the suppression discharge to the SS range hood.

COMPONENTS

Detectors, a suppression line, a manual pull and a suppression cylinder.



Overhead hoods above the cooking stations at ISPSC (March 2026).

These dimensions and specifications are standard examples and are not exhaustive. All equipment can be custom-fabricated to meet your specific site requirements. Images are representative.

© 2026 Barro Industries OPC · barroindustries.com

05 · HOW WE WORK

How we work, and what follows

One team carries your project from the first consultation through to after-sales support.

1. **Consultation & site visit**
   We listen to your requirements and visit your site to take measurements.
2. **Design & layout**
   We plan the layout and prepare drawings for your kitchen.
3. **Fabrication**
   Built to order in SS304 or SS316, finished brushed, mirror or satin, with seams welded and ground smooth.
4. **Delivery**
   Your finished equipment is delivered to your site.
5. **Installation & commissioning**
   We install everything on site and commission it for use.
6. **After-sales support**
   Service and support continue after handover.



A sink station with an overhead shelf, installed at ISPSC.

WARRANTY AND AFTER-SALES

6 MONTHS

Service warranty

A 6-month service warranty on our equipment and work.

12 MONTHS

Preventive maintenance

Full-kitchen projects include 12 months of preventive maintenance service (PMS) with KitchenShield™.

PhilGEPS-registered · SEC-registered · VAT-registered

We supply and install through public bidding, and government purchases follow procurement rules.



DMMMSU: installed stainless-steel tables and racks, wide view

06 · HOW TO ORDER

How to order

Choose your equipment and we will send you a final quotation. No account is needed.

01

Online quote request

Choose your equipment and sizes, and see an estimated range for your selection. We then review your request and send you the final quotation.

barroindustries.com/catalogue/

02

Project brief

For a larger project (a hospital, school, hotel or commissary), send us a full project brief. It helps us plan your layout, equipment, exhaust and utilities before our site visit.

Open the project brief

03

Message us

Ask a question on Messenger, or call or email us, and we will come back with a quotation.

m.me/barrokitchens
0927 683 6300
hello@barroindustries.com

WHAT HAPPENS NEXT

1. **You tell us what you need**
   Your equipment, your sizes, your options.
2. **We review and quote**
   We review your request and send you the final quotation.
3. **We build, deliver and install**
   Built to order, delivered to your site, installed and commissioned for use.

Scan to start your quote request

> The online estimate is a range for your selection. The final quotation comes from us after we review your request.



ISPSC 2026: rows of stainless-steel work tables, wide view

© 2026 Barro Industries OPC · barroindustries.com

CONTACT

Let's plan your kitchen.

Tell us about your kitchen and we will come back with a quotation. No account needed.

ADDRESS
21 Capricorn St., Tandang Sora, Quezon City, 1116 Metro Manila, Philippines

PHONE
0927 683 6300

EMAIL
hello@barroindustries.com

WEBSITE
barroindustries.com

MESSAGE US ON MESSENGER
m.me/barrokitchens

FACEBOOK
facebook.com/barrokitchens

Scan to visit
barroindustries.com

01

Get a quote online

Choose your equipment and sizes and see an estimated range for your selection. No account needed.
barroindustries.com/catalogue/

02

Send a project brief

For a larger project (a hospital, school, hotel or commissary), tell us about it before our site visit.
Project brief

03

Message us

Ask a question on Messenger, or call or email us. We will come back with a quotation.
m.me/barrokitchens



PhilGEPS-registered · SEC-registered · VAT-registered

© 2026 Barro Industries OPC. Barro Kitchens is a brand of Barro Industries OPC. 21 Capricorn St., Tandang Sora, Quezon City, 1116 Metro Manila, Philippines
All photos, designs and content are our own work and may not be copied or reused without written permission.

Building the Future, Brick by Brick.