
CAST IRON DOUBLE AIR VALVE



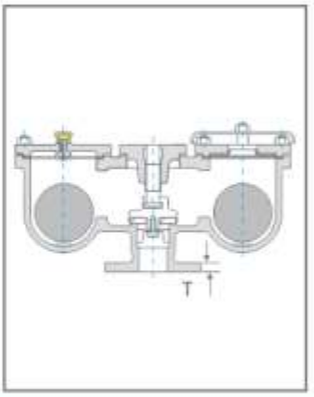

Sizes		Dimensions		
mm	Inch.	A	B	T
40	1½"	442	210	16
50	2"	442	210	16
80	3"	504	236	21
100	4"	634	280	22
150	6"	862	430	24
200	8"	988	506	24.5

Parts Name	Material	Specifications
Body	Cast Iron	IS 210 FG 200
Cover	Cast Iron	IS 210 FG 200
Cowl	Cast Iron	IS 210 FG 200
Floats	Timber Core with Rubber Coating	--
Small Orifice	Cast Steel Rubber Coated	IS 7604 & IS 938 Type B
Large Orifice	Cast Iron Rubber Coated	IS 210 FG 200 & IS 938 Type B
Bolts & Nuts	Carbon Steel	IS 1363


Flanged Ends as per IS:1538

- ☑ water
- ☑ air
- ☐ steam
- ☐ oil
- ☐ gases

Test Pressure (Hydrostatic)
Seat : 16 Kg/cm²

CAST IRON SINGLE AIR VALVE (Screwed)



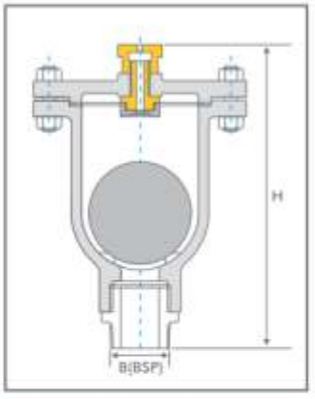

Sizes		Dimensions	
mm	Inch.	L	B(BSP)
15	1/2"	196	1/2"
20	3/4"	196	3/4"
25	1"	255	1"
32	1¼"	290	1¼"
40	1½"	290	1½"
50	2"	310	2"

Parts Name	Material	Specifications
Body	Cast Iron	IS 210 FG 200
Cover	Cast Iron	IS 210 FG 200
Cowl	Cast Iron	IS 210 FG 200
Floats	Timber Core with Rubber Coating	--
Small Orifice	Stainless Steel Rubber Coated	IS 7604
Bolts & Nuts	Carbon Steel	IS 1363
Hex. Nipple	Carbon Steel	IS 1367

- ☑ water
- ☑ air
- ☐ steam
- ☐ oil
- ☐ gases

Test Pressure (Hydrostatic)
Seat : 16Kg/cm²