



# PM106-115-4BT-2 PM106-230-4BT-2

#### **Features**

Size: 120 x 120 x 38 mm (4.7" x 4.7" x 1.5")

Airflow: 106 CFM

Weight: 550 grams (20 oz)

Terminal: 0.120 inches

Impeller: Reinforced Plastic (UL94V-0)

Frame: Aluminum Alloy

Bearings: Sealed Ball




**UL** E101153




CSA LR74525

1

## **Dimensions - inches mm**

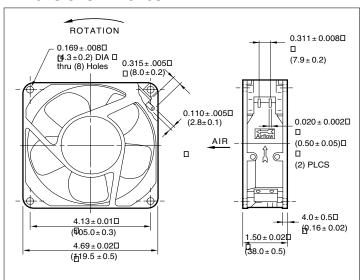

## Air Flow vs Air Pressure



#### **Performance**

Туре	Rated Voltage (V)	Operating Frequency (Hz)	Input Power (W) (@ 60 Hz)	Max Air Flow (CFM)	Max Air Pressure (In H <sub>2</sub> O)	Noise* (dBA)	Operating Temperature (°C)	Life Expectancy (Hr) (@ 20°C ±15)
PM106-115-4BT-2	115	50/60	13.0	106	0.35	48	-20 ~ +60	60,000
PM106-230-4BT-2	230	50/60	13.0	106	0.35	48	-20~ +60	60,000

<sup>\*</sup>Measured 1 m from intake

Product specifications contained herein may be changed without prior notice.

It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.