

RNP APCH - GPS.


▼

⚠

Rwy 14 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.

MISSED APPROACH: Climb to 4500 direct CIRIX and hold.

AWOS-3 120.0	HOUSTON CENTER 134.2 307.3	UNICOM 122.7 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

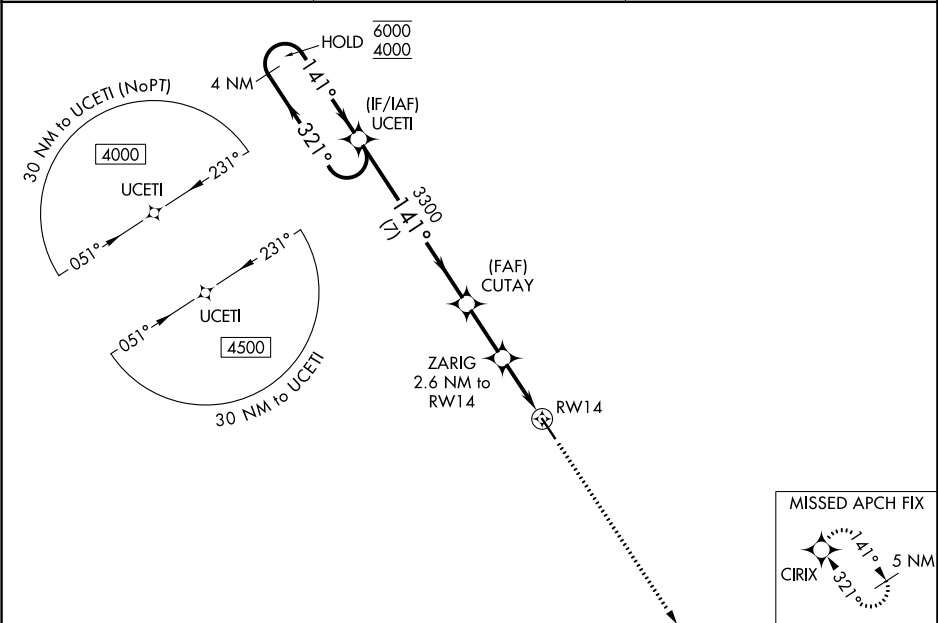

ELEV 1695		TDZE 1695		
4 NM Holding Pattern UCETI 6000 ← 321° 4000 → 141° GS 3.00° TCH 43		CUTAY 3300 ZARIG 2.6 NM to RW14 1.5 NM to RW14 RW14 4500 CIRIX		
7 NM		2.3 NM		
1.1 NM		1.5 NM		
CATEGORY	A	B	C	D
LPV DA	1945-1 250 (300-1)		NA	
LNAV/VNAV DA	2087-1⅛ 392 (400-1⅛)		NA	
LNAV MDA	2200-1 505 (600-1)	2200-1⅜ 505 (600-1⅜)		NA
CIRCLING	2200-1 505 (600-1)	2480-1 785 (800-1)	2520-2½ 825 (900-2½)	NA
MIRL Rwy 14-32 0				