
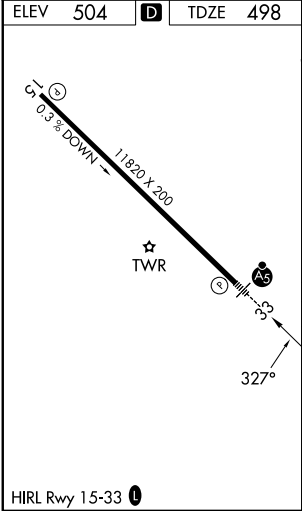


WAAS CH 42906 W33A	APP CRS 327°	Rwy Ldg 11820 TDZE 498 Apt Elev 504
--	------------------------	--

RNAV (GPS) RWY 33

GRIFFISS INTL (RME)

RNP APCH-GPS.				MALSR 	MISSED APPROACH: Climb to 3500 direct TURYN and hold.
⚠ ⚠ Circling NA southwest of Rwy 15-33. Baro-VNAV and VDP NA when using Syracuse altimeter setting. Rwy 33 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. For inop ALS, increase LPV visibility to ¾ SM and LNAV/VNAV visibility to 1 ¾ SM and LNAV Cat A/B visibility to 1 SM. For inop ALS when using Syracuse Intl altimeter setting, increase LNAV Cat A/B visibility to 1 SM. When local altimeter setting not received, use Syracuse Intl altimeter setting: increase LPV DA to 869 feet, increase LNAV/VNAV DA to 1051 feet; increase all MDAs 100 feet and visibility LNAV Cat C/D and Circling Cat B/C visibility ¼ SM.					
ATIS 118.7	SYRACUSE APP CON 127.425 290.45	GRIFFISS TOWER ★ 118.1 (CTAF) 0 291.7	GND CON 121.9	UNICOM 122.95	

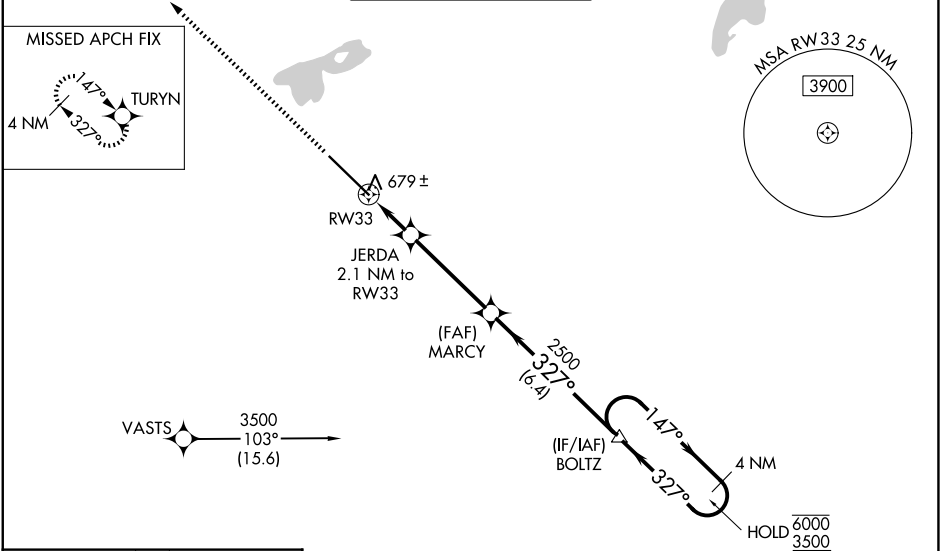

ELEV 504	D	TDZE 498
3500	TURYN	
JERDA	2.1 NM to RWY 33	
MARCY	2500	
BOLTZ	2500	
HOLD	6000/3500	
GP 3.00°	TCH 56	
1.5 NM	0.6	4 NM
6.4 NM		
CATEGORY	A	B
LPV DA	784-¾	286 (300-¾)
LNAV/VNAV DA	966-1¼	468 (500-1¼)
LNAV MDA	1040-¾	542 (600-¾)
CIRCLING	1140-1	1260-1
636 (700-1)	756 (800-1)	1400-2¾
		896 (900-2¾)
		1640-3
		1136 (1200-3)