

APP CRS	Rwy Ldg	9400
246°	TDZE	7680
	Apt Elev	7680

RNAV (RNP) RWY 25
GUNNISON-CRESTED BUTTE RGNL (GUC)

RNP AR APCH - GPS, RF, min RNP 0.10.


Authorization required.

 When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, procedure NA below -30°C or above 43°C. Procedure NA for aircraft with wingspan greater than 136 feet.

MISSED APPROACH: (Do not exceed 250K until HIVOT) Climb to 13000 on track 246° to WITET and on track 246° to ISIDE and on track 246° to COMAM and on track 246° to OSDUE and on track 245° to KEEZR left turn to KETNE left turn on to HIVOT left turn on to FESPA and on track 015° to HBU VOR/DME and hold.

*Missed approach requires minimum climb of 320 feet per NM to 9000 for category B/C aircraft.


AWOS-3PT
135.075

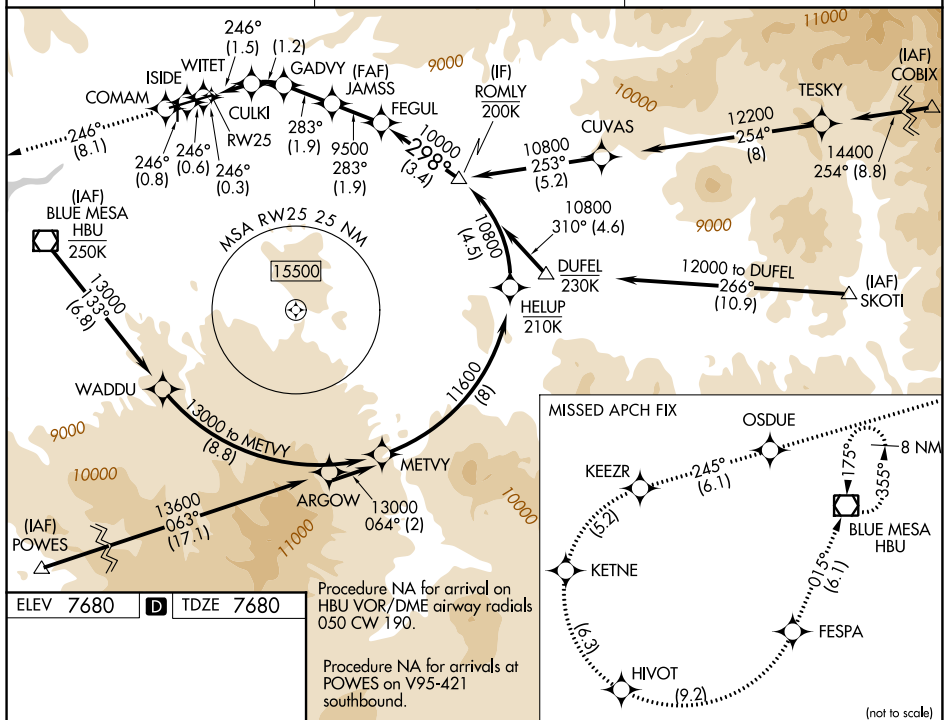DENVER CENTER
124.5 350.25UNICOM
122.7 (CTAF) **L**

ELEV 7680	D	TDZE 7680
-----------	----------	-----------

Procedure NA for arrival on
HBU VOR/DME airway radials
050 CW 190

Procedure NA for arrivals at
POWES on V95-421
southbound.



13000 ↑ tr 246° WITET tr 246° ISIDE tr 246° VGSI and RNAV glidepath not coincident (VGSI Angle 3.60/TCH 71).				
RW25 CULKI 8318 GADVY 8770 JAMSS 9500 FEGUL 10000 ROMLY 10800 246° 283° 298° 1.5 NM 1.2 NM 1.9 NM 1.9 NM 3.4 NM GP 3.60° TCH 65				
CATEGORY	A	B	C	D
RNP 0.10 DA *	NA	8123-13 $\frac{8}{8}$	443 (500-13 $\frac{8}{8}$)	NA

AUTHORIZATION REQUIRED