


Technical Specifications Sheet — SHS: Step Height Standards

Applied NanoStructures' Step Height Standards are uniquely designed for X,Y, and Z calibration of scanning probe microscopes and profilometers. Our Step Height Standard features are defined in thermally grown silicon dioxide on silicon substrate. A layer of Cr is deposited to harden the surface. Our step height standards are available in two heights.

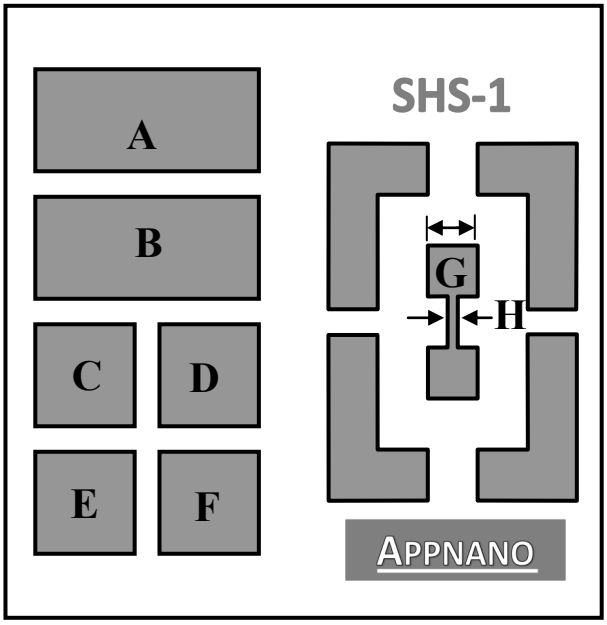


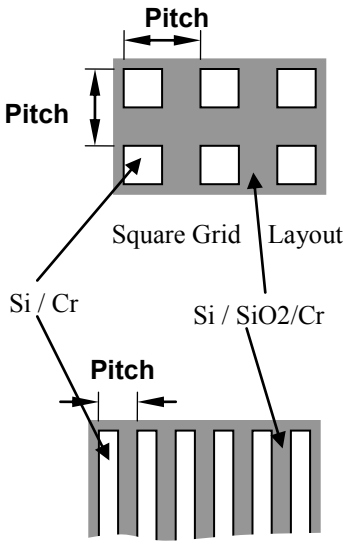

Grating Layout



Grid SEM



Grating SEM

Feature	Description	Details
A	Square grid	3 µm pitch
B	Square grid	10 µm pitch
C	Grating	10 µm pitch
D	Grating	3 µm pitch
E	Grating	50 µm pitch
F	Grating	20 µm pitch
G	Square Pad	1000 µm x 1000 µm
H	Rectangular line	1000 µm x 200 µm

Ordering Information		
Part #	**No of Chips**	**Step Height**
SHS – 1	1	1 µm
SHS – 0.1	1	100 nm

NOTES:

1. The values are nominal.
2. The feature step height and pitch are not calibrated.
3. Please contact our **Distributor** in your area to **order** the products.
4. For more technical information, please contact either our distributor in your area or e-mail us directly at info@appnano.com.

Applied NanoStructures, Inc.
1700 Wyatt Dr. Suite 12, Santa Clara, CA 95054, USA
Tel: 1 408 567 0115 Fax : 1 408 516 4917
E-mail : info@appnano.com

APPNANO **www.appnano.com**