

AUTHBC: Feasibility Boundaries for Authenticated UAV Telemetry — An Exclusion Bound, a Capacity Envelope, and Hardware Validation

Mohamed A. Farouk

AUTHBC Project — Thesis draft (auto-generated from frozen results)

Abstract—Flying ad-hoc networks stream telemetry records so small that a cryptographic signature (64–96 B) rivals or exceeds the payload (45–190 B), so per-record signing spends airtime, energy and goodput on a shared, lossy channel. The operational question is not how many bytes a scheme saves but *which configurations can run at all*. We answer it by searching four design choices jointly—record *encoding*, authentication *placement*, signature *scheme* and *batch size*—against a byte model, an NS-3-validated 802.11 broadcast model, and energy measured on Raspberry Pi 4 hardware.

Three results follow, ordered by how durable they are. An exclusion: a link whose payload cannot hold one header, one signature and one record carries no per-frame-verifiable telemetry at *any* encoding or batch size. This removes the four longest-range LoRa modes outright, and loss makes fragmentation no escape, since a unit spanning n frames verifies with probability $(1-p)^n$. Being arithmetic, it cannot move as hardware improves. A capacity envelope—the result that genuinely requires the coupling: joined to the channel model, the co-design sustains $1.9\times$ to $3.2\times$ the neighbourhood of an inline baseline, the range spanning the saturation and verifiability thresholds rather than hiding behind whichever flatters it. Bytes: 58.7% fewer on air (72.0 B/record) at an operating point compliant with 3GPP TS 22.125, meeting a criterion committed to version control two days before the result existed.

A factorial ablation narrows the co-design claim rather than inflating it: only placement and batching interact, by exactly $g_a(1-1/b)$ and so not at all at $b=1$; encoding contributes additively and the scheme axis is byte-neutral here. AUTHBC introduces no new cryptographic primitive. Its contribution is a reproducible co-design, its quantified trade-offs, and the boundary beyond which no choice of cryptography helps.

Index Terms—FANET, UAV telemetry, authentication, signature aggregation, blockchain, CBOR, 802.11, Bianchi model.

I. INTRODUCTION

A fleet of UAVs streams telemetry—position, velocity, altitude, battery, mode—at tens of records per second per node over 802.11 into a blockchain-grade, hash-chained, signed ledger. We adopt $\Lambda = 50 \text{ rec/s}$ with a $D_{\max} = 100 \text{ ms}$ freshness bound as the primary operating point: it is PX4’s MAVLINK_MODE_ONBOARD companion stream rate and it satisfies 3GPP TS 22.125 [1], and we report the surrounding region rather than defend a point (Sec. V). Each record must be *authenticated* (a signature so a verifier trusts its origin) and *chained* (a hash of the previous record, so the log is tamper-evident).

The difficulty is scale mismatch. Telemetry records are tens of bytes; an Ed25519/ECDSA signature is 64 B, a SHA-256

chain hash is 32 B, and a BLS signature is 96 B. Signing every record inline makes authentication overhead rival or exceed the payload, and on a shared, contended, lossy channel that wasted airtime directly costs goodput, energy, and freshness. How much overhead one actually pays depends on four choices: the record *encoding* e (setting the size s), the authentication *placement* (inline, self-batch, relay-aggregate, or block-level), the signature *scheme* σ , and the *batch size* b . Our thesis is that tuning any one in isolation leaves saving on the table, and that the coupling is concentrated in one specific pair: a factorial ablation (Sec. V) finds placement and batching interact exactly—placement is worth nothing without batching—while encoding contributes additively and the scheme axis is byte-neutral here. Calling all four “inseparable” would overstate what the model supports. We make this precise (Sec. III), implement it (Sec. IV), and test the falsifiable headline of Sec. V.

Contributions.

- **An exclusion bound instantiated on a real band.** Applying the payload-exclusion argument [2] with a measured $H_f=44 \text{ B}$ partitions EU868: DR0–2 fail on the signature alone and DR3 by six bytes, so four of seven data rates admit no per-frame-verifiable telemetry at any encoding or batch (Sec. VI). The bound is not ours; the instantiation, the measured constant and the fragmentation corollary are.
- **A feasibility envelope, not a byte ratio.** Coupling the byte model to an NS-3-validated broadcast model yields the largest neighbourhood each configuration can sustain ($1.9\text{--}3.2\times$ the inline baseline), reported at two thresholds because they answer different questions (Sec. V).
- **An ablation that narrows our own claim.** Only placement $\times$ batching interact, by exactly $g_a(1-1/b)$; encoding is additive and scheme is byte-neutral here. We report this because it contradicts the four-axis framing we began with.
- **Reproducibility as a result, not a promise.** A staleness gate re-derives all 16 model-derived artifacts byte-identically on every commit; the remainder require NS-3 or the hardware rig and carry provenance headers instead, and we say which is which rather than claiming “all results”. The success criterion was committed to version control two days before the result existed, and the correc-

tions this discipline forced—including retractions—are recorded rather than quietly absorbed (Sec. VII).

II. RELATED WORK AND POSITIONING

Citation integrity. Every reference in this section was confirmed against the Crossref record for its DOI, and no figure is quoted from a source we have not read. Where a source establishes prior art for something we might otherwise have claimed, that is said explicitly rather than left to the reader.

(a) Signatures for constrained authentication. ECDSA [3] yields 64 B P-256 signatures at 128-bit security but is randomness-sensitive; Ed25519 [4], [5] uses a twisted-Edwards curve with deterministic nonces for fast, misuse-resistant, batchable verification; BLS [6] gives the shortest signatures via pairings, and [7] aggregates n signatures into one at the cost of expensive pairing verification. AUTHBC introduces *no new primitive*; it quantifies *where and when* each scheme wins once placement and batching are fixed (Sec. III-D), finding Ed25519 dominant for self-batch and BLS worthwhile only for cross-signer relay traffic.

Independent work on UAV swarms adopts exactly the design we treat as the naive baseline: Rotta and Myktyyn attach “a HMAC-256 signature with a timestamp” to *each* broadcast telemetry message, and observe that “telemetry messages in the MAVLink protocol are much smaller than 256 bytes” [8]—corroborating both our premise and our baseline from outside this work. Their construction is a symmetric MAC under a group key, so it provides integrity and group authenticity but *not* non-repudiation, and therefore cannot underwrite a tamper-evident ledger attributable to a specific UAV. That is a different trust model, not a cheaper solution to ours.

(b) Batch/aggregate verification in vehicular/IoT networks. Zhang *et al.* [9] let a roadside unit “verify multiple received signatures at the same time”, motivated by exactly the pressure we face from the other side: a hard deadline, in their case DSRC’s 300 ms, within which sequential verification does not scale. Their batching is *receiver-side* and buys verification time; ours is *sender-side* and buys airtime, and the two are complementary rather than competing. AUTHBC generalizes from receiver batching to authentication *placement*, co-designs it with encoding and scheme, and adds the loss-robustness frontier that pure aggregation ignores.

(c) Blockchain/hash-chained ledgers for UAV/IoT provenance. Nakamoto’s hash chain [10] makes a log tamper-evident. UAV swarm communication architectures and their routing assumptions are reviewed in [11], and recent NS-3 swarm studies combine a hybrid MAC with per-layer security [12]; UAV-blockchain systems, surveyed in [13], place telemetry or attestations on such a chain, gaining integrity at per-record overhead cost. AUTHBC targets exactly that substrate byte/energy cost and is agnostic to the consensus layer.

(d) Compact serialization and delta coding. CBOR [14] and MessagePack [15] give compact binary encodings; delta coding of telemetry time series is established practice, most

prominently in Gorilla [16], which stores delta-of-delta timestamps and XOR-folded values for a $10\times$ reduction. Our variant differs in one respect that the link forces: Gorilla is a database and can chain deltas indefinitely, whereas a lossy broadcast link makes an unbounded chain fragile, so we re-anchor on a keyframe every K records and pay the resulting size for loss independence. AUTHBC measures these head-to-head. A smaller payload raises the auth *fraction*, so batching returns a larger *percentage* of the frame; but the absolute saving is $(H_f + g_a)(1 - 1/b)$, identical for every encoding, so that is a ratio-scale effect and not an interaction.

(e) Analytical 802.11 modelling. Bianchi [17] models the DCF as a per-station Markov chain whose fixed point yields closed-form saturation throughput. AUTHBC uses it as the airtime cost model inside the optimizer and validates it against NS-3 [18].

(f) Broadcast authentication for UAS, and why it is not a baseline. The closest published system is TBRD [19], a TESLA-based [20] authenticator for UAS Remote ID broadcast, reporting $\approx 50\%$ lower authentication overhead than digital signatures. It is *not* a comparator for this work, and the reason is instructive rather than incidental: TESLA authenticates with a MAC and discloses the key later, so it is symmetric and provides *no non-repudiation*. A provenance ledger needs a record to remain attributable to its originator after the fact, which a disclosed key cannot deliver. The two systems are therefore not substitutes, and a byte-for-byte overhead comparison between them would be misleading.

What makes the pairing worth stating is that both buy authentication bytes with the *same* currency — latency — but spend it at opposite ends of the link (Table I).

TESLA is preferable where staleness of *data* is intolerable but staleness of *trust* is acceptable; the reverse holds for a tamper-evident ledger, where a record that cannot yet be verified cannot yet be committed. We claim no superiority over TBRD. What our analysis contributes to that comparison is that the byte saving from batching is exactly $1 - 1/b$ and hence bounded by the freshness budget — a constraint TESLA sidesteps by moving the delay to the receiver, and one that any future hybrid would have to confront.

Overall. AUTHBC is a hardware-validated co-design and measurement study, not a new construction. Prior work typically fixes three of the four knobs; we search all four jointly under a single pre-registered criterion, and report which of them actually interact rather than assuming they all do. Where the vehicular literature builds *new* aggregate-signature constructions to cut broadcast overhead, we ask a complementary question: which combination of *existing, standardised* primitives and system parameters is feasible on a given link, and where is no combination feasible at all.

III. SYSTEM MODEL AND THEORY

Fig. 1 gives the pipeline, the four design axes, and the kind of evidence behind each stage.

A record is integer-only fixed-point (floats break canonical-CBOR determinism) with a 32 B `prev_hash` chain link;

TABLE I

TWO WAYS TO BUY AUTHENTICATION BYTES WITH LATENCY. NOT COMPETING DESIGNS: THE LAST ROW IS A HARD REQUIREMENT FOR A LEDGER, AND IT IS WHAT RULES TESLA OUT HERE.

	TESLA / TBRD [19]	AUTHBC (this work)
auth bytes/msg	$\approx 50\%$ of a signature	$(H_f + g_a)/b = 27 \text{ B}$ at $b=4$
what is delayed	verification (key disclosure)	transmission (batch fill)
where the delay sits	at the receiver	at the sender
verifiable on arrival	no — awaits the next interval	yes — each frame self-verifies
loss of one unit	breaks a whole key interval	loses one frame, $V = 1 - p$
non-repudiation	no (symmetric MAC)	yes (signature)

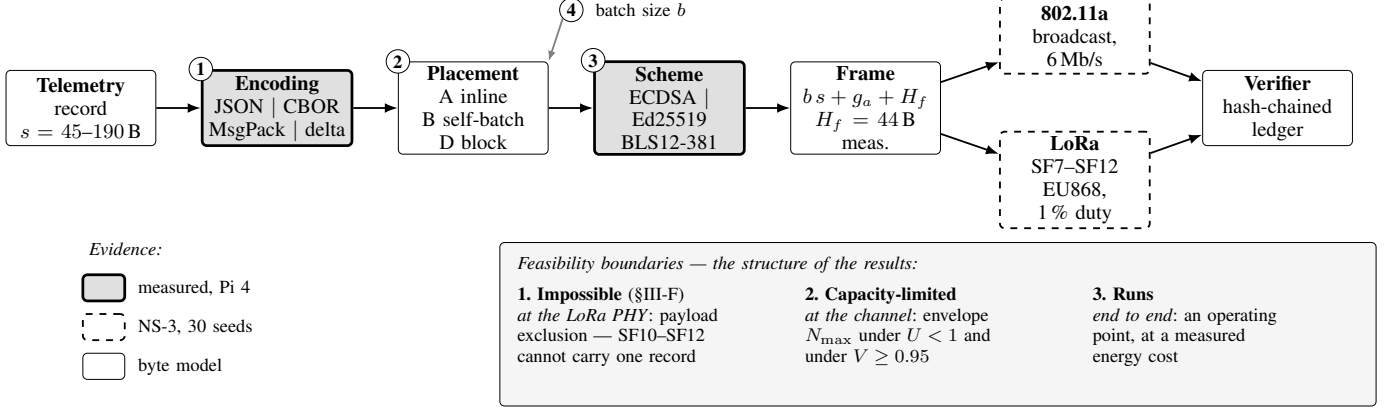


Fig. 1. System model and the provenance of every stage. Four design axes (①–④) are searched jointly; only encoding and placement interact appreciably (Table IV). Shading records *what kind of evidence* supports each stage: shaded blocks are measured on hardware, dashed blocks are simulated and validated against closed-form models over 30 seeds, plain blocks are the byte model itself. The three boundaries below are the paper’s structure — a configuration is impossible, capacity-limited, or it runs.

its encoded size is s . A frame carries b records, a header $H_f = 44 \text{ B}$ measured from the implemented wire format, and an authentication object g_a (64 B Ed25519/ECDSA, 96 B BLS), bounded by the MTU $M = 1500 \text{ B}$. On-air bytes per record, by placement:

$$A \text{ (inline)} : s + g_a + H_f/b, \quad (1)$$

$$B \text{ (self-batch)} : s + (g_a + H_f)/b, \quad (2)$$

$$D \text{ (block, } n \text{ frames)} : s + (g_a + nH_f)/b. \quad (3)$$

A. T1: overhead dominance

For inline authentication the pure-authentication fraction is

$$\varphi = \frac{g_a}{s + g_a}. \quad (4)$$

For $s = 45\text{--}190 \text{ B}$ and $g_a = 64 \text{ B}$, $\varphi = 25\text{--}59\%$: the smaller the payload, the more the signature dominates. T2–T5 quantify what can be done about this, and where it stops.

B. T2: batching cure and amplification

Self-batch folds b records under one signature, so the per-record auth cost $(g_a + H_f)/b \rightarrow 0$. Packing to the MTU gives a goodput amplification over single-record framing:

$$A = \frac{M}{M - H_f - g_a}, \quad (5)$$

since at the MTU-filling batch $b_{\max}$ the frame $\approx M$ and $b_{\max}s \approx M - H_f - g_a$. Inline (A) can *never* amortize its per-record signature (only H_f/b shrinks).

T2a: when does A apply? (*applied analysis, not a new result* — the diminishing-returns structure below is standard in the packet-aggregation literature.) The derivation assumes the MTU caps the batch. Under a freshness bound the cap is instead $b = \lfloor \Lambda D_{\max} \rfloor$, which does not depend on s ; then $C(s) = s + (g_a + H_f)/b$ and $dC/ds = 1$ exactly—compression pays $1\times$, not $A\times$, and the residual authentication cost is a floor compression cannot reach. The boundary is $s < (M - H_f - g_a)/(\lfloor \Lambda D_{\max} \rfloor + 1)$. At $\Lambda=20 \text{ rec/s}$ and $D_{\max}=250 \text{ ms}$ this is 232.0 B on 802.11, above every encoding studied, so **A is never operative there**; on a low-rate link ($M=222$) the MTU binds again and $A=1.95$ is operative. The “compression pays $\times A$ ” leverage is therefore real and *exclusive to low-rate links*.

C. T3: loss-robustness frontier

Let p be per-frame loss and $V = \Pr[\text{a received record is independently verifiable}]$. Self-batch frames self-verify, so $V_B = 1 - p$, independent of b . A block signature spanning $n(b) = \lceil (bs + g_a + H_f)/M \rceil$ frames needs all fragments, so $V_D = (1 - p)^n$. Whenever $n > 1$, $V_B = 1 - p > V_D = (1 - p)^n$: self-batch Pareto-dominates the marginal byte saving of over-aggregation.

D. T4: power-independent scheme crossover

Per-record energy is $E = P_c (\text{CPU time}) + P_r (\text{radio time})$. Comparing Ed25519 and BLS, which wins depends on the powers *only* through their ratio $\kappa = P_r/P_c$:

$$\text{BLS wins} \iff \kappa > \kappa^* = \frac{\Delta\text{CPU}}{\Delta\text{RADIO}}, \quad (6)$$

where ΔCPU is BLS's extra CPU and ΔRADIO its radio-time saving. κ^* is the break-even power ratio, obtained without measuring a single watt. Wi-Fi receive power sits below CPU-active power, so plausible platforms have $\kappa \lesssim 0.5$.

E. T5: co-design optimum

Enumerate $(e, \sigma, \text{placement}, b)$ and take the Pareto front over $\{\text{min bytes, min energy, min staleness, max } V\}$ subject to MTU fit, $V \geq 1 - \epsilon$, freshness $D(b) \leq D_{\max}$, and verify-throughput $t_{\text{verify}}(b) \Lambda \leq 1$. The optimum is the smallest deterministic encoding under self-batch at the largest *freshness*-feasible batch — not the largest MTU-feasible one. Which ceiling binds is itself a result (T2a): at telemetry rates fill time dominates $D(b)$, so $b \lesssim \Lambda D_{\max}$ and the MTU is never reached.

F. The payload-exclusion bound (applied, not new)

T1–T5 ask what a saved byte buys. This bound asks the prior question — whether a link admits authenticated telemetry at all. The inequality is not ours: Gündoğan et al. [2] compute exactly this residual for 802.15.4/NDN, and the post-quantum literature reports NIST signatures as incompatible with 5G SIB1's 372 B limit. We restate it because it delimits our contribution, and because one composition of it appears not to have been made explicit (below). A frame that is independently verifiable must carry the header, the authentication object and at least one record, so a link of maximum payload M is usable iff

$$s_{\max}(M) = M - H_f - g_a \geq s_{\min}. \quad (7)$$

Fragmenting an oversized signature is no escape: by T3 a unit spanning n frames verifies with probability $(1 - p)^n$, so $V \geq 1 - \epsilon$ forces $n \leq \lfloor \ln(1 - \epsilon) / \ln(1 - p) \rfloor$, which is at most 1 whenever $\epsilon \leq p$ — fragmentation is excluded outright. Equation (7) is therefore evaluated at $n=1$ and is an exclusion, not an inconvenience. Both ingredients are individually known — the residual above, and that a fragmented unit needs every fragment — but the consequence is worth stating: the *sliced-signature* workaround proposed for constrained links is unavailable in any regime where the verifiability target is no looser than the loss rate.

Three tiers follow, and each names a different escape route: $M < g_a$ (only a smaller signature helps — no header design, encoding, batching or chaining can), $g_a \leq M < H_f + g_a$ (only a leaner header), and $H_f + g_a \leq M < H_f + g_a + s_{\min}$ (the sole regime an encoder can attack, and where T2's amplification is operative). Section VI applies this to LoRa.

G. Channel and energy models

At the 6 Mb/s OFDM base rate, broadcast airtime is $T_{\text{air}}(L) = T_{\text{phy}} + 8(L + \text{MAC})/R + \text{DIFS} + \delta$ (fixed part $\approx 100 \mu\text{s}$); unicast adds SIFS and an ACK ($\approx 156 \mu\text{s}$). Under contention among N saturated stations, the Bianchi DCF fixed point is

$$\tau = \frac{2(1 - 2p_c)}{(1 - 2p_c)(W + 1) + p_c W (1 - (2p_c)^m)}, \quad (8)$$

$$p_c = 1 - (1 - \tau)^{N-1},$$

with $W = 16$, $m = 6$, solved by damped iteration; saturation throughput $S = P_{tr} P_s 8L/E[\text{slot}]$. Self-batch per-record energy is $E = P_c(t_{\text{enc}} + 2t_{\text{hash}} + t_{\text{sign}}/b + t_{\text{verify}}/b) + P_r T_{\text{air}}(\text{frame})/b$. The hash term is the chain link $\text{prev_hash} = H(\text{record})$, charged twice per record because the sender extends the chain and the receiver re-verifies it; unlike the signature it does *not* amortize over b .

IV. IMPLEMENTATION AND VALIDATION

Everything reported here is produced by one codebase, from measured inputs, under a fixed reproduction procedure. We describe what was built and how each component was checked, because the credibility of a feasibility boundary rests entirely on the models that draw it.

Encoders and schemes. Four record encodings (JSON, CBOR, MessagePack, and a delta codec with a keyframe every $K=16$ records) and three signature schemes (ECDSA-P256, Ed25519, BLS12-381) are implemented behind one interface. Records are integer-only fixed point: floating point breaks canonical-CBOR determinism, and a non-deterministic encoding cannot be hash-chained. Each scheme is checked against published known-answer vectors (RFC 8032, Wycheproof, the Chia BLS suite) before any timing is taken.

Timing harness. Crypto and encode timings are medians over repeated runs with the garbage collector disabled, a warmup phase, a checksum on the work performed to prevent dead-code elimination, and bootstrap confidence intervals. Timings used by the optimizer are measured *on the Raspberry Pi 4 target*, not on the development host: the two disagree on which signature scheme is faster (Sec. III-D), so using x86 numbers would select the wrong scheme.

Wire format and placements. A hash-chained store produces canonical-CBOR wire vectors, from which the frame header is *measured* at $H_f=44$ B rather than assumed. All four placements are implemented over that format, so the byte model is validated against bytes actually emitted.

Channel model. The 802.11a airtime model keeps broadcast and unicast separate — they are not the same model with an ACK removed, which Sec. V shows quantitatively. Both are validated against NS-3 3.48 over 30 seeds, and the broadcast airtime is additionally checked against two Raspberry Pi 4 radios.

Optimizer. An exhaustive search over (encoding $\times$ scheme $\times$ placement $\times$ batch) evaluates the byte, energy, freshness and verifiability models at every point and returns the Pareto front, so the reported optimum is not the output of a heuristic.

Reproduction procedure. Every artifact carries an environment and configuration-hash header. A gate re-derives all 16 model-derived artifacts byte-identically on each commit and fails if any differs; artifacts requiring NS-3 or the hardware rig cannot be re-derived in that gate and are labelled as such rather than counted as reproduced. Figures are regenerated from the same frozen CSVs, and a separate check asserts that every figure the paper cites is still produced by a generator that runs — added after three figures were found plotting superseded constants (Sec. VII).

V. RESULTS

Three boundaries, in order of how durable they are. The question an operator has is not how many bytes a scheme saves but *which configurations can run at all*. We answer it as three separate boundaries, and we order them by how likely each is to survive contact with a better model:

- 1) **Impossible** (Sec. VI). A link whose payload cannot hold one header, one signature and one record admits no per-frame-verifiable telemetry at *any* encoding, batch or scheme. With a measured $H_f=44$ B this excludes four of seven EU868 data rates. It is arithmetic, so unlike everything else here it cannot move.
- 2) **Capacity-limited** (Table V). Above that floor the binding constraint is the shared medium. Coupling the byte model to an NS-3-validated broadcast model gives the largest neighbourhood each configuration sustains: the co-design carries $1.9\text{--}3.2\times$ the inline baseline, reported at two thresholds because they answer different questions.
- 3) **Runs** — and what it costs. The byte reduction (58.7% total, 72.0 B/record) is best read as the *mechanism* that moves the boundary outward, not as the result. Its authentication component reduces to $1 - 1/b$ and is invariant to header size, signature size, encoding and scheme, so quoting it as a headline would credit four axes for what two produce.

The airtime model underneath boundary 2 is validated twice: against NS-3 over 30 seeds, and against two Raspberry Pi 4 radios, where the predicted 1.988 ms broadcast airtime measures 1.995 ms, a 0.36% gap (equivalently, a 502.98 fps ceiling measured at 501.19).

All values are from frozen CSVs. Byte and model results were derived on an x86 host (Intel i5-14400F); the crypto timings, encode timings and both power figures feeding the energy column are *measured on the Raspberry Pi 4* thesis platform (decision D8), so the energy column is platform-consistent ARM throughout.

E1 (Table II). The auth fraction climbs from 25% (JSON) to 59% (delta): compressing the payload makes a fixed 64 B signature dominate—T1 confirmed.

P1 crypto (x86 medians). ECDSA-P256 sign/verify 26.2/78.5 μ s; Ed25519 29.1/95.0 μ s; BLS 324.6/1016.5 μ s; BLS aggregate-verify($b=8$) 3445 μ s. Notably, ECDSA *beats* Ed25519 on x86 (OpenSSL P-256 assembly)—the reverse of the usual ordering. The ordering *flips* on the ARM target

TABLE II
E1: OVERHEAD DOMINANCE (T1), 30 SEEDS. $\varphi = 64/(s + 64)$.

encoding	mean bytes s	φ
JSON	191.1	25.1%
CBOR	66.25	49.1%
MessagePack	65.16	49.6%
delta	45.00	58.7%

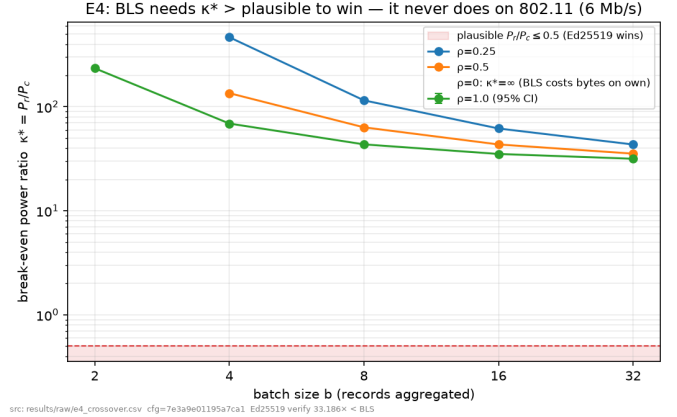


Fig. 2. E4: break-even power ratio $\kappa^*(b)$ per relay fraction. Every curve sits far above the plausible band ($\kappa \leq 0.5$), so Ed25519 wins on 802.11; the $\rho=0$ curve is ∞ (BLS costs bytes on own traffic).

(Ed25519 259.5 vs ECDSA 326.9 μ s verify), which is what the optimizer uses; both are 64 B, so the byte results are identical either way. Because both are 64 B the tie is broken on measured energy, and on the ARM target that selects **Ed25519** — which is what the optimizer reports.

E2 (T2/T2a). At MTU 1500, self-batch, the measured amplification $A_{@b} = (\text{bytes/rec})/s$ matches $A = M/(M - H_f - g_a)$ within 5% (integer- b slack, shrinking with s); delta reaches $b_{\max} = 30$ with $A_{@b} = A = 1.0776$ exactly. The MTU sweep also straddles the T2a boundary: $M=256$ is MTU-limited ($A=1.73$ realised), while $M=576$ and $M=1500$ are freshness-limited and realise $A=1.0000$ —i.e. the $b_{\max}=30$ above is *unreachable* at telemetry rates.

E3 (T3). $V_B \approx 1 - p$ flat in b (0.90 at $p=0.10$); $V_D = (1 - p)^n$ drops the moment a block spans $n > 1$ frames (0.81 at $p=0.10$, $b=40$)—the frontier is exactly T3.

E4 (T4, Fig. 2). On ARM—the thesis platform—Ed25519 verify is $33.2\times$ cheaper than BLS verify ($10.7\times$ on x86). Across the full relay-fraction $\times$ batch $\times$ rate grid (80 points), Ed25519 wins *every* one (minimum $\kappa^* = 31.6 \gg 0.5$). At 96 B, BLS carries more auth bytes than Ed25519 on own self-batch traffic ($\kappa^* = \infty$) and saves bytes only on relay traffic for $b \geq 2$; its $33.2\times$ verify cost on ARM keeps Ed25519 optimal for any plausible power ratio.

E5 (Table III, Fig. 4). The optimizer selects delta + Ed25519 + self-batch at $b=4$, cutting total on-air bytes from 174.3 to **72.0 B/record**—a **58.7%** reduction versus the Pillar-1 baseline at $V = 0.95$, $p = 0.05$. Hand-checked: $45.0 + 108/4 = 72.0$ B/record. The same $b=4$ is reached at

TABLE III

E5: CO-DESIGN HEADLINE (T5) UNDER $V \geq 0.95$, $p=0.05$ AND $D \leq 250$ MS. TOTAL-BYTE CUT = $(174.3 - 72.0)/174.3 = 58.7\%$; AUTH CUT = $(108 - 27.0)/108 = 75.0\% \geq 40\% \Rightarrow \text{PASS}$. $H_f=44$ B IS MEASURED FROM THE IMPLEMENTED WIRE FORMAT, NOT ASSUMED.

config	enc	σ	place	auth B/rec	total B/rec	V	D (ms)
optimized	delta	Ed	B, $b=4$	27.00	72.00	0.95	200
A+CBOR (Pillar-1)	cbor	Ed	A	108.0	174.25	0.95	50
A+JSON (naive)	json	Ed	A	108.0	299.09	0.95	51
D-over-agg	cbor	Ed	D, $b=40$	3.80	70.05	0.9025	2004

TABLE IV

ATTRIBUTION OF THE E5 SAVING. THE AUTHENTICATION TERM IS $1 - 1/b$ AND IS INVARIANT TO H_f , g_a , ENCODING AND SCHEME; THE ENCODING TERM MOVES PAYLOAD ONLY. REPORTING THE SINGLE 75.0% FIGURE WOULD CREDIT FOUR AXES FOR WHAT TWO PRODUCE.

axis	what it moves	reduction	share
placement $\times$ batching	auth B 108 $\rightarrow$ 27.0	75.0%	79.2%
encoding	payload B 66.25 $\rightarrow$ 45.0	32.1%	20.8%
scheme	neither (both 64 B)	—	—
combined	total B 174.3$\rightarrow$72.0	58.7%	100%

TABLE V

FEASIBILITY ACROSS THE OPERATING REGION, NOT AT ONE CHOSEN POINT (802.11a 6 MB/S, BROADCAST MODEL OF [21]). $N_{\max}$ IS GIVEN AT BOTH THRESHOLDS: SATURATION ($U < 1$) AND THE MEASURED $V \geq 0.95$ BOUNDARY ($U \approx 2.44$, INTERPOLATED BETWEEN THE MEASURED $U=2.23$ AND $U=3.34$ ROWS). BATCH OBEYS $b \leq \Delta D_{\max}$, SO BYTES **DEPEND ONLY ON THE PRODUCT** — THE FIRST TWO BLOCKS ARE BYTE-IDENTICAL AND DIFFER ONLY IN CAPACITY AND IN COMPLIANCE.

configuration	Λ (rec/s)	$D_{\max}$ (ms)	b	$U < 1$	$N_{\max}$ $V \geq 0.95$ (mean)	$V \geq 0.95$ (per run)
<i>Primary: compliant with 3GPP TS 22.125 [1]</i>						
optimized delta/B	50	100	4	35	100	64–91
A+CBOR (Pillar-1)	50	100	1	18	31	24–29
<i>Relaxed freshness: same bytes, larger swarm, exceeds the standard</i>						
optimized delta/B	20	250	4	103	213	163–201
A+CBOR (Pillar-1)	20	250	1	32	88	54–80
A+JSON (naive)	20	250	1	25	53	35–48
<i>Compliant but below the batching threshold ($\Delta D_{\max} < 4$)</i>						
optimized delta/B	20	100	1	34	98	62–89
optimized delta/B	10	100	1	78	180	134–169

either operating point, with freshness $4/50 = 80$ ms at the adopted compliant point and $4/20 = 200$ ms at the relaxed one.

Feasibility is the co-design result (Table V). The substantive claim is not how many bytes are saved but which configurations *can run*. Coupling the byte model to the broadcast channel model gives the largest neighbourhood each configuration sustains. Two thresholds are reported because they answer different questions. *Saturation* throughput ($U < 1$) is what the medium carries when every node is backlogged, and it is conservative: simulation shows 98.9% delivery still at $U=1$, with *measured* verifiability V_{meas} crossing 0.95 only near $U \approx 2.44$. We report both rather than choose, because choosing would select the flattering one.

A third column is reported because the second one is a

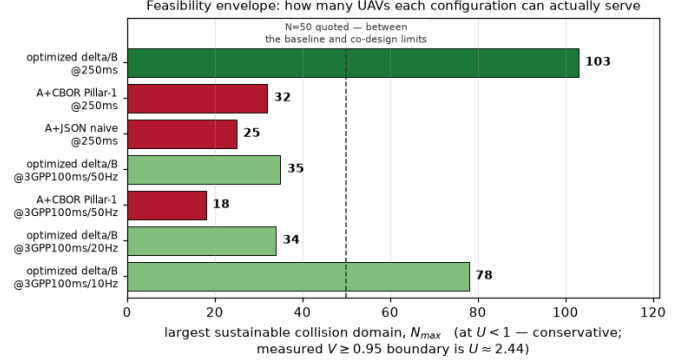


Fig. 3. Boundary 2. Largest single collision domain each configuration sustains. This is the result that requires the coupling: the byte model alone cannot produce it, and the channel model alone does not know the frame size. The co-design advantage is visible as horizontal displacement, and it is variable in size — see Table V for both thresholds.

statement about a *mean*. The $V \geq 0.95$ crossing is located where the mean delivered fraction across seeds meets the target, but V is a reliability requirement, and at the crossing the distribution straddles it: at $U=2.23$ the mean is 0.962 while 10 of 30 seeds fall below 0.95. Reading the criterion per realisation instead—at least 95% of runs must individually meet V —places the crossing in $U \in (1.67, 2.23]$ and gives the ranges in the last column. We headline the mean, because it is the reading under which the two thresholds are computed consistently, and report the per-run figures beside it because they are what an operator promising a reliability target would need. **The co-design advantage is insensitive to the choice:** the ratio spans $1.94 \times$ – $3.23 \times$ under the mean reading and $2.51 \times$ – $3.14 \times$ under the per-run reading, so the conclusion does not depend on which criterion a reader prefers.

Across the operating region the co-design multiplies the supportable swarm by between $1.9 \times$ and $3.2 \times$ (Table V): $1.94 \times$ and $3.23 \times$ at the two thresholds for the compliant point, $3.22 \times$ and $2.42 \times$ for the relaxed one. **The advantage is robust in existence and variable in size**, and we state it that way; a single “ $\approx 3 \times$ ” would be true of two of those four numbers and misleading about the other two. What no single axis produces is the advantage itself: it needs the encoding (frame size) and the placement–batch pair (frames per second) *together with* the channel model. The scheme axis is byte-neutral here and contributes nothing to this figure; it is decided on energy instead (T4).

Choosing the operating point, and what it costs (item

B3). Because $b \leq \Lambda D_{\max}$, *only the product* $\Lambda D_{\max}$ sets the batch, and therefore the bytes. Two very different operating points give the same $b=4$ and the same 72.0 B/record: (20 Hz, 250 ms) and (50 Hz, 100 ms). They are not equivalent, because 3GPP TS 22.125 [1] requires ≥ 10 msg/s and ≤ 100 ms latency, which the first violates. **We adopt the compliant point (50 Hz, 100 ms) as primary.** It is not a contrived rate: 50 Hz is PX4’s MAVLINK_MODE_ONBOARD companion stream rate, read from `mavlink_main.cpp` [22]; ArduPilot’s defaults are vehicle-specific rather than a single rate [23]. The byte result is unchanged; what it costs is swarm size, $213 \rightarrow 100$ at the $V \geq 0.95$ boundary and $103 \rightarrow 35$ at saturation. The relaxed point is retained in Table V because a deployment outside the standard’s scope may prefer it, and because reporting only the compliant point would hide the size of the trade.

The region also has a floor. Keeping $b \geq 4$ under a 100 ms bound needs $\Lambda \geq 40$ Hz; at 20 or 10 Hz the same deadline forces $b=1$ and the co-design collapses to a 12.2% saving. **The batching benefit is therefore not available at every compliant operating point** — it requires a telemetry rate high enough that four records accumulate within the deadline, which is a constraint on the application, not on the cryptography.

Attributing the saving (Table IV). We separate the axes rather than report one figure, because they are not equal contributors. Authentication overhead per record is $(H_f + g_a)/b$; the record size does not appear, so the auth-byte reduction $[(H_f + g_a) - (H_f + g_a)/b]/(H_f + g_a) = 1 - 1/b$ is invariant to header size, signature size, encoding and scheme. We verified this by substitution over $H_f \in \{20, 40, 80, 200\}$ B $\times g_a \in \{48, 64, 96\}$ B: all twelve give 75.0000%, and measuring H_f at 44 B rather than the assumed 40 B moved it not at all. Independently, the frozen E2 data gives the same auth overhead to three decimals for all four encodings. The encoding axis is nonetheless load-bearing—it spans $3\times$ on total bytes—but it acts on payload, contributing 20.8% of the saving against placement and batching’s 79.2%. The scheme axis is byte-neutral here (Ed25519 and ECDSA are both 64 B) and is decided on energy and verification throughput instead (T4).

The pre-registered criterion, and how much of it was actually at risk. The success criterion—cut on-air authentication bytes by $\geq 40\%$ versus A+CBOR while holding $V_{\text{tgt}} \geq 0.95$ at $p=0.05$ —was committed to version control in the project’s initial scaffold, two days before the result it judges existed; both commits are in the public history, so the ordering is checkable rather than asserted. We report it as pre-registered even though our own later analysis showed the authentication ratio to be a weak headline: moving the goalposts after seeing the data would be the larger error.

Its two halves were not equally at risk, and we state that rather than let the word “falsifiable” do work it has not earned. For the frame-level placements $V_{\text{tgt}} = 1 - p$ independently of encoding, batch and scheme, so with p fixed at 0.05 and $\epsilon = 0.05$ the verifiability half is satisfied *exactly, by construction*—

indeed feasibility requires $p \leq \epsilon$ identically, since $1 - p$ is the best verifiability any placement attains. **The byte reduction carried the falsifiability on its own.** Measured verifiability, written V_{meas} throughout, is a separate quantity obtained from simulation and is not what this criterion tested.

Sensitivity to p . Fixing $p=0.05$ invites the question of how much rides on it, so we swept it. The answer is that nothing does, until everything does: for every $p \leq \epsilon$ the optimizer returns the *same* configuration (delta, Ed25519, self-batch $b=4$, 72.0 B/record) from the same 44 feasible points, and at $p=0.051$ the feasible set is **empty**. This is not a gradient but the cliff of T3: frame-level placements attain $V = 1 - p$ at best, so $p > \epsilon$ excludes every configuration rather than shifting the choice among them. The operating point is therefore insensitive to p in the only sense available — and the sensitivity that matters is not to the value of p but to whether it exceeds the target.

Ablation: which axes actually interact. A decomposition attributes a total and is possible even when the axes are independent, so it cannot establish the co-design claim on its own. We therefore ran the full factorial on bytes/record. Every interaction involving *encoding* is **exactly zero**— s enters $s + (H_f + g_a)/b$ additively, so it cannot interact—while placement $\times$ batching is -24.0 B/rec, equal in magnitude to placement’s own main effect. That equality is the signature of a pure interaction, and the closed form says why: the placement benefit is $g_a(1 - 1/b)$, which is **identically zero at $b=1$** . Placement A and B are byte-identical on a single-record frame; batching is what gives placement anything to amortize.

So the coupling is real but narrower than “four coupled knobs” suggests, and we state it that way: one genuine two-axis interaction (placement $\times$ batching), one additive contributor (encoding, 146 B/rec of the saving and the largest main effect), and one axis that does not move bytes at the operating point (scheme). The intuition that a smaller payload “increases the value of batching” holds only on the *percentage* scale—the absolute saving is 81.0 B for JSON, CBOR and delta alike—and two effects that are additive on an absolute scale always appear to interact once expressed as ratios.

Which constraint binds is itself the result. Ignoring freshness, the byte-optimal batch is $b=30$ at the MTU knee, cutting 96.7%—but the oldest record in such a batch waits **1.50 s**, $6.0\times$ over $D_{\max}$. Because fill time dominates the delay, the admissible batch obeys $b \lesssim \Lambda D_{\max}$ *independent of encoding and scheme*, so freshness binds long before the MTU does at telemetry rates. The co-design answer is therefore a frontier, not a point: $b=1 \rightarrow 4$ trades 0/50/66.7/75% auth-byte reduction against 50/100/150/200 ms of staleness, with sharply diminishing returns. Over-aggregation (D) is byte-competitive (3.60 B) but *fails* $V \geq 0.95$ ($0.9025 = (1 - p)^2$)—a live demonstration of the T3 frontier—and misses freshness by $8\times$.

NS-3 validation (Table VI, Fig. 5). Unicast validates the Bianchi model [17] to $+1.29/-0.40\%$ across $N = 5-50$ (mean over 30 seeds; the median-based derivation in Table VI gives $+1.33/-0.37\%$). Broadcast requires a *different* model, not

E5 co-design (T5): optimized cuts auth bytes 75.0% vs A+CBOR at $V \geq 0.95$, $p=0.05$ [PASS]

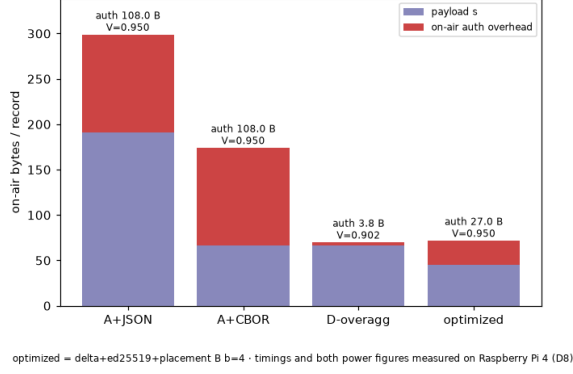


Fig. 4. E5: on-air bytes/record (payload + authentication) for the optimized configuration versus the baselines. Authentication overhead falls from 108 B to 27.0 B under the 250 ms freshness bound ($H_f=44$ B measured, $g_a=64$ B, $b=4$).

TABLE VI

ANALYTIC DCF MODELS VS. NS-3 3.48, RELATIVE GAP (SIM - MODEL)/MODEL. MEDIAN OVER 30 SEEDS, EXACT OFDM AIRTIMES; REGENERATED FROM THE FROZEN `NS3_CONTENTION.CSV`. THE NAIVE REDUCTION IS THE UNICAST MODEL WITH τ FIXED AT $2/(W+1)$, AND IT UNDER-PREDICTS BY $17.3\times$ AT $N=50$ — THE COLUMN EXISTS TO SHOW THAT BROADCAST NEEDS A DIFFERENT MODEL, NOT A MODIFIED ONE.

N	unicast vs. [17]	broadcast vs. naive reduction	broadcast vs. [24]
5	+0.54%	+0.1%	-0.07%
10	+1.33%	+3.4%	-0.12%
20	+1.14%	+32.8%	+0.39%
35	+0.24%	+268%	-0.56%
50	-0.37%	+1631%	-0.27%

the same one with the ACK removed. Reducing the unicast model by fixing $\tau = 2/(W+1)$ under-predicts NS-3 by $17.3\times$ at $N=50$ (Table VI). PHY-trace instrumentation shows the cause is not frame capture—which we measure at 0%, every successful decode arriving from a single-transmitter busy period—but the *backoff counter consecutive freeze process*: with no ACK the contention window never doubles, so a station that has just transmitted may redraw a zero backoff and seize the medium one slot ahead of every deferring station, whose counter is necessarily ≥ 1 . This is precisely the effect analysed by Ma and Chen [21], [24], whose closed form reproduces our measurements to within 0.51% on throughput (30 seeds) and 2.49% on the looser success-probability and idle-slot-occupancy statistics; the unicast counterpart is the “anomalous slot” analysis of Tinnirello *et al.* [25], which our unicast traces independently confirm. We claim no novelty for the mechanism; our contribution is its validation at $W_0=16$ under 802.11a timing (the original studies used $W_0=32, 128$ at 1 Mb/s) and a direct slot-level measurement of it.

A. Comparison against a published external scheme

Every baseline so far is internal — inline signing under different encodings — which measures improvement but not standing. The nearest published comparators are certi-

Analytic DCF models vs NS-3 3.48 (L=1400 B, per-mode matched)

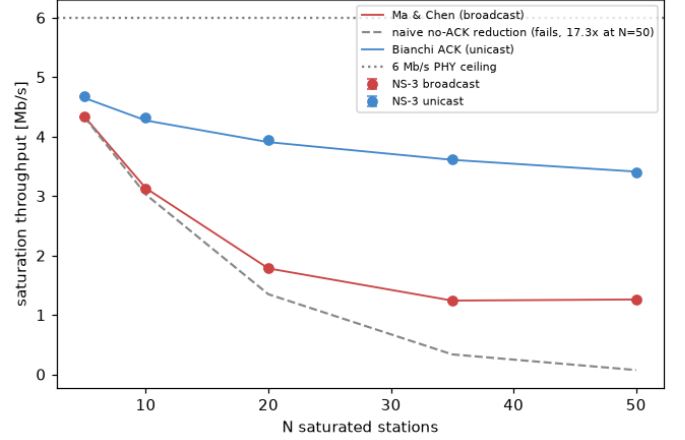


Fig. 5. Analytic DCF models vs. NS-3 3.48 saturation throughput. Unicast matches Bianchi within $+1.29/-0.40\%$ (mean, 30 seeds); broadcast matches Ma and Chen [24] within 0.51%, while the naive reduction of the unicast model (dashed) under-predicts by $17.3\times$ at $N=50$.

TABLE VII

ON-AIR COST PER RECORD AGAINST PUBLISHED CLAS SCHEMES. CLAS FIGURES ARE READ FROM THE SCHEME’S OWN COMPARISON TABLE UNDER ITS OWN STATED PARAMETERS [27]; A 67 B TRAFFIC MESSAGE IS SUBTRACTED TO ISOLATE SECURITY OVERHEAD.

	total B/rec	security overhead
Wang <i>et al.</i>	859	792
Liang <i>et al.</i>	735	668
Xu <i>et al.</i>	596	529
Cahyadi <i>et al.</i> [27]	583	516
AUTHBC, $b=4$, cert every 5th frame	80.1	35.1
AUTHBC, $b=4$, cert every frame	112.5	67.5

cateless aggregate signature (CLAS) schemes for vehicular broadcast, which target the same shape of problem: many small, individually-attributable messages on a byte-constrained shared medium.

A correction we had to make first. Our byte model charged certificate bytes to *no* scheme, silently assuming out-of-band credential distribution. That assumption flatters public-key infrastructure and penalises certificateless designs, whose entire advertised advantage is carrying no certificate — so comparing without it would have decided the result in our favour before any measurement. We therefore charge certificates explicitly, using an ECDSA certificate of 162 B and the transmission policy of the deployed standard, one full certificate every fifth message [26].

The informative result is not the ratio. Every published CLAS overhead in Table VII is *linear in the number of messages*: the aggregate compresses the verifier’s work, not the wire, because each message still carries its own identity, verification key and signature components. Batching compresses the wire. **The two techniques operate on different axes**, which is the same distinction we drew for receiver-side batch verification [9], now with a measurement rather than an

argument.

What this does not establish. We do not claim to beat CLAS. Those schemes buy *conditional privacy* — a per-message pseudonymous identity that an authority can trace — which AUTHBC does not provide and a provenance ledger arguably does not want. Part of their overhead purchases a property we decline. Their group element is also 128 B against our 64 B signature, so some of the gap is curve and encoding choice rather than design. The defensible statement is narrower and more useful than a ratio: *on a byte-constrained broadcast link, aggregate signatures do not reduce airtime; placement and batching do.*

VI. BOUNDARY 1 — IMPOSSIBILITY: THE LOW-RATE REGIME

Everything so far concerns a companion-class 802.11 link. The natural question is how far the co-design carries, and the honest answer is that it stops — which is not a caveat but the most durable result in this paper. A capacity figure moves when the model improves; an exclusion does not.

This section is *analysis and simulation, not measurement*. No LoRa hardware was instrumented and no LoRa energy figure is reported: the only metered radio power in this work is a Wi-Fi figure, and reusing it would be fabrication. Every LoRa constant is transcribed from the SX1276 datasheet (Rev. 7, §4.1.1.5/§4.1.1.7) [28] and LoRaWAN RP002-1.0.3 [29] (Tables 8 and 13, EU868 duty cycle < 1%).

A. T6 excludes the four longest-range modes

With $H_f = 44$ B and a 64 B Ed25519 signature, Eq. (7) partitions EU868 (Table VIII). DR0–DR2 fail on the *signature alone*: 64 B does not fit a 51 B payload, so the exclusion holds even with a zero-byte header and a zero-byte record. The only escape is a smaller authentication object, and the smallest standardised one is a 48 B compressed BLS12-381 $\mathbb{G}_1$ point [30] at 126-bit security — which does fit 51 B, leaving three bytes for the header and the record together. DR3 fails on the encoding, and by six bytes. The $s_{\min}=13$ B it is measured against is the smallest record this design can emit: the 45 B delta record of Table II minus the 32 B chain link, once chaining moves to once-per-frame (Sec. VI-B). That is the most favourable value available to us, so DR3’s exclusion does not rest on a pessimistic choice — a leaner record would have to beat 13 B while remaining hash-chainable.

Which payload column, and why it decides DR3. Published EU868 tables differ: Klimiashvili *et al.* list DR3 at 123 B [31] where we use 115 B. Both read RP002-1.0.3 correctly — 123 is M , the maximum *MACPayload*, and 115 is N , the maximum *application* payload, the two differing by the 8 B FHDR and FPort. N is the applicable figure here, because our header, signature and record travel inside FRMPayload. **The distinction decides the verdict:** at $M=123$ the residual is 15 B and DR3 would be *feasible*; at $N=115$ it is 7 B and DR3 is excluded. We state it because the exclusion is this paper’s most durable claim, and a reader holding the other table would otherwise find it contradicted rather than explained.

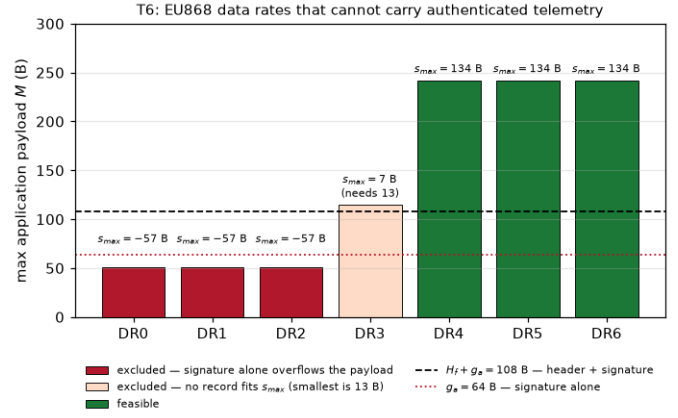


Fig. 6. Boundary 1. The payload-exclusion tiers across EU868 data rates at $H_f=44$ B measured and $g_s=64$ B. DR0–2 are excluded by the signature alone — no header design, encoding, batching or chaining reaches them — and DR3 misses on the record by six bytes. Only DR4–6 admit per-frame-verifiable telemetry. The boundary is arithmetic, so unlike the capacity results it does not move with the channel model.

TABLE VIII
T6 APPLIED TO EU868 ($H_f=44$ B MEASURED, $g_s=64$ B, $s_{\min}=13$ B).

DR	M (B)	$s_{\max}$	verdict
0, 1, 2	51	-57	excluded — signature alone overflows
3	115	7	excluded — no record fits (misses by 6 B)
4, 5, 6	242	134	feasible

B. Where the design changes: chaining

On 802.11 freshness binds, so the batch is fixed by $\Delta D_{\max}$ and saving payload bytes buys nothing extra. On LoRa the *regional payload limit* binds, so bytes convert directly into more records per frame. Moving the 32 B chain link from per-record to once-per-frame — the receiver re-derives the rest from $prev_hash_{i+1} = H(\text{record}_i)$, leaving the stored ledger byte-identical — raises the DR5 batch from 2 to 7 and the sustainable rate from 0.060 to 0.182 rec/s, a factor of 3.03. We adopt it *on this arm only*: the same change on 802.11 buys $\approx 6\%$ energy and no extra records, which does not pay for losing independently transmitted per-record tamper evidence.

C. Capacity: the two penalties compound

Time on air and the duty cycle are deterministic, so simulating them would be circular. One quantity is not derivable that way — how many nodes share the channel — because LoRaWAN uplinks are pure ALOHA, with no carrier sense and no acknowledgement. Simulating LoRaWAN scalability in ns-3 is established practice [32], including proposals to replace the ALOHA MAC with carrier sense [33] and recent extensions to non-terrestrial links [34].

A topology caveat, stated because it differs from the 802.11 arm. LoRaWAN is by specification a star-of-stars with no peer-to-peer mode: a recent FANET survey notes that it “presents some limitations regarding its star topology, its medium access control (MAC) layer and its lack of routing

procedures” [35], and published peer-to-peer LoRa meshes are built by discarding the LoRaWAN MAC entirely, “not relying on LoRaWAN... without the use of gateways” [36]. A LoRa FANET that was actually flown reports the same constraint — “LoRaWAN only supports star topology” — and hybrid LoRa/802.11s UAV meshes reach for a second radio for the same reason [37]; having built one, it converges on a *single channel* and on dedicated transmit and receive radios to work around half-duplex [38], which is the configuration we model. Nor is the gateway framing unrepresentative of the multi-hop literature: a review of mesh proposals for LoRa finds that even those pursuing flexible topologies retain “a predominant nodes → gateway/sink data flow”, with “fewer proposals” targeting genuinely decentralized architectures, and lists “network scalability with hundreds, or even thousands, of nodes” among the challenges that remain open [39]; concrete multi-hop LoRa deployments keep the same sink-directed shape [40], [41], and a 2025 ns-3 LoRa mesh study states plainly that “there is currently no standardised and commercialised multi-hop LoRa-based network” [42]. Our scenario is therefore N end devices reporting to one gateway, whereas the 802.11 arm is a genuine broadcast among peers. **The two arms bracket the design space rather than repeating one experiment at two data rates**, and the low-rate result should be read as the infrastructure-collected variant. What transfers is the part that matters: collision statistics at a receiver depend on how many transmitters are concurrently in range, not on what the receiver is attached to, so the measurement models a single receiver in an ad hoc network with $N+1$ nodes. It is also why the single-demodulator provisioning is the right one here and not, as it would be for a gateway, an artificially harsh one: *a UAV peer has one radio*. Two ad hoc effects remain outside the model. A half-duplex radio cannot receive during its own 364 ms frame, costing a peer $\approx 2\%$ of every other peer’s frames, a loss no gateway suffers — and not an artifact of our setup, since Class A devices are specified as half-duplex pure-ALOHA transceivers [35] and peer-to-peer LoRa implementations report designing around exactly this constraint [36]. And V is a *per-receiver* metric, as in the 802.11 arm: a record reaching *every* peer in a single broadcast has probability $\approx (1-p)^{N-1}$, so single-hop full replication is not what V measures and would require gossip or relay — an application-layer mechanism we do not study. Simulating the AUTHBC frame at DR5 under the same 0.95 threshold used for 802.11 — here applied to *measured* delivery V_{meas} , not to the assumed V_{tgt} of the byte model — gives $N_{\text{max}} = 3$, with a sharp cliff: delivery is 0.960 at $N=3$ and 0.917 at $N=5$. There is no backoff to absorb contention. We give this figure with its uncertainty, as we do on the 802.11 arm: bootstrapping the crossing over the 30 seeds puts it at 3 with a 95% interval of [2, 3], and at the certified $N=3$ the mean clears 0.95 while *nine of thirty* individual runs do not. Read per realisation the value is 1. The mean-based figure is the one quoted, for consistency with the 802.11 thresholds, but a deployment promising a reliability target should use the per-run reading.

Why DR5 and not DR6, and what DR6 would buy. Our

own exclusion table admits DR4, DR5 and DR6 equally — all three carry $N=242$ B and leave the same 134 B residual — and DR6 (SF7/250 kHz) runs at 11 kb/s against DR5’s 5 470, so the choice needs stating. *Capacity does not change*. At a fixed duty cycle d the transmissions falling inside one $2T_{\text{air}}$ vulnerability window number $N \cdot 2T_{\text{air}}/T_{\text{period}} = 2Nd$: **the airtime cancels**, so $P(\text{deliver}) = e^{-2(N-1)d}$ is rate-independent and N_{max} is the same at either rate. That closed form reproduces the measured DR5 run to within 0.9 percentage points across $N=2-10$ (exactly at $N=8$) and returns $N_{\text{max}} = 3$, matching the simulation. DR6 therefore doubles the aggregate to ≈ 0.99 rec/s *at the same three nodes*, and pays for it in link budget: -120 against -123 dBm is 3 dB, or $1.41\times$ less range under free-space spreading. Since range is the only reason to accept this data rate’s costs at all, we report DR5 and note DR6 as the throughput-preferring alternative.

We derive this rather than simulate it, and the reason is a limitation worth recording. The module’s sensitivity vectors are indexed by *spreading factor alone* — there is no bandwidth dimension in `EndDeviceLoraPhy::SENSITIVITY` or its gateway counterpart, and none in the interference helper. Forcing SF7 onto a 250 kHz channel would have returned DR6’s doubled bit rate while silently keeping DR5’s noise floor, so the 3 dB penalty — DR6’s entire cost — would have been invisible in a run that completed cleanly and repeated across all 30 seeds. We state the derivation and label it as one; it is weaker than a measurement.

This figure is far below the node counts usually quoted for LoRaWAN, and the discrepancy is configuration, not disagreement. We simulate the LoRa physical layer — real modulation, with the module’s measured interference and capture model — but on its harshest MAC provisioning: a single logical channel, a single gateway demodulation path, and one forced spreading factor, since the data rate is a design variable here and each run therefore fixes it. Comparison with measurement-based published results [43] must respect that. Both studies transmit at the 1% duty-cycle ceiling, so per-node occupancy is 1% in both and offered load scales identically as $G = 0.01N$; mapping their multi-channel result through their own fit $f_{\text{MCH,MSF}}(x) = f_{\text{SCH,SSF}}(x/18)$ places their $\approx 32\%$ loss at 56 nodes on one channel and one SF, where we measure $\approx 62\%$ at $N=50$. **Our model is therefore roughly $2\times$ more pessimistic than theirs, not more optimistic**, most plausibly because a single demodulation path rejects a second concurrent arrival outright instead of granting it the capture chance their measurements support. Our own configuration is deliberately the pessimistic one in a further respect: the interference matrix treats *any* same-spreading-factor overlap as fatal, so there is no capture at all, where a real LoRa receiver recovers the stronger of two colliding frames. Enabling a 6 dB capture threshold raises delivery by 2.7 points at $N=8$ and by $1.29\times$ at $N=50$ without moving N_{max} . The small margin over the Poisson curve e^{-2G} at low load is not capture but traffic regularity: sources are periodic rather than Poisson, for which the escape probability is $(1 - 2\tau/T)^{N-1} = 0.868$ at $N=8$ against 0.871 measured.

The result is also range-limited, and that limit binds before capacity does. Our channel model attributes all loss to collisions, and this is not an option we simply left switched off: enabling correlated shadowing changes the outcome on no row at either 500 or 1000 m. That is a property of the link budget, not a wiring error — with 14 dBm transmit power and the -130 dBm SF7 gateway sensitivity, log-distance path loss leaves 28.8 dB of margin at 500 m and 17.5 dB at 1000 m, which an ≈ 8 dB shadowing standard deviation cannot erode; simulated failure onset is near 4200 m, and shadowing does bite there (1.000 falls to 0.515 at 4000 m). *Our propagation parameters describe a considerably better link than a real drone-to-drone channel, and no option the scenario exposes closes that gap.* Field measurements of air-to-air LoRa on real drones [38] show a link losing frames to range alone: PDR falls from 0.9711 at 200 m to 0.9550 at 500 m and 0.9045 at 1000 m, measured with two drones and a base station, where contention is negligible. Since the two loss mechanisms are independent, delivery is $P_{\text{link}}(d) \times P_{\text{no-coll}}(N)$, and any range whose link PDR already misses the target makes it unreachable at *every* node count. Composing their measured link with our measured collision curve is sharper than either term alone:

V target	200 m	500 m	1000 m
0.95	1	1	0
0.90	3	3	1
0.85	5	5	3
0.80	10	8	5

At $V \geq 0.95$ the regime admits no multi-node network at all. The link alone delivers 0.9711 at 200 m, leaving 0.0039 of headroom, while our least-loaded measured point ($N=2$) already spends 0.0283 on collisions. A lone transmitter passes; two do not. The capacity figure is therefore conditional not only on range but on the threshold: relaxing to $V \geq 0.90$ restores $N_{\text{max}} = 3$, and to 0.85 restores 5. We report the curve rather than a point because the choice of threshold, not the physics, is what decides whether this regime is usable — and that choice belongs to the deployment, not to us. At the 1000 m radius our own scenario configures, an idealised channel is 9.6 percentage points optimistic; this mirrors the 802.11 arm, where the idealised model is 39% optimistic at 500 m.

$N_{\text{max}} = 3$ **should therefore be read as a worst-case bound at short range — one channel, one demodulator, one spreading factor, $d \leq 500$ m — rather than as a LoRaWAN network capacity. It also carries wide uncertainty.** Every device transmits on one exact period and ALOHA has no backoff, so relative phases are fixed for a whole run: a pair that collides once collides always. Delivery is consequently bimodal rather than noisy about a mean — over 30 seeds at $N=5$, 22 runs deliver exactly 1.000 and the rest fall to 0.20–0.84, giving a mean of 0.891 with $\sigma = 0.21$. A three-seed mean, which is what the figure above rests on, cannot characterise that distribution. At realistic ± 20 ppm crystal tolerance the accumulated drift over an hour (144 ms) is too small to break a 728 ms collision window, so the effect is

physical for a naive periodic sender; real LoRaWAN Class A devices randomise transmission timing precisely to avoid it, which the simulated sender does not model. We note that this distribution is invisible in a literature that does not report replication: of the four ns-3 LoRa simulation studies meeting our pre-registered inclusion criteria—including the foundational scalability analysis [32]—none states a seed count, a confidence interval or a standard deviation. The phenomenon itself is *not* unobserved: Durand and Booyesen attribute their own bimodal delivery to nodes that “always transmit on a specific SF, time, and channel”, producing “certain packet collisions being repeated for every transmission cycle” [42]. What is absent is any quantification of the resulting dispersion, or the replication information a reader would need to detect it. We report the figure with this caveat rather than restate it as a precise capacity. It is conservative in the direction that matters least for the claim being made: the point of this section is that the low-rate regime is qualitatively different, and a conservative bound does not manufacture that difference, it understates the margin. It is conservative in one further respect: LoRaWAN Class A specifies pure ALOHA [35] and we model it, whereas a purpose-built LoRa FANET adds listen-before-talk [38] and would collide less.

D. What infrastructure collection would buy

The single-demodulator, single-channel provisioning above models a UAV peer. The complementary question — what if a ground gateway collected the ledger instead? — is a configuration change, and we ran it: three channels and eight demodulation paths, the RP002 provisioning, with the same forced data rate. Delivery improves substantially and the improvement grows with load, reaching $1.90 \times$ at $N=50$ ($0.3755 \rightarrow 0.7134$) and still 0.5071 at $N=100$, which the peer configuration cannot reach at all. **Yet N_{max} moves only from 3 to 8 (95% CI [5, 8]; the bare value must not be quoted).** The $V \geq 0.95$ criterion sits on a near-vertical part of the delivery curve — the gateway passes at $N=8$ with 0.9526 and fails at $N=10$ with 0.9398 — so a threefold reduction in offered load per channel shifts the threshold barely at all. This is the same duality the 802.11 arm shows between saturation and the measured verifiability boundary: *a capacity metric and a strict-reliability metric respond very differently to the same change*, and reporting either alone would mislead.

E. An external check on the low-rate capacity

The 802.11 arm is validated against two published analytical models. The low-rate arm rested on a single simulator, so we gave it the same treatment. Bor *et al.* [43] publish their capacity result in closed form — a quintic fitted at $R^2 = 0.997$ to *total* packet loss (collisions plus wrong-payload-CRC) measured on SX1301 hardware — which means it can be *evaluated at our operating point* rather than quoted at theirs. We implemented it, validated the implementation against the four loss figures their own text states (three land within ≈ 3 points; the fourth is stated as collisions-only, so our total

TABLE IX
THE LOW-RATE CAPACITY, BY TWO INDEPENDENT METHODS.

N	AUTHBC (NS-3)	Bor <i>et al.</i>	
2	2.8%	3.1%	we are more optimistic
3	4.0%	3.8%	crossover
5	8.3%	5.1%	we are $1.64\times$ more pessimistic
8	12.9%	7.0%	we are $1.85\times$ more pessimistic
30	43.0%	19.9%	we are $2.16\times$ more pessimistic
50	62.5%	29.9%	we are $2.09\times$ more pessimistic
$N_{\max}$ at $V \geq 0.95$			
	3	4	

TABLE X
THE LOW-RATE REGIME IS NOT A SLOWER VERSION OF THE SAME PROBLEM.

	per node	$N_{\max}$	aggregate
802.11a, delta/B, $b=4$	20 rec/s	103	2060 rec/s
LoRa EU868 DR5, $b=6$	0.165 rec/s	3	0.495 rec/s
ratio	$121\times$	$34\times$	$\approx 4200\times$

correctly exceeds it), and applied the identical $V \geq 0.95$ criterion.

A discrete-event simulation of the LoRa physical layer and a polynomial fitted to hardware interference measurements land **one node apart** on the quantity this section rests on (Table IX). The agreement should not be over-read — below $N \approx 10$ their fit is dominated by a 1.78% intercept that is an artifact rather than a measurement — but it is obtained independently and it is the right order. The disagreement in *shape* is the more informative part, and it matches the configuration difference: our runs model no capture at all and a single demodulation path, where their measurement-based model grants both, so beyond the crossover at $N \approx 3$ we reject concurrent arrivals that their gateway would still recover.

The arm is $\approx 120\times$ slower per node and $\approx 34\times$ smaller per domain, and it is the product that matters (Table X). LoRa is not a slow 802.11; it is a different regime, in which authenticated per-record telemetry is not the right application at all. Its defensible role is long-range *provenance* — a tamper-evident trickle — not live telemetry. An independent ns-3 comparison of the two technologies reaches the same structural conclusion from a different direction: Klimiashvili *et al.* find neither uniformly better, with WiFi ad hoc winning on delay at every file size while it remains single-hop and LoRa winning on energy only where WiFi has degraded into a multi-hop route, and they recommend *selecting between* the two rather than tuning one [31]. **We take that agreement as qualitative only.** Their headline ratio — WiFi’s theoretical throughput “almost 5000 times” LoRa’s — is a *PHY bit-rate* comparison (against DR6’s 11 kb/s) carrying no duty cycle, framing or authentication, whereas our $\approx 4200\times$ is an application-level aggregate of authenticated records per second across a domain. The two are close in magnitude and are *not* the same quantity, so we do not offer either as confirming the other.

One caveat of provenance. The simulator enforces RP002

Table 12 (repeater-compatible, 222 B) while our analytical model uses Table 13 (non-repeater, 242 B); at DR5 that caps the batch at 6 rather than 7. Both are defensible readings of the same standard, and we simulate what the implementation accepts rather than reconcile them silently.

VII. REPRODUCIBILITY AND SCIENTIFIC INTEGRITY

A simulator artifact large enough to change what a reader should believe. The ns-3 LoRaWAN module’s periodic sender fires on an exact interval, and LoRaWAN ALOHA has no backoff, so relative transmission phases are frozen for an entire run: a pair that collides once collides on every cycle. Delivery becomes *bimodal* rather than noisy about a mean. Over 30 seeds at $N=5$, 22 runs deliver exactly 1.000 and the rest fall to 0.20–0.84. We measure the consequence: the coefficient of variation is inflated **2–8** $\times$ relative to a sender with one-second transmission jitter, the inflation growing with node count ($2.9\times$ at $N=5$, $7.9\times$ at $N=100$). Real LoRaWAN Class A devices are required to randomise transmission timing; the module does not.

We claim the measurement, not the observation. Durand and Booyesen report the same effect in their own results, attributing bimodal delivery to nodes that “always transmit on a specific SF, time, and channel”, producing “certain packet collisions being repeated for every transmission cycle” [42]. What appears to be absent from the literature is any *quantification* of the resulting dispersion. Of the *five* ns-3 LoRa simulation studies now meeting our pre-registered inclusion criteria, four state no seed count, confidence interval or standard deviation that would let a reader detect it. **The fifth does:** Klimiashvili *et al.* average every reported result over “50 independent runs over channel realization and nodes’ position” [31]. We report that as a count and not a percentage, because five papers cannot support one: the protocol targeted 56, the achieved n is 5, and a single counter-example moves the estimate from 0% to 20%. What this supports is the weak claim — that a reader of this literature frequently *cannot* tell — not a quantitative claim about how often. That is why every capacity figure in this paper is reported at 30 seeds with its distribution, and why a threshold crossing is given as an interval: at $N=3$ the mean clears $V \geq 0.95$ while nine of thirty individual runs do not.

The survey protocol was committed to version control *before* the corpus was assembled, and the sweep is reproducible (make survey-direction-c). Papers whose text will not extract are excluded from the denominator rather than scored as reporting nothing: one held PDF yields five characters, and counting it as evidence would manufacture support for our own hypothesis.

Beyond the results, the project’s second product is its discipline. Anomalies were root-caused, not patched over: a stateful delta codec used statelessly (60→45 B); string-keyed CBOR replaced by canonical arrays (110→66 B); the BLS size corrected 48→96 B (with the T4 model updated); and, on the broadcast channel, three successive explanations retracted in writing—an “ $18\times$ capture” over-claim, then the capture

effect itself (PHY instrumentation measured it at 0%), and finally our own claim to have discovered the responsible mechanism, which a literature check showed had been published in 2007 [21]. A whole-repo audit re-derived every formula against the code and hand-checked one point per experiment. Finally, freezing raw data risks *silent staleness*, so an automated gate re-derives every deterministic frozen artifact from the current code and fails on any drift—verified to catch the exact regression it was built for. No result is fabricated, no test skipped, no tolerance widened.

VIII. LIMITATIONS AND FUTURE WORK

Post-quantum signatures: a projection, not a contribution. Practical PQ authentication for vehicular broadcast is already solved at NDSS level [26] and for 5G broadcast [44]; we claim nothing there. But the substitution is mechanical in our model, so we report it rather than leave a foreseeable question unanswered. Taking sizes from those sources—ML-DSA/Dilithium2 at 2420 B and SPHINCS+ at 7856 B per signature—and holding the adopted operating point, bytes/record at $b=4$ move from 72.0 B (Ed25519) to 661.0 B ($9.2\times$) and 2020.0 B ($28.1\times$).

The binding problem is not the ratio, it is that batching cannot rescue it. Two of our own constraints collide. Freshness caps the batch at $b \leq \lfloor \Delta D_{\max} \rfloor = 5$, so there is almost nothing to amortize a kilobyte-scale signature over: reaching Ed25519’s 27 B/record of overhead would need $b=91$ for ML-DSA, a 1.83 s fill— $18\times$ the 100 ms deadline. And the MTU binds harder still: an ML-DSA signature plus the 44 B header is 2464 B, which *exceeds the 1500 B MTU on its own*, so placement B stops fitting in a single frame at *any* batch size. That is precisely why [26] needs a fragmentation design ($\beta=4$ frames for Dilithium, 8 for SPHINCS+ in their Table III) rather than a larger batch. Fragmenting authenticated payloads is itself a security surface in constrained networks [45], so the change is not only a byte-accounting one. PQ identity-based signatures with aggregation are being proposed for fog-enabled FANETs specifically [46]; that line optimises signing and verification cost, which is complementary to the wire-byte constraint that binds here. The honest conclusion is that AUTHBC’s amortization argument does not survive the transition unchanged: a PQ variant would be a different design, not a re-parameterisation, and the placement axis would have to be re-derived against fragmentation rather than against the MTU.

The 802.11 and LoRa arms are evaluated separately and are not combined into a single heterogeneous scenario; a gateway-relayed hybrid is future work. Energy is now measured on a Raspberry Pi 4 with INA219 meters ($P_{\text{cpu}} = 0.634$ W, $P_{\text{radio}} = 0.218$ W—both nominal values were $3\text{--}5\times$ too high), and the byte-based headline is power-free either way. The energy model is *composed* from separately measured powers and timings, so we metered the composition end-to-end on four configurations. It was initially $\approx 32\%$ low; both causes were identified and corrected—an omitted per-record chain-hash term (SHA-256, 2745.5 ns measured on ARM, charged

twice per record and not amortized over b), and a P_{cpu} measured over *isolated* primitives (0.634 W) that understates any composed pipeline by 18.2% (four configurations meter 0.732–0.760 W, a 3.8% spread, so a single constant remains appropriate; we adopt 0.749 W). The residual is $+7.5$ to $+14.3\%$ and is entirely frame assembly between crypto calls, which we deliberately do not charge because it is interpreter overhead of a prototype rather than a property of the design. Absolute energy figures should therefore be read as lower bounds by $\approx 10\text{--}14\%$; byte results are power-free. The channel models are validated only in the idealised single-collision-domain regime they describe: a spread, mobile formation introduces spatial reuse and, at long range, hidden terminals that neither model represents. We bound this: sweeping a realistic air-to-air scenario (Friis, 3D cluster, Nakagami fading) shows the idealised model is a *conservative* lower bound up to a $\approx 300\text{--}400$ m cluster — a boundary an independent ns-3 study corroborates from the other side, finding that a WiFi ad hoc network spanning 300 m already needs four hops in a linear topology and 21 nodes in a random one [31], i.e. it has stopped being one collision domain at precisely the range our own sweep flags — (goodput $+42$ to $+51\%$ from spatial reuse) but becomes *optimistic* by 39% at 500 m, where links break down; Rayleigh fading ($m=1$) costs a further 27 points. These two marginal-link figures moved substantially when we migrated NS-3 3.41 $\rightarrow$ 3.48 (from 15.7% and 9 points), while every near-field scenario moved under 2% — consistent with that release’s InterferenceHelper and WifiPhy fixes, which bite hardest at marginal SNR. We report the newer simulator’s figures. **The hardware validation is two-node, with a single transmitter, so it involves zero contention and therefore does not validate Bianchi or Ma & Chen.** What it validates is the 802.11a timing constants those models are built on, and the link loss; the contention models themselves remain simulation-validated only. On ARM the scheme tie breaks toward Ed25519 rather than ECDSA, with an identical auth-byte cut.

IX. CONCLUSION

Authentication overhead dominates tiny UAV telemetry, and the useful question is not how much of it a scheme removes but **which configurations can run at all**. We answered that as three boundaries. The first is an *impossibility*: a link whose payload cannot hold one header, one signature and one record carries no per-frame-verifiable telemetry at any encoding or batch size, excluding four of seven EU868 data rates. The second is *capacity*: above that floor the medium binds, and the co-design sustains $1.9\text{--}3.2\times$ the neighbourhood of an inline baseline on an NS-3-validated channel whose airtime we confirmed on hardware to 0.36%. The third is what running costs: 58.7% fewer on-air bytes at a 3GPP TS 22.125-compliant operating point, meeting a criterion committed to version control before the result existed.

We are deliberate about where that result comes from. The authentication component, taken alone, reduces to $1 - 1/b$: the header and signature sizes cancel, and neither the encoding

nor the scheme appears. Reported as a headline percentage it would overstate what four coupled axes contribute. The contribution that genuinely requires the coupling is *feasibility*—which configurations can run at all. Joining the byte model to the channel model shows the inline baselines exhaust a single collision domain at 25–32 neighbours while the co-designed configuration reaches 103. We resist rounding that to “ $\approx 3\times$ ”: against the CBOR baseline it is $3.22\times$ at saturation but $2.42\times$ at the measured verifiability boundary, and quoting one figure for both would repeat the error Sec. V warns against. The advantage is robust in existence ($> 1.9\times$ under every threshold and criterion we tested) and variable in size.

Pushed to its limit, the same coupling yields an exclusion result that we regard as the more durable contribution. A link whose payload cannot hold one header, one signature and one record carries no per-frame-verifiable telemetry at any encoding or batch size, which removes the four longest-range LoRa modes outright; loss makes fragmentation no escape, since a unit spanning n frames verifies with probability $(1-p)^n$ and the target is already spent at $n=1$ whenever $\epsilon \leq p$. It is not escapable by better cryptography, and it is not visible to a byte model alone. Capacity, by contrast, turned out to constrain rather than exclude: simulation shows the channel still delivering 98.9% of frames at nominal saturation load, so adopting the 100 ms bound of 3GPP TS 22.125 [1] costs swarm size— $N \leq 100$ instead of $N \leq 213$ —and nothing in bytes, provided the telemetry rate is high enough for the batch to fill inside the deadline. An NS-3-validated channel model and an automated reproducibility gate keep the study honest and repeatable.

REFERENCES

- [1] 3GPP, “Unmanned aerial system (UAS) support in 3GPP,” 3rd Generation Partnership Project, Technical Specification TS 22.125, Apr. 2022, published as ETSI TS 122 125 V17.6.0. Direct UAV-to-UAV local broadcast: R-5.2.2-008 payload 50–1500 B *excluding security-related components*, R-5.2.2-010 ≥ 10 messages/s, R-5.2.2-011 end-to-end latency ≤ 100 ms. C2 KPIs: Table 7.2-1.
- [2] C. Gündoğan, C. Amsüss, T. C. Schmidt, and M. Wählisch, “Reliable firmware updates for the information-centric internet of things,” in *Proc. 8th ACM Conf. on Information-Centric Networking (ICN)*. ACM, 2021, computes the payload remaining after MTU minus headers minus signature for 802.15.4/NDN: 55 B of headers leave 73 B, and a 64 B Ed25519 signature reduces application data to 9 B. Prior art for the AUTHBC exclusion threshold.
- [3] National Institute of Standards and Technology, “Digital signature standard (DSS),” NIST, FIPS PUB 186-5, 2023.
- [4] D. J. Bernstein, N. Duif, T. Lange, P. Schwabe, and B.-Y. Yang, “High-speed high-security signatures,” in *Cryptographic Hardware and Embedded Systems — CHES 2011*, ser. LNCS, vol. 6917. Springer, 2011, pp. 124–142.
- [5] S. Josefsson and I. Liusvaara, “Edwards-curve digital signature algorithm (EdDSA),” IETF, RFC 8032, 2017.
- [6] D. Boneh, B. Lynn, and H. Shacham, “Short signatures from the Weil pairing,” in *Advances in Cryptology — ASIACRYPT 2001*, ser. LNCS, vol. 2248. Springer, 2001, pp. 514–532.
- [7] D. Boneh, C. Gentry, B. Lynn, and H. Shacham, “Aggregate and verifiably encrypted signatures from bilinear maps,” in *Advances in Cryptology — EUROCRYPT 2003*, ser. LNCS, vol. 2656. Springer, 2003, pp. 416–432.
- [8] R. Rotta and P. Mykytyn, “Secure multi-hop telemetry broadcasts for UAV swarm communication,” 2024, arXiv:2401.11915.
- [9] C. Zhang, R. Lu, X. Lin, P.-H. Ho, and X. Shen, “An efficient identity-based batch verification scheme for vehicular sensor networks,” in *IEEE INFOCOM 2008 — The 27th Conference on Computer Communications*, 2008, pp. 246–250.
- [10] S. Nakamoto, “Bitcoin: A peer-to-peer electronic cash system,” <https://bitcoin.org/bitcoin.pdf>, 2008.
- [11] X. Chen, J. Tang, and S. Lao, “Review of unmanned aerial vehicle swarm communication architectures and routing protocols,” *Applied Sciences*, vol. 10, no. 10, p. 3661, 2020.
- [12] D. Bhatt, S. Penumatsa, and V. Kumar, “Hybrid MAC protocol with integrated multi-layered security for resource-constrained UAV swarm communications,” *arXiv preprint arXiv:2510.10236*, 2025.
- [13] P. Mehta, R. Gupta, and S. Tanwar, “Blockchain envisioned UAV networks: Challenges, solutions, and comparisons,” *Computer Communications*, vol. 151, pp. 518–538, 2020.
- [14] C. Bormann and P. Hoffman, “Concise binary object representation (CBOR),” IETF, RFC 8949, 2020.
- [15] S. Furuhashi, “MessagePack: Efficient binary serialization format,” <https://msgpack.org>, 2008.
- [16] T. Pelkonen, S. Franklin, J. Teller, P. Cavallaro, Q. Huang, J. Meza, and K. Veeraraghavan, “Gorilla: A fast, scalable, in-memory time series database,” *Proceedings of the VLDB Endowment*, vol. 8, no. 12, pp. 1816–1827, 2015.
- [17] G. Bianchi, “Performance analysis of the IEEE 802.11 distributed coordination function,” *IEEE Journal on Selected Areas in Communications*, vol. 18, no. 3, pp. 535–547, 2000.
- [18] ns-3 Consortium, “ns-3 network simulator (v3.41),” <https://www.nsnam.org>, 2024.
- [19] J. Veera, M. Jain, K. Moy, and A. Ranganathan, “TBRD: TESLA authenticated UAS broadcast remote ID,” 2025, tESLA-based broadcast authentication for UAS Remote ID: 32 B keychain entries, reports a 50% reduction in authentication overhead versus digital signatures and 100x lower computation, at the cost of delayed verification.
- [20] A. Perrig, R. Canetti, J. D. Tygar, and D. Song, “The TESLA broadcast authentication protocol,” *RSA CryptoBytes*, vol. 5, no. 2, pp. 2–13, 2002, delayed key disclosure: a MAC now, its key later. Trades verification latency for per-message bytes.
- [21] X. Ma and X. Chen, “Saturation performance of IEEE 802.11 broadcast networks,” *IEEE Communications Letters*, vol. 11, no. 8, pp. 686–688, Aug. 2007.
- [22] PX4 Development Team, “PX4-Autopilot: mavlink_main.cpp, configure_streams_to_default,” Source code, <https://github.com/PX4/PX4-Autopilot>, 2026, gLOBAL_POSITION_INT stream rates by MAVLINK_MODE: NORMAL 5 Hz, OSD 10 Hz, CONFIG 10 Hz, ONBOARD 50 Hz, LOW_BANDWIDTH 2 Hz, SYS_STATUS: NORMAL 1 Hz, ONBOARD 5 Hz. Verified 2026-07-29.
- [23] ArduPilot Development Team, “ArduPilot: GCS_MAVLink_Parameters.cpp, default_rates[],” Source code, <https://github.com/ArduPilot/ardupilot>, 2026, sRx_POSITION default is vehicle-specific: Plane and Rover 1 Hz, Sub 3 Hz, Copter/Heli/Blimp 0 Hz (streams requested on demand by the GCS). Range 0–50 Hz. Verified 2026-07-29.
- [24] X. Ma and X. Chen, “Performance analysis of IEEE 802.11 broadcast scheme in ad hoc wireless LANs,” *IEEE Transactions on Vehicular Technology*, vol. 57, no. 6, pp. 3757–3768, Nov. 2008.
- [25] I. Tinnirello, G. Bianchi, and Y. Xiao, “Refinements on IEEE 802.11 distributed coordination function modeling approaches,” *IEEE Transactions on Vehicular Technology*, vol. 59, no. 3, pp. 1055–1067, Mar. 2010.
- [26] G. Twardokus, N. Bindel, H. Rahbari, and S. McCarthy, “Practical post-quantum authentication for vehicle-to-vehicle communications,” in *Network and Distributed System Security Symposium (NDSS)*, 2024.
- [27] Z. Xu, M. Luo, M. K. Khan, and K.-K. R. Choo, “A certificateless aggregate signature scheme for VANETs with privacy protection properties,” *PLOS ONE*, vol. 20, no. 2, p. e0317047, 2025.
- [28] Semtech Corporation, “SX1276/77/78/79 low power long range transceiver datasheet,” Semtech Corporation, Datasheet DS.SX1276-7-8-9.WAPP, May 2020, time on air: Sec. 4.1.1.7, p. 32.
- [29] LoRa Alliance, “RP002-1.0.3 LoRaWAN regional parameters,” LoRa Alliance, Technical Specification RP002-1.0.3, 2021, eU863-870: Table 8 (data rates), Table 13 (max payload), duty cycle $\leq 1\%$.
- [30] D. Boneh, S. Gorbunov, R. S. Wahby, H. Wee, C. A. Wood, and Z. Zhang, “BLS signatures,” IRTF Crypto Forum Research Group, Internet-Draft draft-irtf-cfrg-bls-signature-05, Jun. 2022, bLS12-381 tar-

gets 126-bit security. minimal-signature-size: 48 B signature (G1) with 96 B public key (G2); minimal-pubkey-size: 96 B signature (G2) with 48 B public key (G1) — the variant blspy implements.

- [31] G. Klimiashvili, C. Tapparello, and W. Heinzelman, “LoRa vs. WiFi ad hoc: A performance analysis and comparison,” in *2020 International Conference on Computing, Networking and Communications (ICNC)*, 2020, pp. 654–660.
- [32] F. Van den Abeele, J. Haxhibeqiri, I. Moerman, and J. Hoebeke, “Scalability analysis of large-scale LoRaWAN networks in ns-3,” *IEEE Internet of Things Journal*, vol. 4, no. 6, pp. 2186–2198, 2017.
- [33] T.-H. To and A. Duda, “Simulation of LoRa in NS-3: Improving LoRa performance with CSMA,” in *IEEE International Conference on Communications (ICC)*, 2018, hAL hal-01835883.
- [34] A. Traspadini, M. Zorzi, and M. Giordani, “Performance evaluation of LoRa for IoT applications in non-terrestrial networks via ns-3,” in *IEEE*, 2025, arXiv:2509.02811.
- [35] W. D. Paredes, H. Kaushal, I. Vakilinia, and Z. Prodanoff, “LoRa technology in flying ad hoc networks: A survey of challenges and open issues,” *Sensors*, vol. 23, no. 5, p. 2403, 2023.
- [36] R. Berto, P. Napoletano, and M. Savi, “A LoRa-based mesh network for peer-to-peer long-range communication,” *Sensors*, vol. 21, no. 13, p. 4314, 2021.
- [37] L. Davoli, E. Pagliari, and G. Ferrari, “Hybrid LoRa-IEEE 802.11s opportunistic mesh networking for flexible UAV swarming,” *Drones*, vol. 5, no. 2, p. 26, 2021.
- [38] Q. Zarak, D. Shashev, and S. Shidlovskiy, “Swarm of drones using LoRa flying ad-hoc network,” in *2021 International Conference on Information Technology (ICIT)*, 2021, pp. 400–405.
- [39] R. P. Centelles, F. Freitag, R. Meseguer, and L. Navarro, “Beyond the star of stars: An introduction to multihop and mesh for LoRa and LoRaWAN,” *IEEE Pervasive Computing*, vol. 20, no. 2, pp. 63–72, 2021.
- [40] A. Abrardo and A. Pozzebon, “A multi-hop LoRa linear sensor network for the monitoring of underground environments: The case of the medieval aqueducts in siena, italy,” *Sensors*, vol. 19, no. 2, p. 402, 2019.
- [41] X. Jiang, H. Zhang, E. A. Barsallo Yi, N. Raghunathan, C. Mousoulis, S. Chaterji, D. Peroulis, A. Shakouri, and S. Bagchi, “Hybrid low-power wide-area mesh network for IoT applications,” *IEEE Internet of Things Journal*, 2020.
- [42] T. G. Durand and M. J. Booyesen, “Performance evaluation of a mesh-topology LoRa network,” *Sensors*, vol. 25, no. 5, p. 1602, 2025.
- [43] M. Bor, U. Roedig, T. Voigt, and J. M. Alonso, “LoRa scalability: A simulation model based on interference measurements,” *Sensors*, vol. 17, no. 6, p. 1193, 2017.
- [44] S. Darzi, M. M. Rahman, I. Karim, R. Behnia, A. A. Yavuz, and E. Bertino, “Future-proofing authentication against insecure bootstrapping for 5G networks: Feasibility, resiliency, and accountability,” *arXiv preprint arXiv:2510.23457*, 2025, pDF held in docs/literature/; source of the ML-DSA 2420 B and SPHINCS+ 7856 B signature sizes quoted in the PQ projection.
- [45] S. Sobati-Moghadam, “Predictive-CSM: Lightweight fragment security for 6LoWPAN IoT networks,” *arXiv preprint arXiv:2506.01767*, 2025.
- [46] S. Al majmaie, G. Ghajari, N. P. Bhatta, and F. Amsaad, “Blockchain-driven AI-enhanced post-quantum multivariate identity-based signature and privacy-preserving data aggregation scheme for fog-enabled flying ad-hoc networks,” *arXiv preprint arXiv:2604.18819*, 2026.