

Human-Robot Affordance Dataset Annotation Pipeline

Section 1 Environment install

1. Install Anaconda:

<https://www.anaconda.com/download>

2. Create and activate a new conda environment:

```
conda create -n affordance python=3.10
```

```
conda activate affordance
```

3. Install required packages:

```
pip install h5py opencv-python numpy matplotlib
```

4. Install Git LFS:

```
conda install -c conda-forge git-lfs
```

```
git lfs install
```

```
HumanAndRobot — -zsh — 80x24
(9991) steven@StevendeMacBook-Pro HumanAndRobot % conda install -c conda-forge git-lfs
Channels:
 - conda-forge
 - defaults
Platform: osx-64
Collecting package metadata (repodata.json): done
Solving environment: done

## Package Plan ##

  environment location: /opt/anaconda3/envs/9991

  added / updated specs:
    - git-lfs

The following NEW packages will be INSTALLED:

  git-lfs                conda-forge/osx-64::git-lfs-3.7.1-h990441c_1

The following packages will be UPDATED:

  ca-certificates        pkgs/main/osx-64::ca-certificates-202~ --> conda-forge/noar
```

5. Clone the Human2Robot dataset repository without downloading the full dataset:

```
GIT_LFS_SKIP_SMUDGE=1 git clone
```

<https://huggingface.co/datasets/dannyXSC/HumanAndRobot>

6. Enter the repository:

```
cd HumanAndRobot, Loop 7 and 8.
```

7. Download only selected episodes (example):

```
git lfs pull --include="data/v0/grab_cube/episode_0.hdf5"
```

Do NOT run “git lfs pull” without “--include”, otherwise the full dataset (~233GB) may start downloading.

8. Extract paired human-robot frames:


```
python extract_frames.py \
```

```
--file_path data/v0/grab_cube/episode_0.hdf5 \
```

```
--output_dir grab_cube/frames_ep0
```

```
HumanAndRobot — -zsh — 80x11
(9991) steven@StevendeMacBook-Pro HumanAndRobot % git lfs pull --include="data/v0/grab_cube/episode_1.hdf5"
(9991) steven@StevendeMacBook-Pro HumanAndRobot % python extract_frames.py \
--file_path data/v0/grab_cube/episode_1.hdf5 \
--output_dir frames_ep1
num frames: 366
Frames saved to: frames_ep1
```

Section 2 Annotate contact points

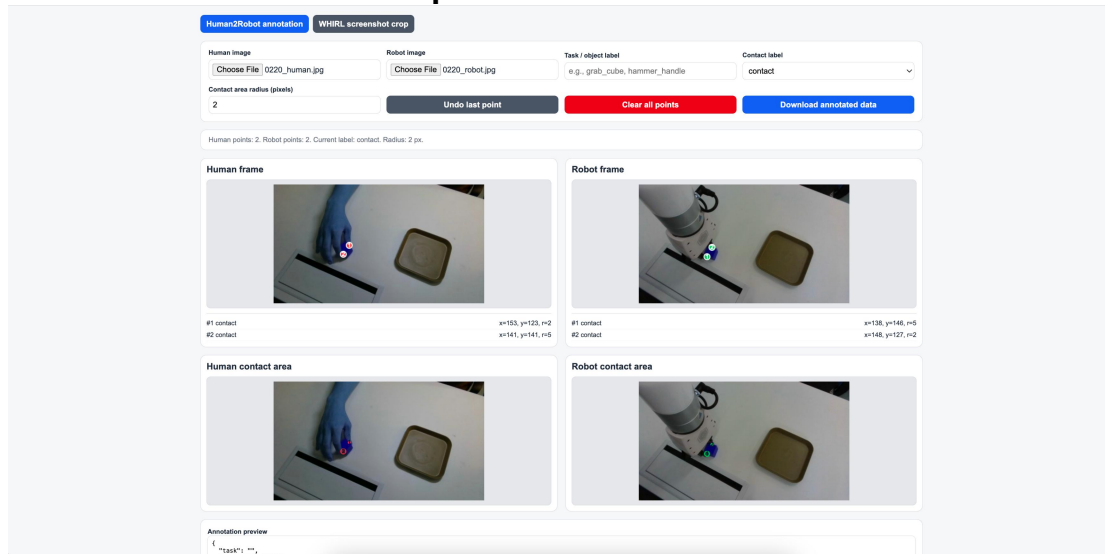

9. Open “contact_annotation_tool.html” in a browser.

10. Load one paired human image and robot image into the annotation tool.

11. Annotate:

- human finger/object contact point
- corresponding robot gripper/object contact point
- test different area radius and choose the best match

The annotation should represent the same affordance semantics between human and robot interaction.

Do not annotate an occluded contact point by guessing. Do not force every grasp to have two points. One clear visible contact point is better than two noisy points.

For an edge contact point, annotate it. And set the radius=[1, 3].

Example:

human grasps hammer handle ↔ robot gripper grasps hammer handle

12. Export:

- Click “Download annotated data”

13. Annotation guidelines:

- use representative key frames only
- avoid blurred frames
- prefer clear contact interactions
- keep annotation consistent across tasks
- preserve original image filenames
- coordinates are stored in original image pixel coordinates

14. Key frames we need:

- (1) start
- (2) pre-contact / approach
- (3) first contact
- (4) movement 1
- (5) movement 2
- (6) placement
- (7) release