

F13-HF-014

F13-SW-014
415V MCC ACTIVE
HARMONIC FILTER
200 A

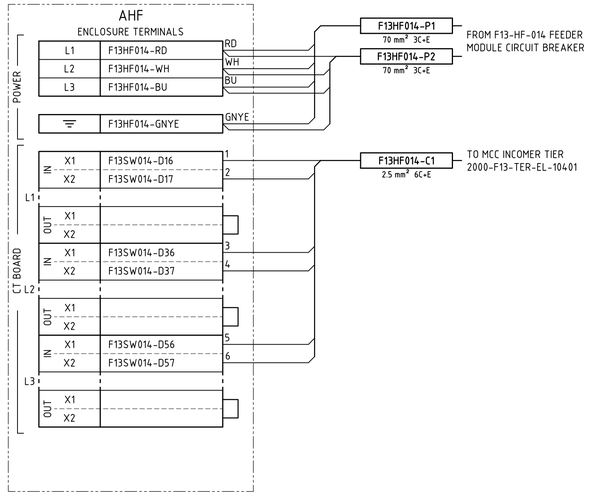





NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F13HF014-1200, UNLESS OTHERWISE NOTED.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. P1 & P2 PORTS ARE FACTORY FITTED WITH RJ45 TERMINATOR.
5. NHP TDGC2
   IN:170A IΔN MIN:0.05A TOROID TO SUIT CABLE DIAMETER.
6. EARTH LEAKAGE RELAY (ELV) USER INTERFACE TO BE MOUNTED ON MCC MODULE DOOR. RELAY ENERGISED (NORMALLY CLOSED CONTACT OPEN) IN NORMAL OPERATION.

LEGEND



TERMINATION LEGEND

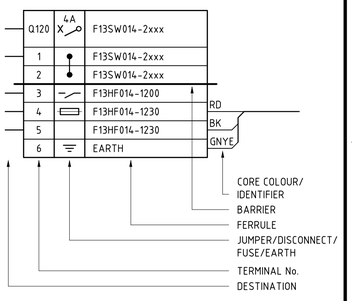

2000-F13-SCM-EL-10445_Rev2

F13-SW-014 F13-HF-014 active harmonic filter - schematic and termination diagram