ELF 5/31

Standard Appearance

STRIX-GTX1080-08G-GAMING








STRIX-GTX1080-8G-GAMING





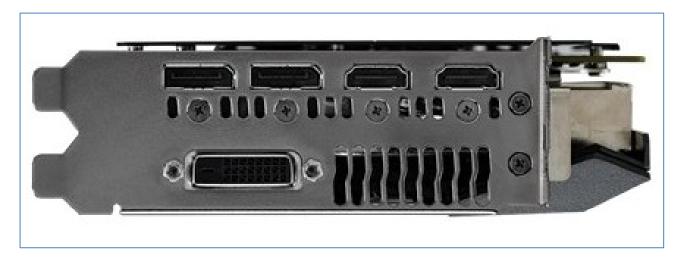

STRIX-GTX1080-A8G-GAMING








STRIX-GTX1080-A8G-CORE









BLOCK DIAGRAM

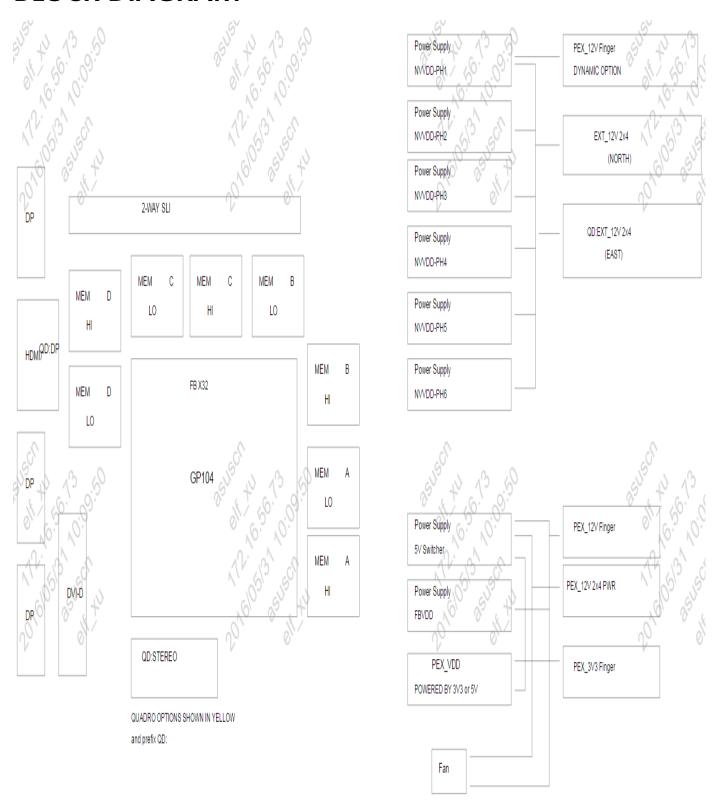


POWER FLOW

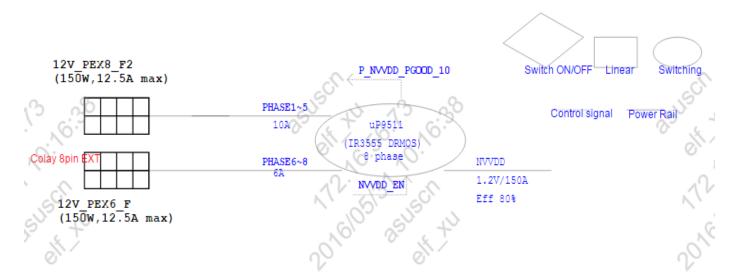

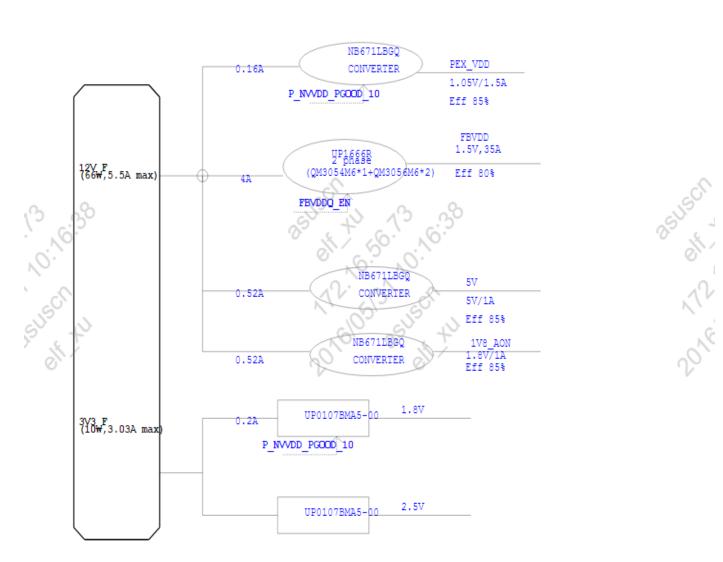


VOLTAGE MEASURE POINT

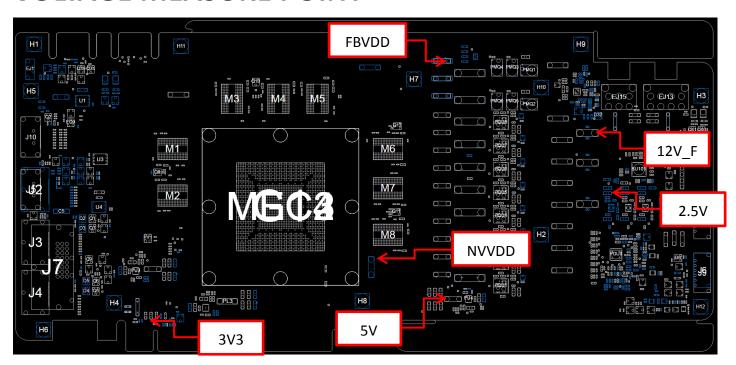

BGA REFLOW PROFILE

| Setpoints (Ce | Setpoints (Celsius) | | | | | | | | | |
|------------------------------|---------------------|-------|-----|-----|-----|-----|-----|-----|-----|-----|
| Zone | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Top | 100 | 125 | 150 | 170 | 190 | 215 | 235 | 250 | 255 | 200 |
| Bottom | 100 | 125 | 150 | 170 | 190 | 215 | 235 | 250 | 255 | 200 |
| Conveyor Speed (inch/min): | | 26.00 | | | | | | | | |

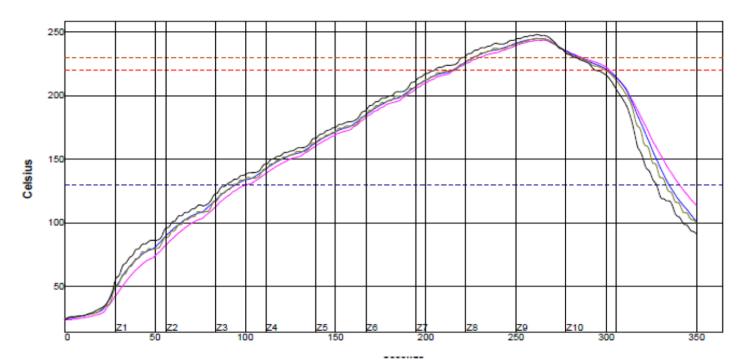

| PWI= 95% | Max Ricing Slope | | Max Falling Slope | | Preheat 130-220C | | Reflow Time /220C | | Peak Temp | | Tot Time /230C | |
|------------|------------------|------|-------------------|------|------------------|-----|-------------------|-----|-----------|-----|----------------|-----|
| U4 CEN - 1 | 1.80 | -28% | -2.69 | 18% | 115.35 | 71% | 86.97 | 84% | 243.84 | 38% | 67.38 | 43% |
| M2 - 1 | 2.07 | -17% | -3.28 | -13% | 120.00 | 78% | 86.84 | 83% | 245.08 | 51% | 68.78 | 47% |
| J7 - 2 | 2,16 | -14% | -3.41 | -21% | 121.51 | 80% | 84.73 | 78% | 245.34 | 53% | 68.12 | 45% |
| L7 - 2 | 2.35 | -8% | -3.76 | -38% | 115.18 | 71% | 89.37 | 95% | 248.28 | 83% | 63,36 | 68% |
| Delfa | 0.66 | | 1.08 | | 8.35 | | 4.85 | | 4.44 | | 8.00 | |