# ROG-STRIX-GTX1650S-4G-GAMING (CG161PIS2) Repair Guide

## **Model List**

Model name	60PN	GPU	Date		
ROG-STRIX-GTX1650S-	YV0E12	CG161PIS2	2019/12/9		
4G-GAMING					


#### **STANDARD APPEARANCE**

### **ROG-STRIX-GTX1650S-4G-GAMING**







## **BLOCK DIAGRAM**

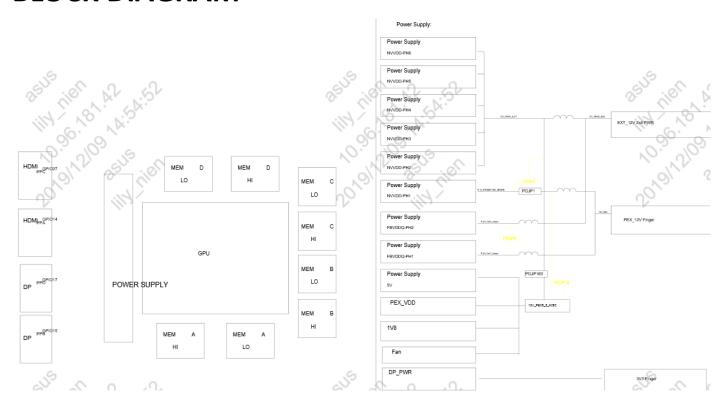

#### **POWER FLOW**

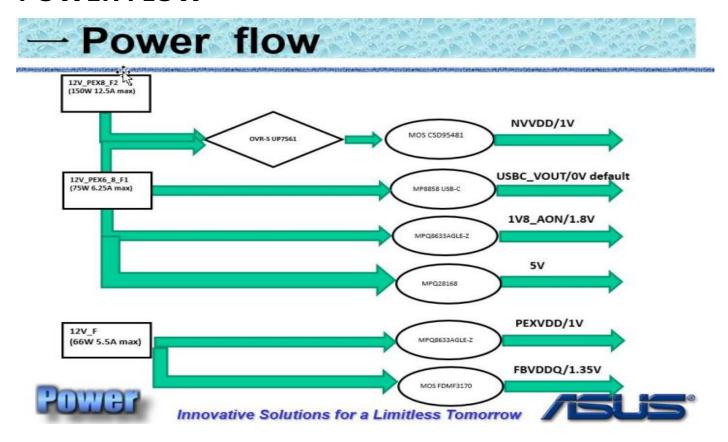


#### **VOLTAGE MEASURE POINT**

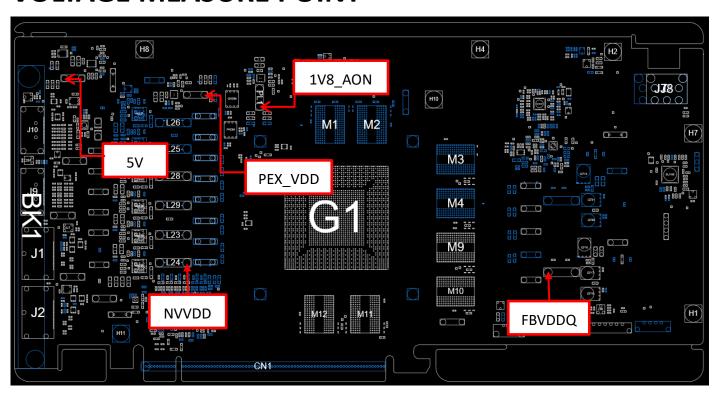

## **BGA REFLOW PROFILE**

Setpoints (Celsius)										
Zone	1	2	3	4	5	6	7	8	9	10
Top	100	125	150	170	190	215	235	250	255	200
Bottom	100	125	150	170	190	215	235	250	255	200
Conveyor Speed ( inch/min ):		26.00								

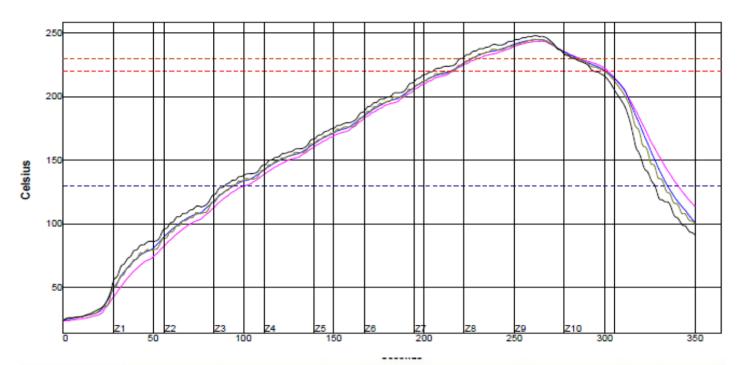

PWI= 95%	Max Rising Slope		Max Falling Slope		Preheat 130-220C		Reflow Time /220C		Peak Temp		Tot Time /230C	
U4 CEN - 1	1.80	-28%	-2.69	18%	115.35	71%	86.97	84%	243.84	38%	67.38	43%
M2 - 1	2.07	-17%	-3.28	-13%	120.00	78%	86.84	83%	245.08	61%	68.78	47%
J7 - 2	2.15	-14%	-3.41	-21%	121.51	80%	84.73	78%	245,24	53%	68,12	46%
L7 - 2	2.36	-8%	-3.76	-38%	115.18	71%	89.37	95%	248.28	83%	63,36	68%
Delta	0.66	-2400	1.06	55,000	8.35	1861 (1.00.00)	4.85	1.1840201	4.44	100000	8.00	1 EVICE