
Wood-Clad-Wall

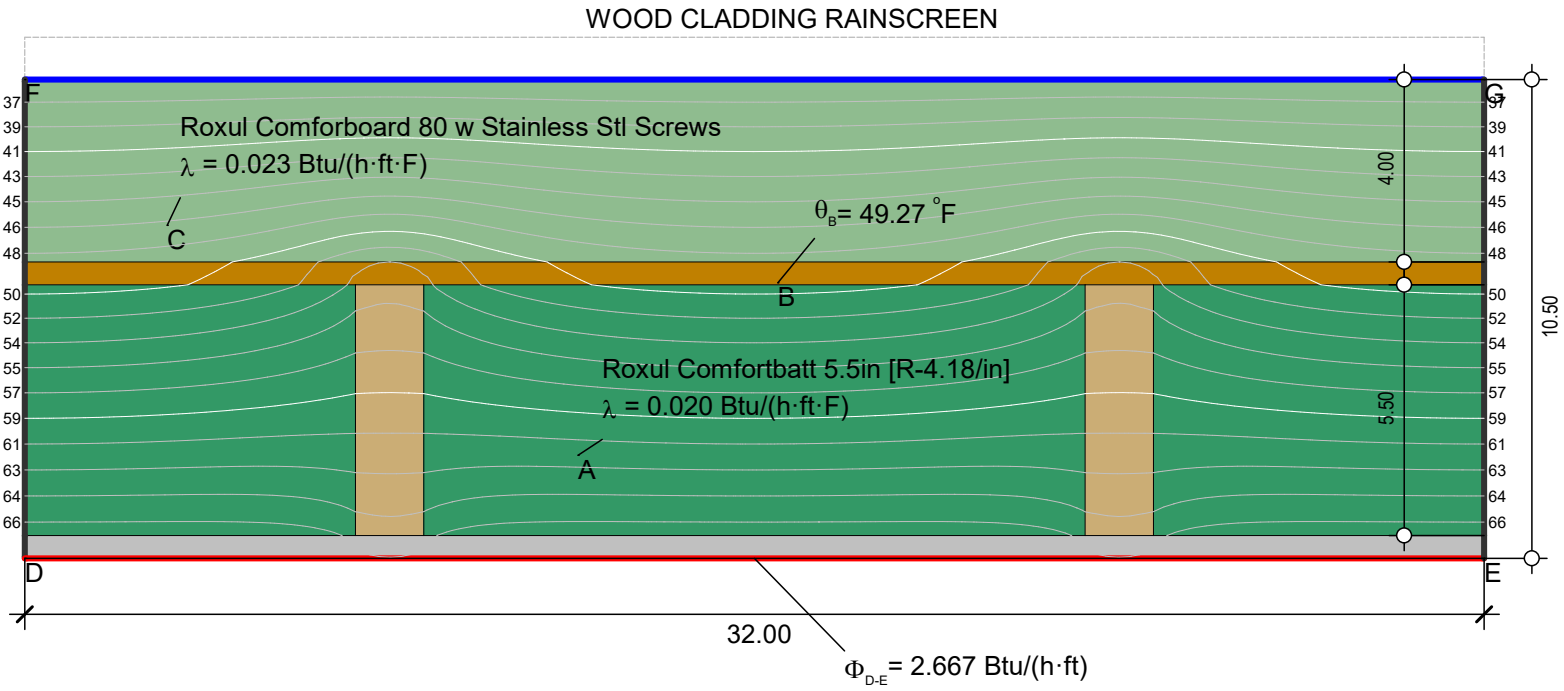

$$U_{eq\ D\text{-}E} = \frac{2.667}{32.94 \cdot 2.667} = 0.0304\ \text{Btu/(h·ft}^2\text{·F)} = \text{R-}32.8947$$

Boundary Condition	θ[°F]	h[Btu/(h·ft²·F)]
Exterior, Pittsburgh 90d Avg	35.060	1.355
Interior, normal, horizontal	68.000	1.355
Symmetry/Model section		

Material	λ[Btu/(h·ft·F)]	ε
GWB (Typ) [R-0.85/in]	0.098	0.900
Plywood (Typ) [R-1.2/in]	0.069	0.900
Roxul Comforboard 80 w Stainless Stl Screws	0.023	0.900
Roxul Comfortbatt 5.5in [R-4.18/in]	0.020	0.900
Wood, Coniferous [550 kg/m3], grain vertical	0.071, 0.161	0.900