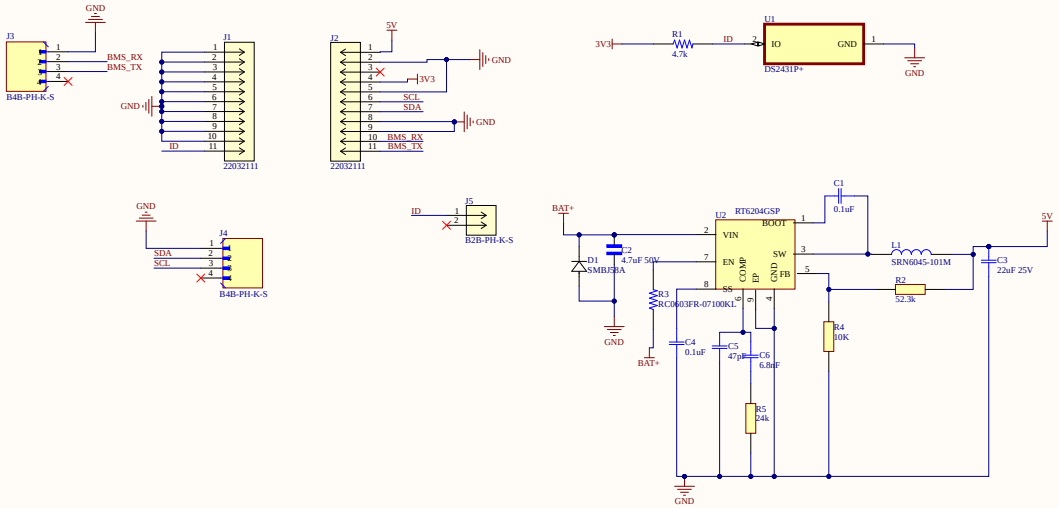
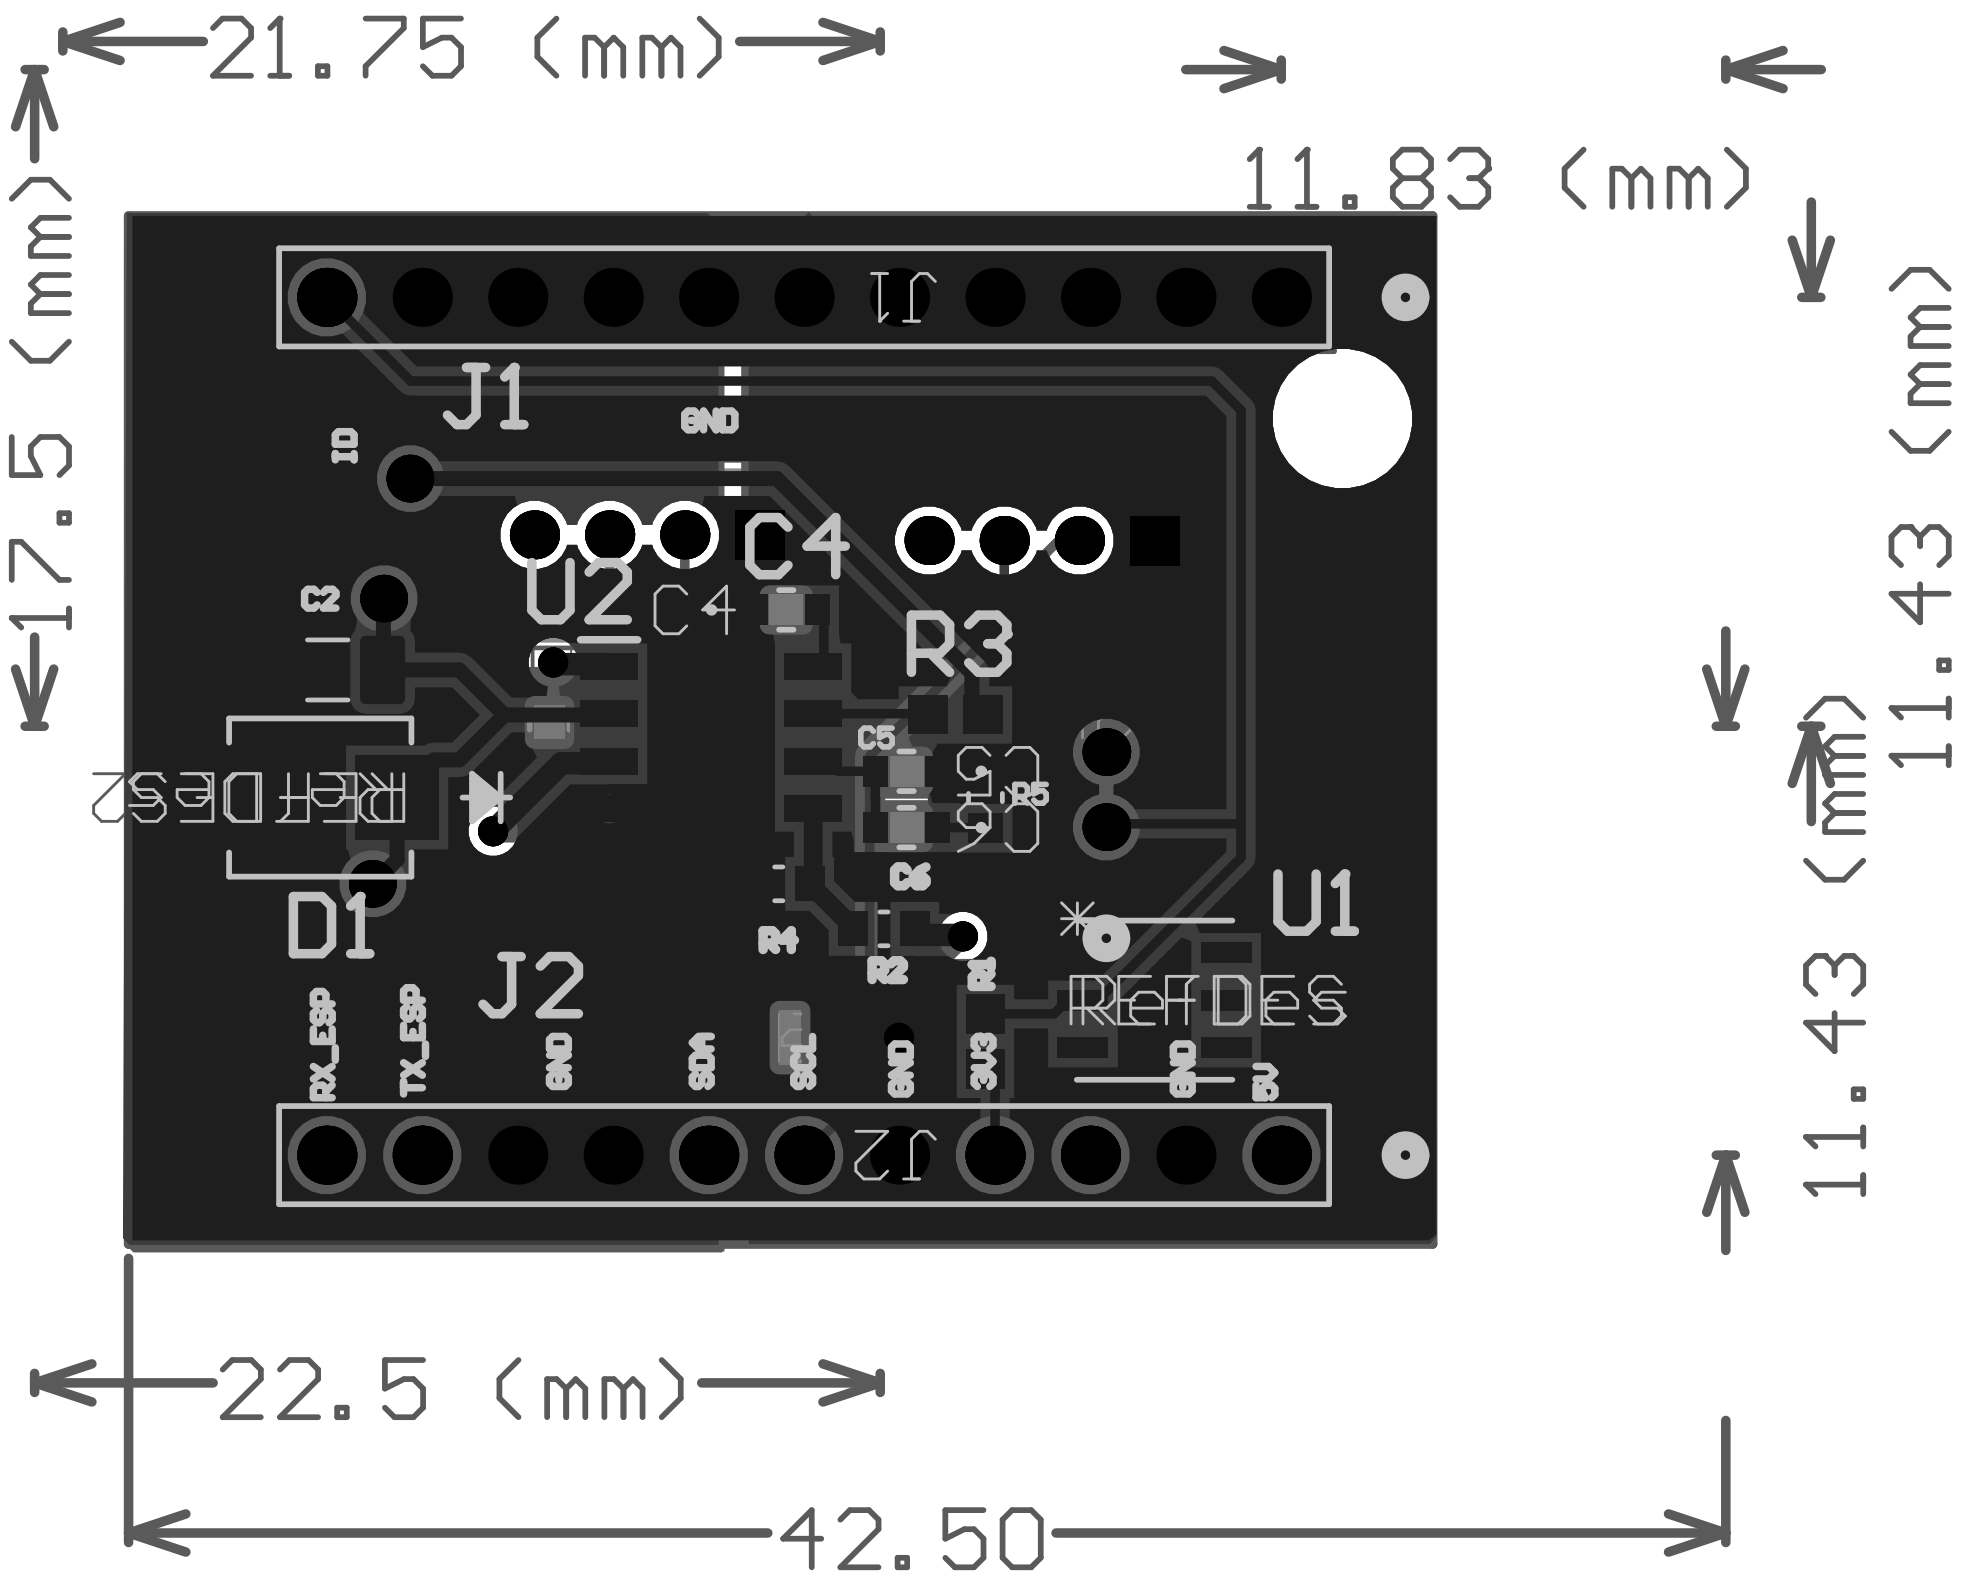


Title		
Size: A2	Number	Revision
Date: 8/25/2026	Sheet of	
File: C:\Users\...\PCB_Batterie_ESP.SchDoc	Drawn By:	


21.75 (mm)
11.83 (mm)
17.5 (mm)
11.43 (mm)
11.43 (mm)
J1
GND
IO
C4
U2
C2
R3
C5
R5
C6
R4
R2
R1
D1
J2
U1
RX_ESP
TX_ESP
GND
SDA
SCL
GND
3V3
GND
5V
22.5 (mm)
42.50

Name	Description	Designator	Footprint	LibRef	Quantity
0.1uF	CAP CER 0.1UF 50V X7R 0603	C1, C4	CAP_CL10_SAM	CL10B104JB8NNNC	2
4.7uF 50V	4.7 ÂµF Â±10% 50V Ceramic Capacitor X7R 1206 (3216 Metric)	C2	CAPC3216X180N	CL31B475KBHNFNE	1
22uF 25V	CAP CER 22UF 25V X5R 0805	C3	CAP_CC0805_YAG	CC0805MKX5R8BB226	1
47pF	CAP CER 47PF 50V C0G/NP0 0603	C5	CAP_CL10_SAM	CL10C470JB8NNNC	1
6.8nF	CAP CER 6.8nF 50V X7R 0603	C6	CAP_CL10_SAM	CL10B682JB8NNNC	1
SMBJ58A	TVS DIODE 58VWM 93.6VC DO214AA	D1	SMB_STM	SMBJ58A	1
22032111	KK 254 Wire-to-Board Header, Single Row, Vertical, 11 Circuits, PA Polyamide Nylon, Tin (Sn) Plating	J1, J2	CONN_SD-4030-0001_11_MOL	22032111	2
B4B-PH-K-S		J3, J4	JST_B4B-PH-K-S	B4B-PH-K-S	2
B2B-PH-K-S	Description	J5	CONN2_B2B-PH-K-S_JST	B2B-PH-K-S	1
SRN6045-101M	Bourns SRN6045 Series Shielded Wire-wound SMD Inductor with a Ferrite Core, 100 uH +/-20% 0.8A Idc	L1	SRN6045101M	SRN6045-101M	1
4.7k	Surface Mount Thick Film Resistor, RC Series, 4.7 kohm, 100 mW, - 1%, 50 V, 0603 [1608 Metric] RoHS Compliant: Yes	R1	RESC1607X60N	RC0603FR-074K7L	1
52.3k	YAGEO (PHYCOMP) RC0603 F	R2	RESC1608X55N	RC0603FR-0752K3L	1
RC0603FR-07100KL	100 kOhms Â±1% 0.1W, 1/10W Chip Resistor 0603 (1608 Metric) Moisture Resistant Thick Film	R3	RESC1607X60N	RC0603FR-07100KL	1
10K	Yageo RC Series Thick Film Surface Mount Resistor 0603 Case 10k	R4	RESC1608X55N	RC0603FR-0710KL	1
24k	Yageo 24k, 0603 (1608M) Thick Film SMD Resistor +/-1% 0.1 W, 0.2 W - RC0603FR-0724KL	R5	RESC1608X55N	RC0603FR-0724KL	1
DS2431P+	EEPROM Memory IC 1Kb (256 x 4) 1-WireÂ® 2Âµs 6-TSOC	U1	21-0382_D6+1_MXM	DS2431P+	1
RT6204GSP	Switching Voltage Regulators 500mA, 60V, 350kHz Synchronous Step-Down Converter	U2	SOIC127P600X175-9N	RT6204GSP	1