
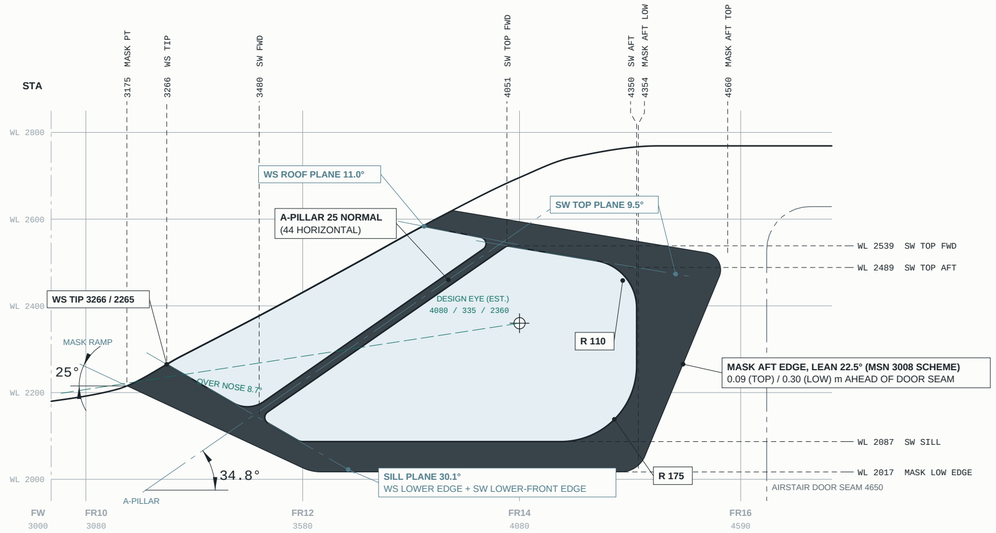


SIDE VIEW (PORT)

SEEN FROM PORT - SCALE 1:10

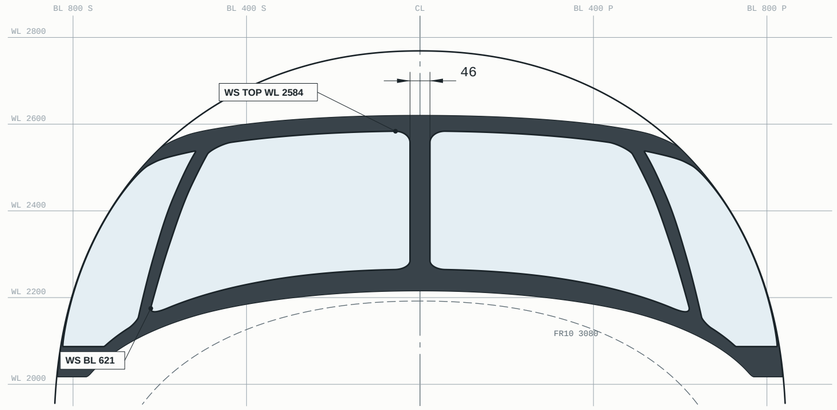

FRONT VIEW

SEEN FROM AHEAD, STARBOARD LEFT - SCALE 1:10

vs PILATUS 190.10.40.432 SHEET 1 (mm)

PANE	VIEW	REFERENCE	RMS	MAX	WORST AT
windshield	side	ws_port	2.4	6.0	3267 / 2265
side window	side	NGX port DV+main	5.1	13.5	3654 / 2087
side window	side	sw_stbd plan>OML *	8.8	20.7	3905 / 2066
windshield stbd	plan	ws_stbd	5.2	11.4	3905 / 243
windshield port	plan	ws_port	5.2	11.3	3905 / -241
side window stbd	plan	sw_stbd	5.6	11.7	3814 / 590
side window port	plan	NGX port DV+main	6.0	12.2	3810 / -578
windshield stbd	front	ws_stbd	4.0	6.7	226 / 2578
windshield port	front	ws_port	4.0	6.6	-223 / 2572
side window stbd	front	sw_stbd	4.9	10.4	587 / 2382
side window port	front	NGX port DV+main	4.8	13.6	-765 / 2087

Symmetric point-to-outline distance, our OML contours vs the drawn loops. * starboard pane lifted onto our OML from the plan (sill ill-conditioned; information only).

vs PHOTOS (refs/photo_notes.md)

ITEM	PHOTOS	OURS	DRAWING / NOTE
pillar edge angle	32-39 deg	34.8 deg	dwg 34.1-34.6
A-pillar width, side (horiz.)	0.05-0.06	0.044	dwg 0.038
side-window sill WL	2.09-2.11	2.087	dwg 2.087 (DV 2.073)
side-window aft extreme STA	~4.34	4.350	dwg 4.356
glass height	0.40-0.45 (a)	0.451	dwg 0.448
sill length / height	1.98-2.09 (a)	1.93	dwg 1.93
top length / height	0.71-0.85 (a)	0.66	dwg 0.66
D radius top / bottom	0.09-0.14 / 0.09-0.17	0.110 / 0.175	dwg 0.12 / 0.21 (b)
D straight vertical	0.15-0.19	0.097	dwg 0.06 (b)
side-window top rise (fwd)	2-6 deg (a)	9.5 deg	dwg 9-10 deg
windshield roof rise (fwd)	~25 deg (c)	11.0 deg	dwg 10.3 deg
centre post, glass to glass	0.08-0.14 (d)	0.046	dwg 0.046
mask below sill	0.06-0.08	0.070	photos only
mask ramp angle	21-27 deg	25.0 deg	photos only
mask fwd point STA / WL	3.17 / 2.21	3.175 / 2.215	ramp meets crown
mask aft edge lean (f)	3008: 22-27 deg	22.5 deg	MSN 3008, bottom fwd
other airframes (f)	3010: 12-16; 3036: 0	-	3066: curved (glass D)
mask aft STA, WL 2.10 / 2.40	3008: 4.385 / 4.515	4.388 / 4.513	stbd_ground cam
mask aft margin low / top	0.07 / 0.15-0.20	0.004 / 0.210	from aft extreme
mask top margin	0.055-0.07 (e)	0.060	normal to top edge
mask aft to door seam, top / low	3008: 0.10 / ~0.27	0.090 / 0.296	seam STA 4650
other airframes (f)	3036: ~0.05, vertical	-	reaches the door

(a) perspective: ground-level cameras sit 10-15° below the window; the tumblehome shortens the glass height and flattens the top edge (0.448 m -> 0.40-0.41 m; 9.5° -> 2-6°).

(b) drawing vs photos conflict: kept 0.175 (within 15 mm of the drawing) - owner to decide.


(c) the side-projection slope of the windshield's outboard roof corner, not the roof plane.

(d) indicative only (oblique views).

(e) ratio to the glass height on PRO s/n 3010 / 3036 and the long-lens NGX photo (photo_notes: 0-0.05).


(f) the mask's aft edge is a livery item and differs per airframe (model\livery.py MASK_SCHEMES): s/n 3008 photos rectified on the OML (stbd_ground / port_hangar_130 cameras); this sheet and L5 carry s/n 3008.

VISION FROM THE DESIGN EYE (ESTIMATED)	
design eye STA / BL / WL	4080 / 335 / 2360
over the nose (eye BL, ahead)	8.7° down
abeam, over the side-window sill	29.5° down
abeam, to the side-window top	40.3° up
ahead, to the windshield roof edge	54.4° up

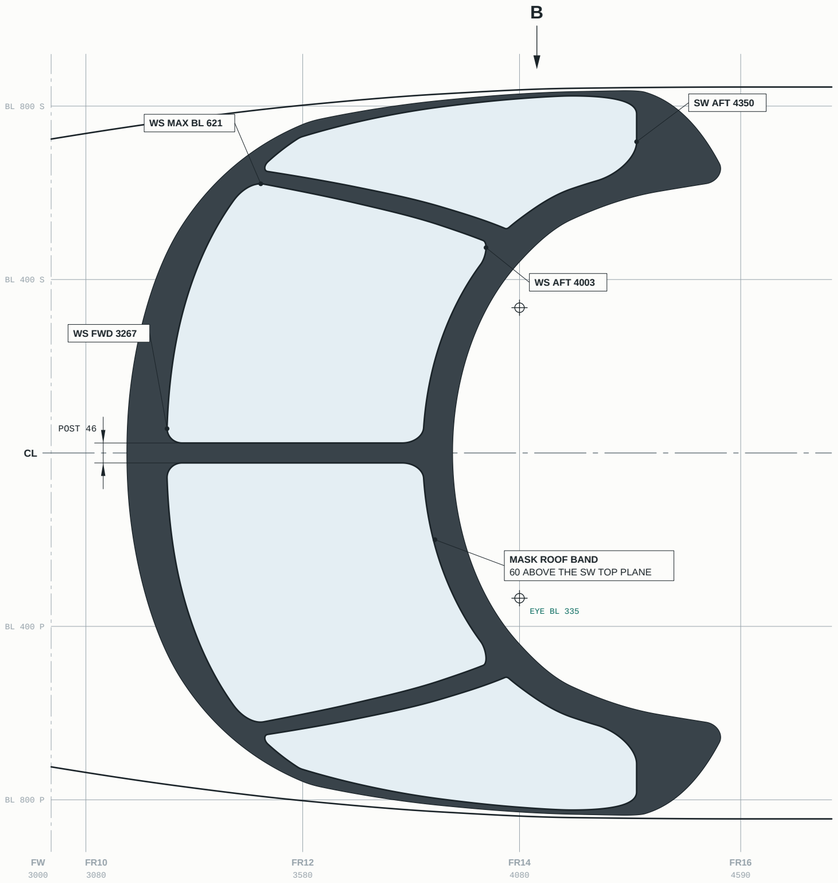

PLAN

SEEN FROM ABOVE, STARBOARD UP - SCALE 1:10

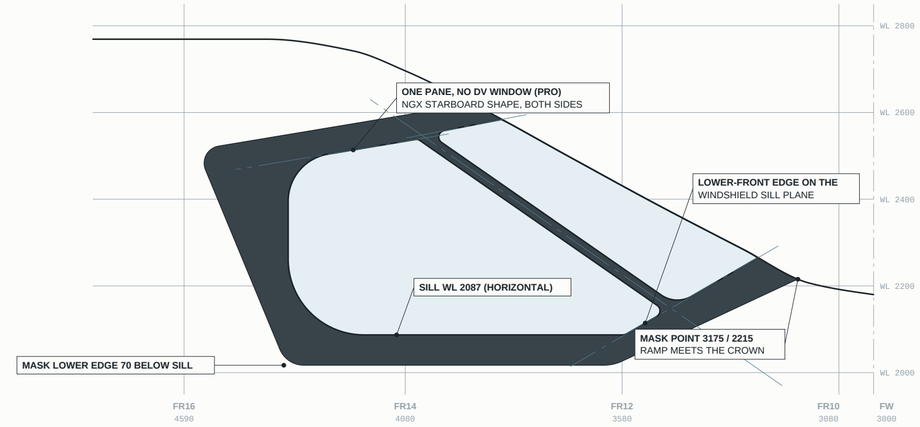

VIEW B (STARBOARD)

SEEN FROM STARBOARD, NOSE RIGHT - SCALE 1:10

NOTES

1. Drawn from the parameters of model/cockpit_glazing.py: zero contours of the glazing and mask signed-distance fields on the outer mould line of model/fuselage.py (sheet L1), projected. Never from the mesh. STA = m aft of the datum (3000 mm ahead of the firewall); WL above the static ground line.
2. Every edge except the centre post is a plane normal to the plane of symmetry: straight in side projection (chain-dotted construction lines). Post: |BL| = 23. Corners filleted (side projection).
3. PC-12 PRO: no direct-vision window; the NGX starboard single pane is used on both sides (Pilatus PRO release; photos of s/n 3001, 3010, 3036, 3066).
4. Dark mask (filled): PRO livery item, one continuous area around all four panes - roof band, centre post, lower band with a ramp to the windshield's forward corner, straight leaning aft edge ahead of the airstair door. Drawn for the MSN 3008 scheme (aft edge 22.5°; the aft edge varies per airframe: model/livery.py MASK_SCHEMES). Mask corner radii: low-aft 60, top-aft 40, ramp 100.
5. Windshield roof edge: its own plane (11.0°, 9 mm above the side-window top plane at STA 4000) - our crown section at STA 3900 is 5-12 mm fuller than the drawing's, so plan and front cannot both match a single plane better than ~11 / 7 mm.

LEGEND

- glass (pane outline)
- dark mask (PRO)
- construction plane (side projection)
- airstair door seam / max-breadth WL
- design eye, sight line

SCALE 1:10

0 0.1 0.2 0.3 0.4 0.5 m

PILATUS PC-12 PRO

COCKPIT GLAZING & PRO MASK

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-L2	A	1:10	A2 · 1 OF 1	mm

DRAWN	DATE
Claude - loftkit parametric model	2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION