

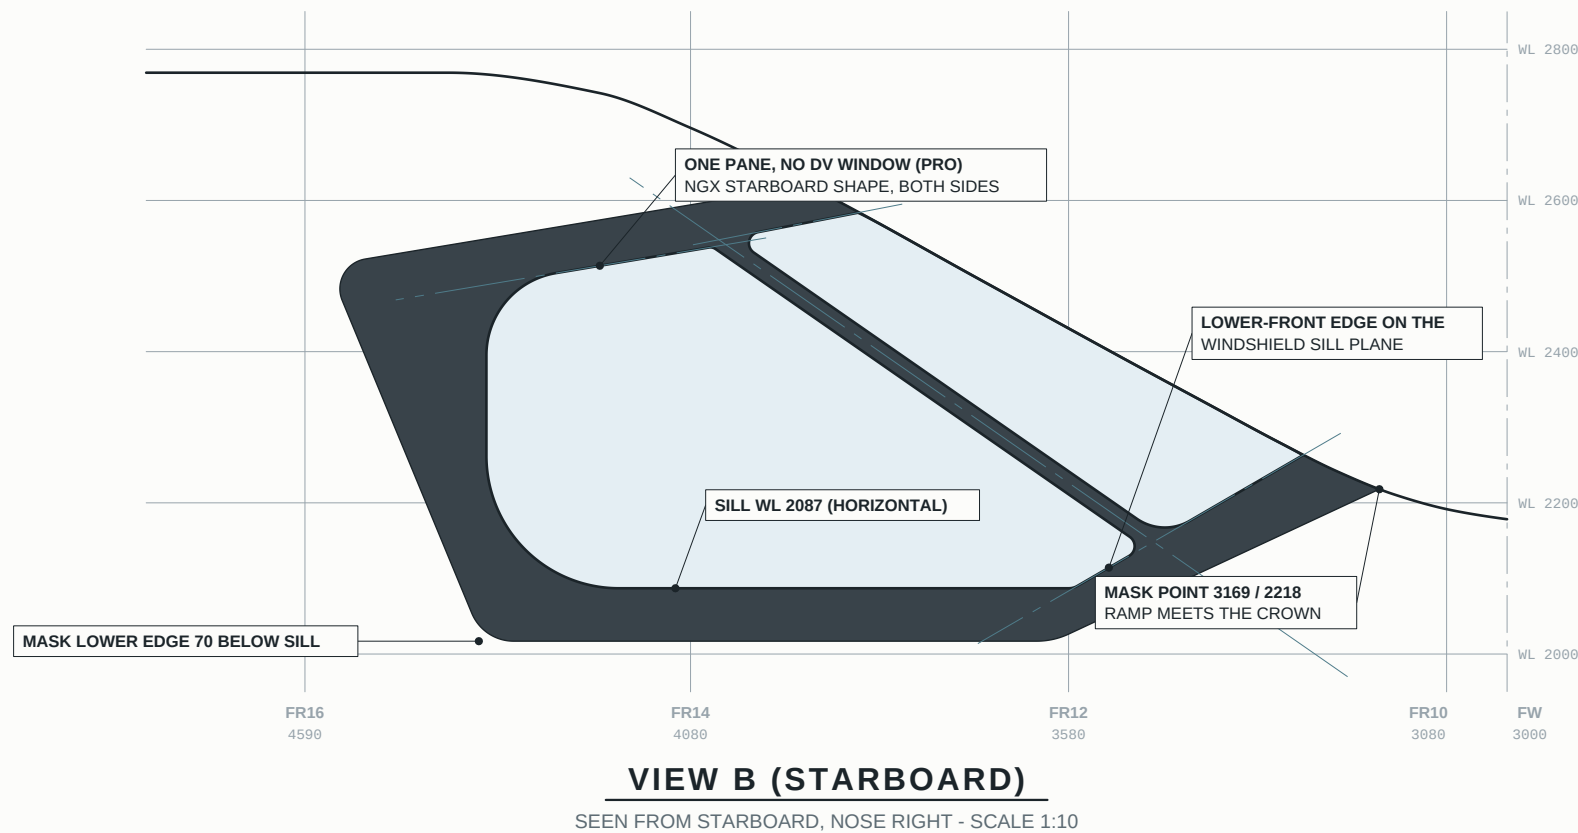
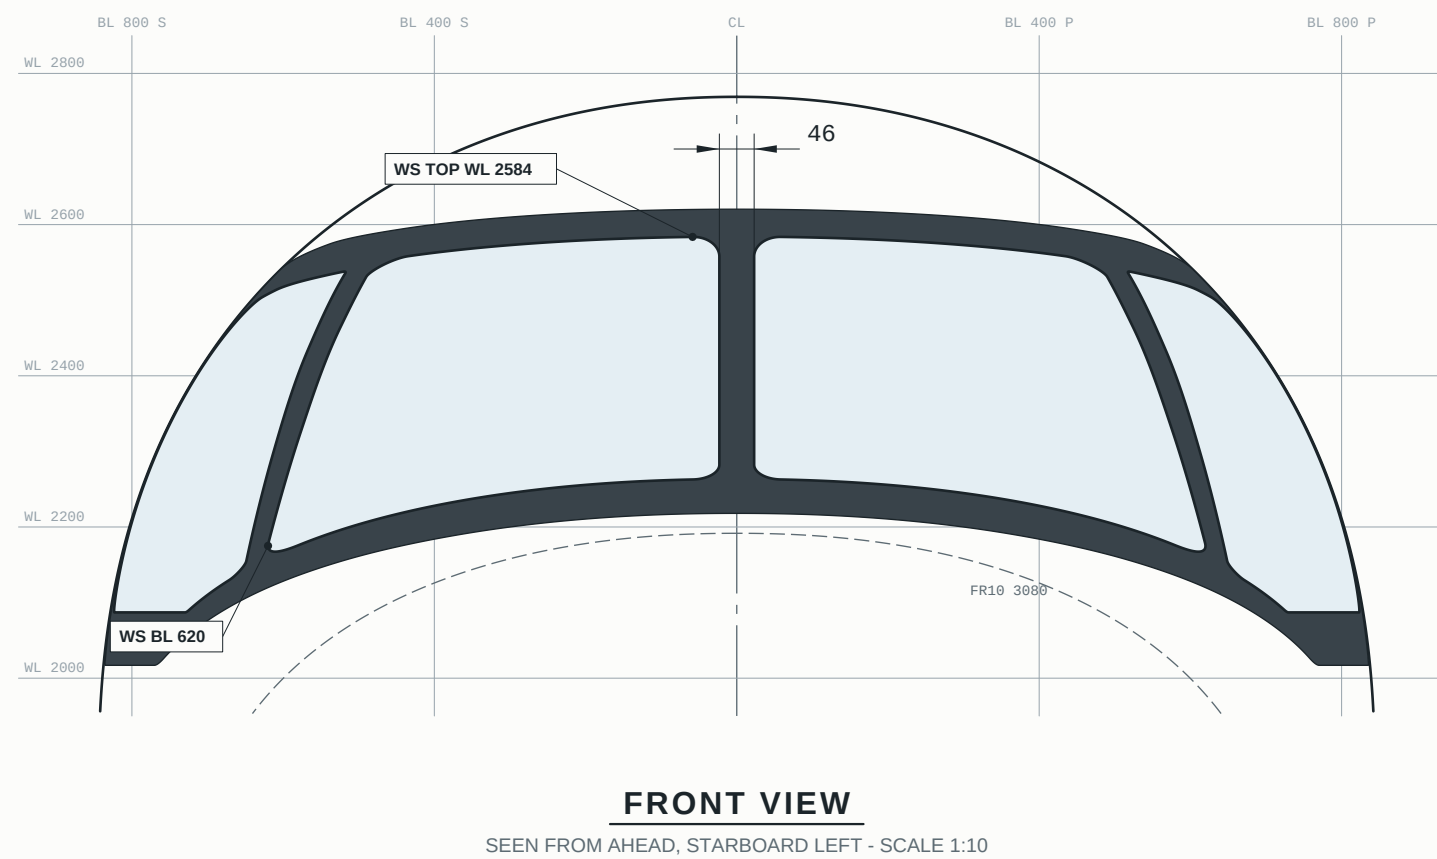


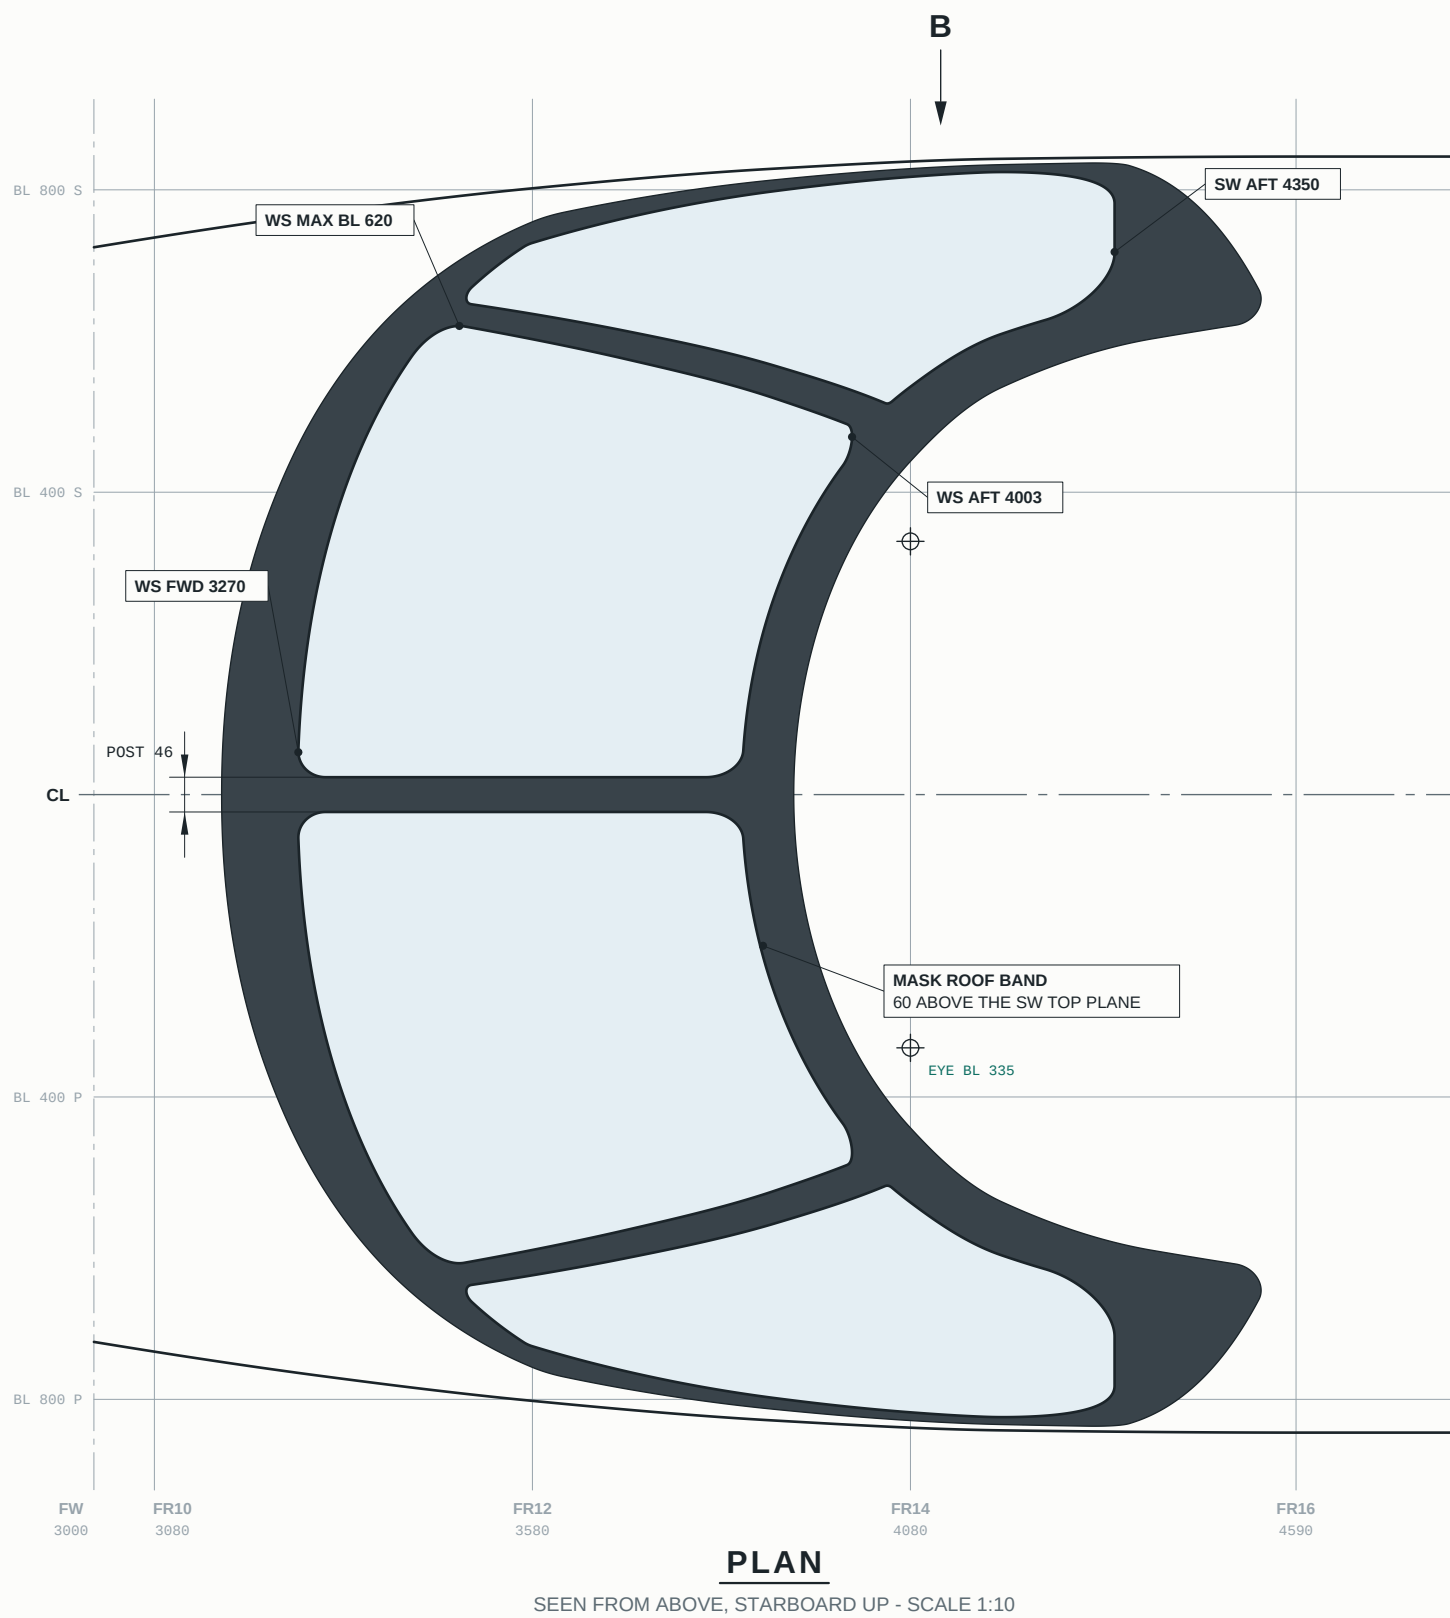

- ## NOTES

1. Drawn from the parameters of model/closetpit_glazing.py: zero contours of the glazing and mask signed-distance fields on the outer mould line of model/fuselage.py (sheet L1), projected. Never from the mesh. STA = m aft of datum (3000 mm ahead of the firewall); WL above the static ground line.
2. Every edge except the centre post is a plane normal to the plane of symmetry: straight in side projection (chain-dotted construction lines). Post |BL| = 23. Corners filleted (side projection).
3. PC-12 PRO: no direct vision window, the NGX starboard single pane is used on both sides (Pilatus PRO release; photos of s/n 3001, 3010, 3036, 3066).
4. Dark mask (filled): PRO livery item, one continuous area around all four panes - roof band, centre post, lower band with a ramp to the windshield's forward corner, straight leaning aft edge ahead of the airstair door. Drawn for the MSN 3008 scheme (edge 22.5°); the aft edges vary per airframe: model/livery.py MASK_SCHEMES; Mask corner tip: low-aft 60, top-aft 40, ramp 100.
5. Windshield roof edge: its own plane (11.0°, 9 mm above the side-window top plane at STA 4000) - our crown section at STA 3900 is 5.12 mm fuller than the drawing's; so plan and front cannot both match a single plane better than -11.7° mm.

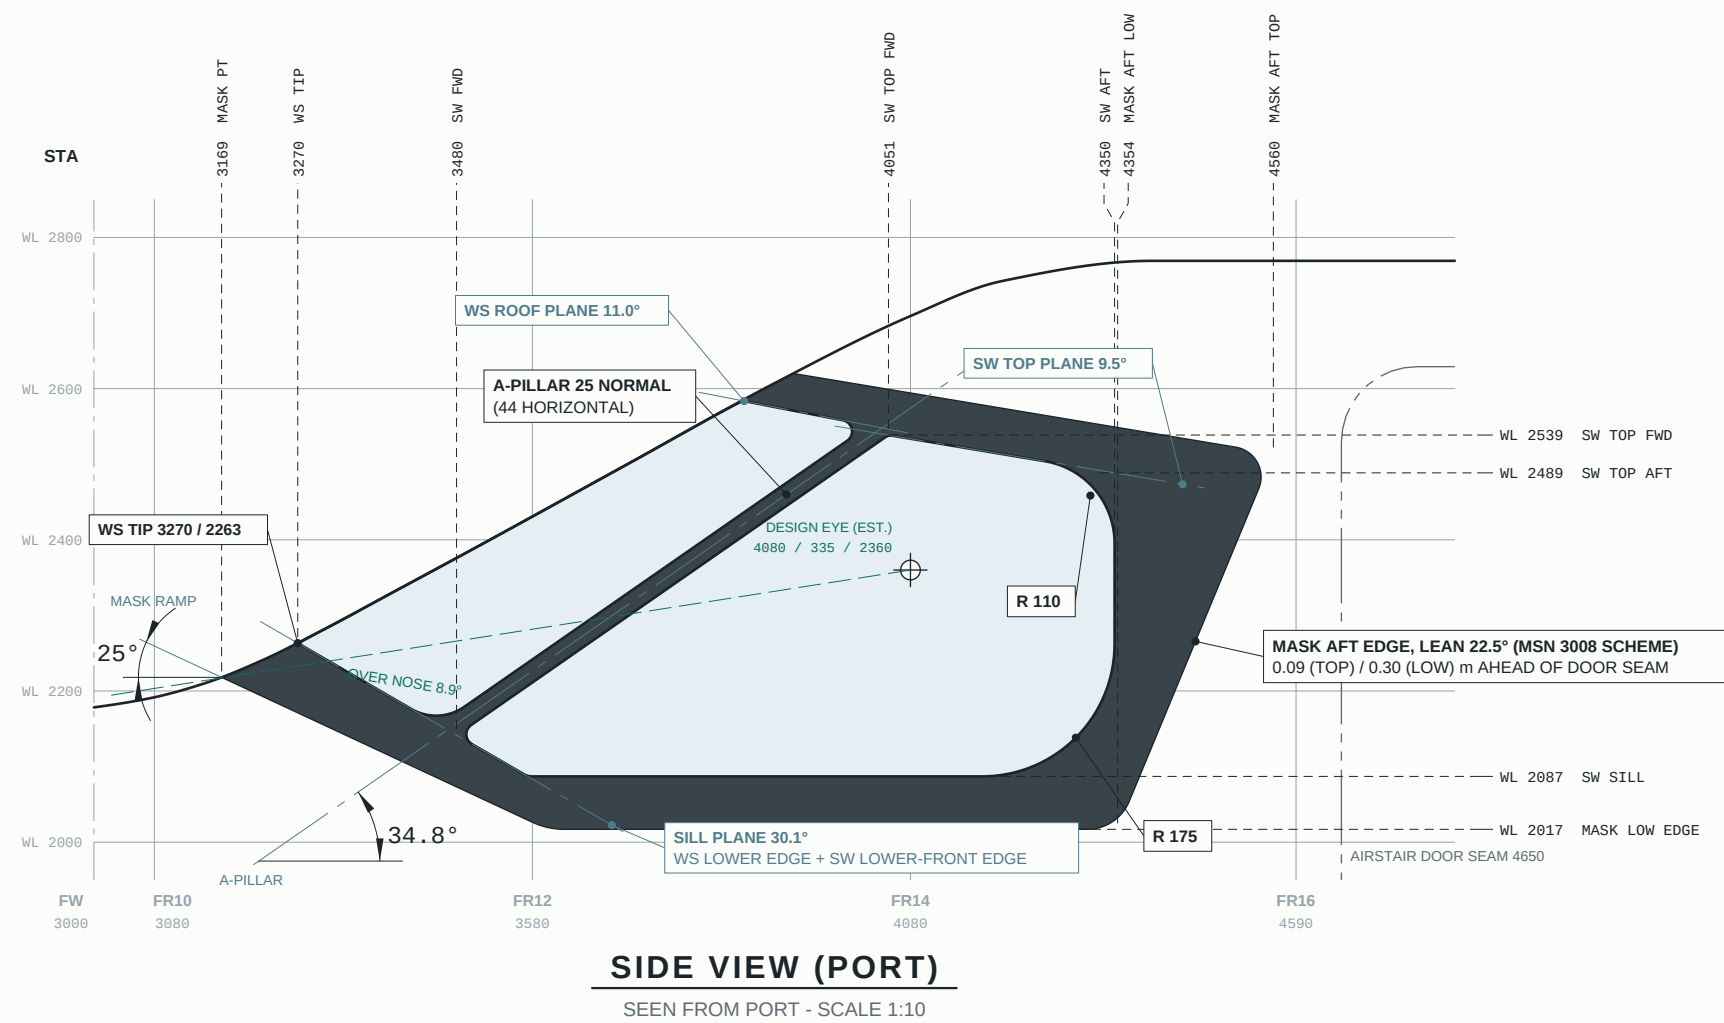


vs PILATUS 190.10.40.432 SHEET 1 (mm)					
PANE	VIEW	REFERENCE	RMS	MAX	WORST AT
windshield	side	ws_port	2.6	5.4	3892 / 2514
side window	side	NGX_port DV+main	5.1	13.5	3654 / 2047
windshield	side	ws_sbtbd plan=OML *	8.8	20.7	3905 / 2066
windshield sbtd	plan	ws_sbtbd	4.4	11.4	3905 / 243
windshield port	plan	ws_port	4.4	11.3	3894 / 244
side window port	plan	ws_sbtbd	5.6	11.8	3814 / 590
side window port	plan	NGX_port DV+main	6.1	12.3	3810 / 578
windshield sbtd	front	ws_sbtbd	3.5	6.7	226 / 2578
windshield port	front	ws_port	3.5	6.6	-197 / 2580
side window sbtd	front	ws_sbtbd	4.9	10.4	589 / 2378
side window port	front	NGX_port DV+main	4.8	13.6	-766 / 2047

Symmetric point-to-outline distance, our OML contours vs the drawn loops. * starboard pane lifted onto our OML from the plan (sill ill-conditioned; information only).

vs PHOTOS (refs/photo_notes.md)			
ITEM	PHOTOS	OURS	DRAWING / NOTE
pillar edge angle	32.39 deg	34.8 deg	dwg 34.1-34.6
A-pillar width, side (horiz.)	0.05-0.06	0.044	dwg 0.038
side-window sill WL	2.09-2.11	2.087	dwg 2.087 (DV 2.073)
side-window at extreme STA	-4.34	4.390	dwg 4.356
glass height	0.40-0.45 (a)	0.451	dwg 0.448
sill length / height	1.98-2.09 (a)	1.93	dwg 1.93
top length / height	0.71-0.85 (a)	0.66	dwg 0.66
D radius top / bottom	0.09-0.14 / 0.09-0.17	0.110 / 0.175	dwg 0.12 / 0.21 (b)
D straight vertical	0.15-0.19	0.097	dwg 0.06 (b)
side-window top rise (hwd)	2.6 deg (a)	9.5 deg	dwg 9.10 deg
windshield roof rise (hwd)	-25.0 deg (c)	11.0 deg	dwg 10.3 deg
center post top to glass	0.05-0.06 (d)	0.046	dwg 0.046
mask below sill	0.06-0.08	0.070	photos only
mask ramp angle	21.27 deg	25.0 deg	photos only
mask fwd point STA / WL	3.7 / 12.1	3.169 / 22.18	paint meets crown
mask at edge lean (f)	3008: 22-26 deg	22.5 deg	MSM 3008, bottom fwd
other airframes (f)	3008: 12-16, 3036: 0		3066: curved (glass D)
mask at STA, WL 2.10 / 2.40	3008: 4.386 / 4.515	4.388 / 4.513	stbd_ground cam
mask top margin low / top	0.07 / 0.15-0.20	0.004 / 0.210	from aft extrema
mask top margin	0.055-0.07 (c)	0.080	normal to top edge
mask at to door seam, top / low	3008: 0.10 / -0.27	0.090 / 0.296	stn STA 4650
other airframes (f)	3036: -0.15, vertical	-	reaches the door

- (a) perspective: ground-level cameras sit 10'-15" below the window; the tumblehome shortens the glass height and flattens the top edge (0.448 m > 0.40-0.41 m, 9.5" > 2-6").
- (b) drawing vs photos conflict: kept 0.175 (within 15 mm of the drawing) - owner to decide.
- (c) the side-projection slope of the windshield's outboard roof corner, not the roof plane.
- (d) indicative only (oblique views).
- (e) the glass height on PRO 3010 / 3036 and the long-ends NDKV photos (photo, notes: 0.6-0.65).
- (f) the mask's add glass is a heavy item and differs per airframe (modeling by MASK, SICHMES) since 3008 photos rectified on the OML (stbd_ground / rotr_hanger_130 cameras); this sheet and L5 carry syn 3008 photos.

VISION FROM THE DESIGN EYE (ESTIMATED)	
design eye STA / BL / WL	4080 / 335 / 2360
over the nose (eye BL, ahead)	8.9° down
abeam, over the side-window sill	29.5° down
abeam, to the side-window top	40.3° up
ahead, to the windshield roof edge	54.4° up



PILATUS PC-12 PRO COCKPIT GLAZING & PRO MASK				 FIRST ANGLE PROJECTION
DWG NO	REV	SCALE	SHEET	UNITS
PC12-L2	A	1:10	A2 · 1 OF 1	mm
DRAWN Claude - loftkit parametric model				DATE 2026-09-24
RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION				