
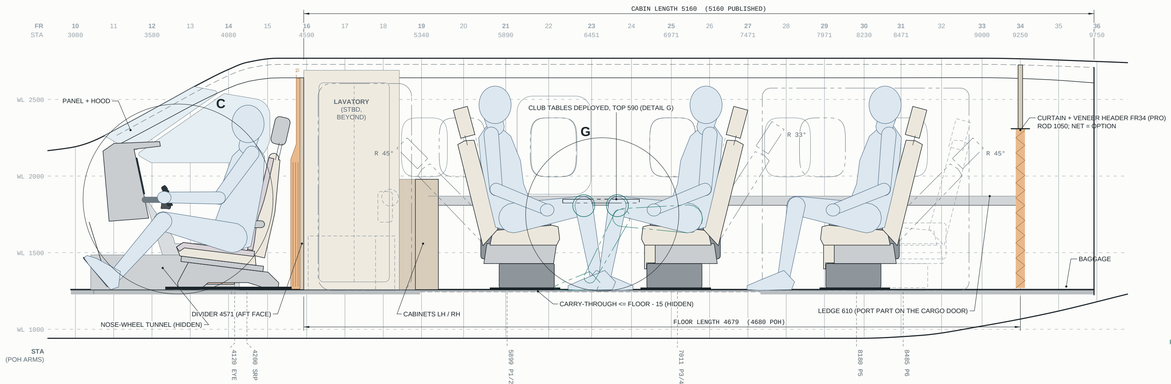



INBOARD PROFILE AT BL 375 P

SEEN FROM PORT, PORT SIDEWALL REMOVED - PHANTOM R n°: RECLINE REACHED - SCALE 1:20

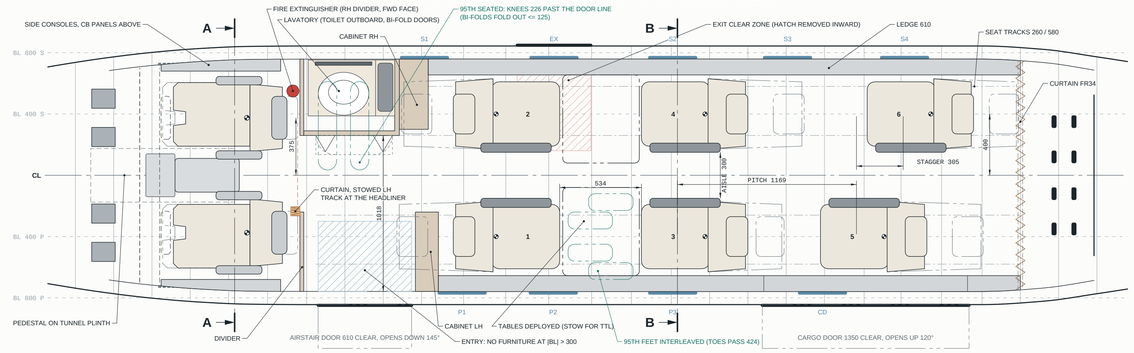

PLAN AT CUSHION HEIGHT (WL 1689)


SEEN FROM ABOVE, STARBOARD UP - EX-6S-2 LAYOUT - PHANTOM BEHIND EACH SEAT: RECLINED BACK - SCALE 1:20

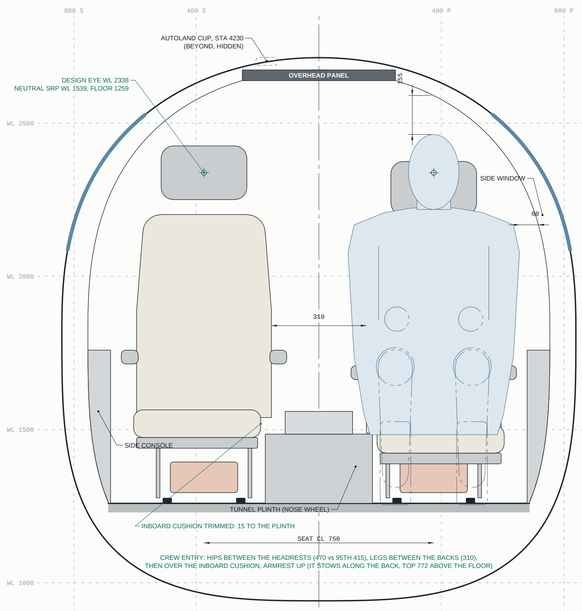

SECTION A-A

STA 4120, LOOKING AFT (STBD LEFT) - SCALE 1:10


PHANTOM: KNEES, LEGS, HANDS FORWARD OF THE CUT

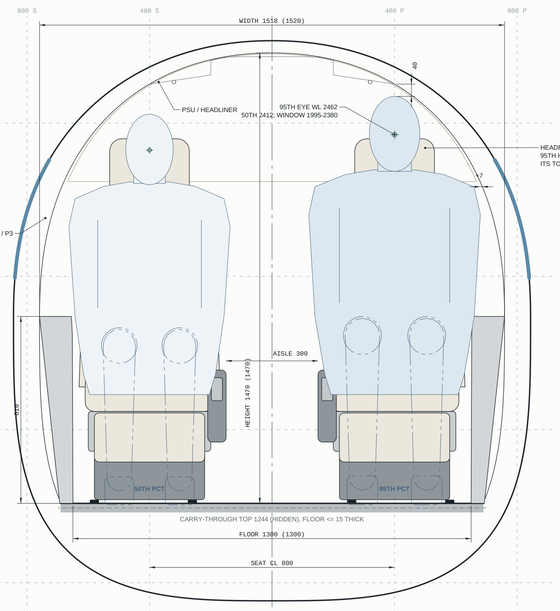

SECTION B-B

STA 7011, LOOKING AFT (STBD LEFT) - SCALE 1:10

PHANTOM: KNEES, LEGS FORWARD OF THE CUT - BROWN: FR34 HEADER + ROD, BEYOND

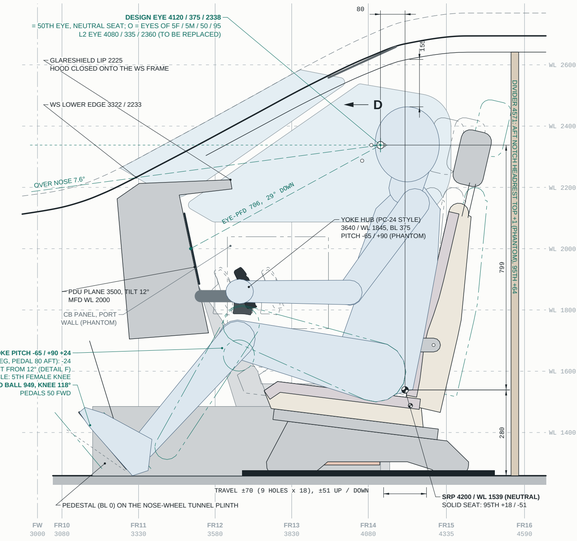


DETAIL C - CREW STATION

LEFT SEAT, BL 375 P, SEEN FROM PORT - SCALE 1:10

SEAT MAP - EX-6S-2 (STA / BL mm)

SEAT	FACING	BL	CUSH. FRONT	OCCUP. (POH)	SRP STA	BACK REAR	RECLINE	WINDOW
PILOT	FWD	-375	3720	4071	4200	4462	-	-
CO-PILOT	FWD	+375	3720	4071	4200	4462	-	-
PAX 1	AFT	-400	6242	5899	5827	5537	45°	P1 -294
PAX 2	AFT	+400	6242	5899	5827	5537	42°	EX +306
PAX 3	FWD	-400	6776	7011	7191	7481	33°	P3 -31
PAX 4	FWD	+400	6776	7011	7191	7481	45°	S2 -31
PAX 5	FWD	-400	7945	8180	8360	8650	45°	CD -222
PAX 6	FWD	+400	8258	8485	8665	8955	38°	S4 +9

Occupant = POH NGX Report 02406 WdB arm (datum = model datum). Crew: centre notch, ±70. Recline: reached, raised headrest (limit on L6B). Window: nearest, offset.

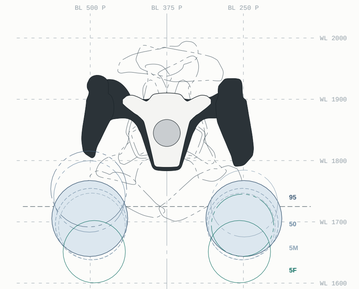


ROLL ±70° (E) PHANTOM; SOLID CIRCLES: KNEES AT EACH SETTING, NEUTRAL PEDALS; PHANTOM CIRCLES: THE UP-KNEE AT FULL RUDDER (PEDAL 80 AFT)

95TH: NEUTRAL PEDALS +24 WINGS LEVEL, CONTACT FROM 12° ROLL; FULL RUDDER -24
50TH: +36, CONTACT FROM 22°; FULL RUDDER -8, CONTACT FROM 0° (OPEN POINT, L6B)

DETAIL F - YOKE SWEEP vs KNEES

LEFT SEAT, LOOKING FORWARD AT THE KNEES (STA 3653) - SCALE 1:5

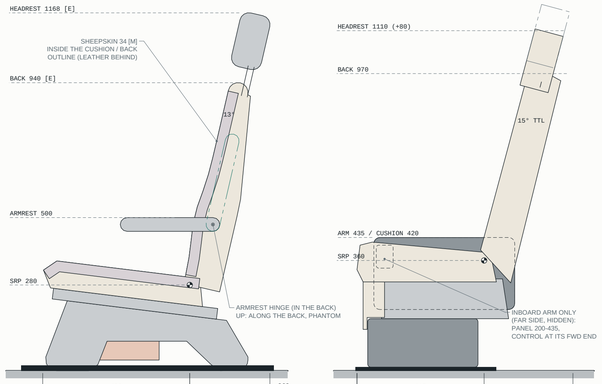


CREW (IPECO 3A318 TYPE), WIDTH 540, CUSHION 460 (INBOARD 185 + 230)

EXECUTIVE (PAX 3), WIDTH 500, CUSHION 420

DETAIL E - SEATS

CREW (NEUTRAL) / EXECUTIVE (UPRIGHT), SEEN FROM PORT - HEIGHTS ABOVE THE FLOOR - SCALE 1:10

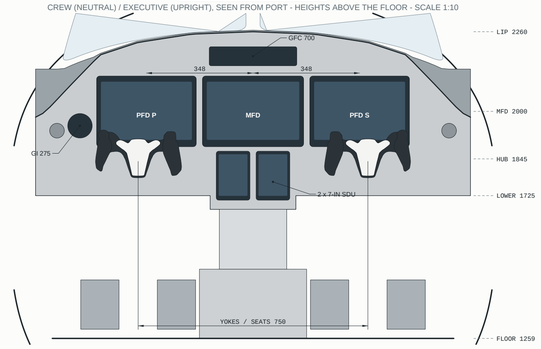

VIEW D - PANEL

LOOKING FORWARD (STBD RIGHT) AT STA 3500 - SCALE 1:10

LEGEND

- section cut (OML, floor)
- headliner / sidewall lining
- port wall item (removed)
- hidden (carry-through, tunnel, lav)
- sight line from the design eye
- travel / recline / deployed
- full rudder, table posture, 5F knee
- 95th-pct male manikin
- 50th-pct male manikin
- seat (leather)
- veneer: divider, lav, cabinets, header
- pleated curtain: FR34, divider
- ledge / console

SYMBOLS

- seat reference point (SRP)
- design eye / seated eye
- window (plan: on the sidewall)
- exit / entry clear zone

SCALE 1:20

0 0.5 1 1.5m

SCALE 1:10

0 0.2 0.4 0.6 0.8m

SCALE 1:5

0 0.1 0.2 0.3 0.4m

NOTES, CHECK TABLES, REACH, DEVIATIONS & DECISIONS, KEY PARAMETERS AND THE OPEN POINTS FOR THE OWNER: SHEET L6B (PC12-L6 SHEET 2 OF 2).



DETAIL G - CLUB TABLE vs LEGS

PAX 1 (95TH) / PAX 3 (50TH), BL 400 P, SEEN FROM PORT - SCALE 1:10

REVISIONS - PC12-L6

REV	DATE	DESCRIPTION
A	-	first issue of the interior (legacy 3-D interior, not drawn from parameters)
B	2026-09-24	Stage-2 parameter tables (model/interior.py); crew / cabin checks; review r1
C	2026-09-26	review r2: yoke grips from the measured span, SDUs, one-arm cabin seats, lavatory, full rudder, grasp / touch reach, crew armrest hinge; review r3: divider curtain + extinguisher + autoland drawn, lav cabinet 350 [M], pedals +/-125 [M] with the crew knees on the hip-pedal line, knee / yoke sensitivity and POH-arm CG cross-check (L6B), 5th-female open point, section phantoms, seat tracks from parameters
D	2026-09-26	Stage-3 review r2: crew sheepskin 34 [M] drawn inside the cushion / back outline (the 3-D cover had stood proud of it), yoke grips r 15.5 x 140 [M] (P1046408), crew tracks end 15 mm past the rear foot (clear of the stowed curtain, L6B)
E	2026-09-27	Stage-3 review r3: legrest under the cushion of the forward-facing executive seats [M] (P1046402-05); PC-24 yoke face: white goblet shield (top +/-70) on a black body, grip heads r 20 [M] (P1046408); PCL paddle grip [M], armrest vs pedestal row (L6B); yoke-roll knee contact recorded as an owner decision
F	2026-10-03	Stage-4 final judge r1 (I2, P1046408 re-measured): yoke shield a full U (half-width fractions 0.80 / 0.50 at 1/2 / 4/5 of its height, −0.86 / 0.66 of the top width; the goblet left a broad black body), grips 160 long (tops 20 higher), heads r 18 over 42 [M]
G	2026-10-03	model judging r1: headliner soffit bands (LIVING soffit: 50 step at the raised channel's edge, straight band to the lining at [BL] 400, P1046402 / 04 / 06) carrying the PSU pods (psu_lat 370 -> 320) and downlights, cabin headroom to the headliner underside (L6B); PDU bezel tops visible from the design eyes under the eyebrow fascia (L6B row)
H	2026-10-05	flight deck r1 (owner: details): yoke re-measured on P1046408 / 09 and the JTF elevation -- hub 140 x 120, white Y shield (horns to +/-70, mid-height +/-39, round 45 foot), paddle grips r 16 widening to 21 over their top 90 (no round head); CCD palm grip 100 x 85, top 385 above the floor [M]; glareshield lip arch from both JTF elevations (outboard 15-70 lower); GI 275 unit 82.6 square over its 79.4 cut-out [S]; SDUs 110 x 195 [M]
I	2026-10-05	yoke rev I (owner: 'the yoke isn't quite right especially if you look at the details'): the outline, side profile and switches of the new yoke detail sheet PC12-L6Y (interior.YOKE_DESIGN: 8 PRO photos + a 4-photo bundle adjustment) -- a Y shell with a raised silver crown (-56 .. +67), black rim / necks, open hand slots, grips hanging from the arm tips (heads 95, bottoms -42, span 283), the aft face 17.5 deg top forward, grips raked 20 and toed out 13 / 28 deg, the knee sweep takes each piece's own fore-aft slab (detail F, L6B)
J	2026-10-05	yoke rev J (L6Y judges r1): the yoke as solids (model/yoke_geom.py, sheets L6Y / L6Y2) -- crown 65.3, outboard web / inboard low neck, round trim-face and shield heads (97 / 90), grips refitted per grip, toe 18 / 18, L6 / L6B take its outline and sweep pieces
K-L	2026-10-05	yoke rev K / L (L6Y judges r2 / r3): exact 2-D fields, switches as solids, grip planes fitted to the photos, head zones, C2 outlines; knee sweep fixed (a grip band was dropped)
M	2026-10-05	owner: L6Y rev O approved as the 3-D basis; the 95th's 24 level (< 25, criterion kept), contact 12.5 deg: ACCEPTED AS MEASURED; yoke rev M (judges r4 draining cleanup)
N	2026-10-11	owner 2026-10-11 (yoke 3-D judges r1): yoke push travel 65 (was 90 [E]; the grips reached the lower panel at full push + roll), pull 90 kept -- the knee sweeps and phantoms take -65 / +90; the column's J band and U recess re-centred on the column axis (L6Y2 detail J)

PILATUS PC-12 PRO

INTERIOR ARRANGEMENT - FLIGHT DECK & CABIN

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-L6	N	AS SHOWN	A1 · 1 OF 2	mm

DRAWN	DATE
Claude - loftkit parametric model	2026-10-11

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION