

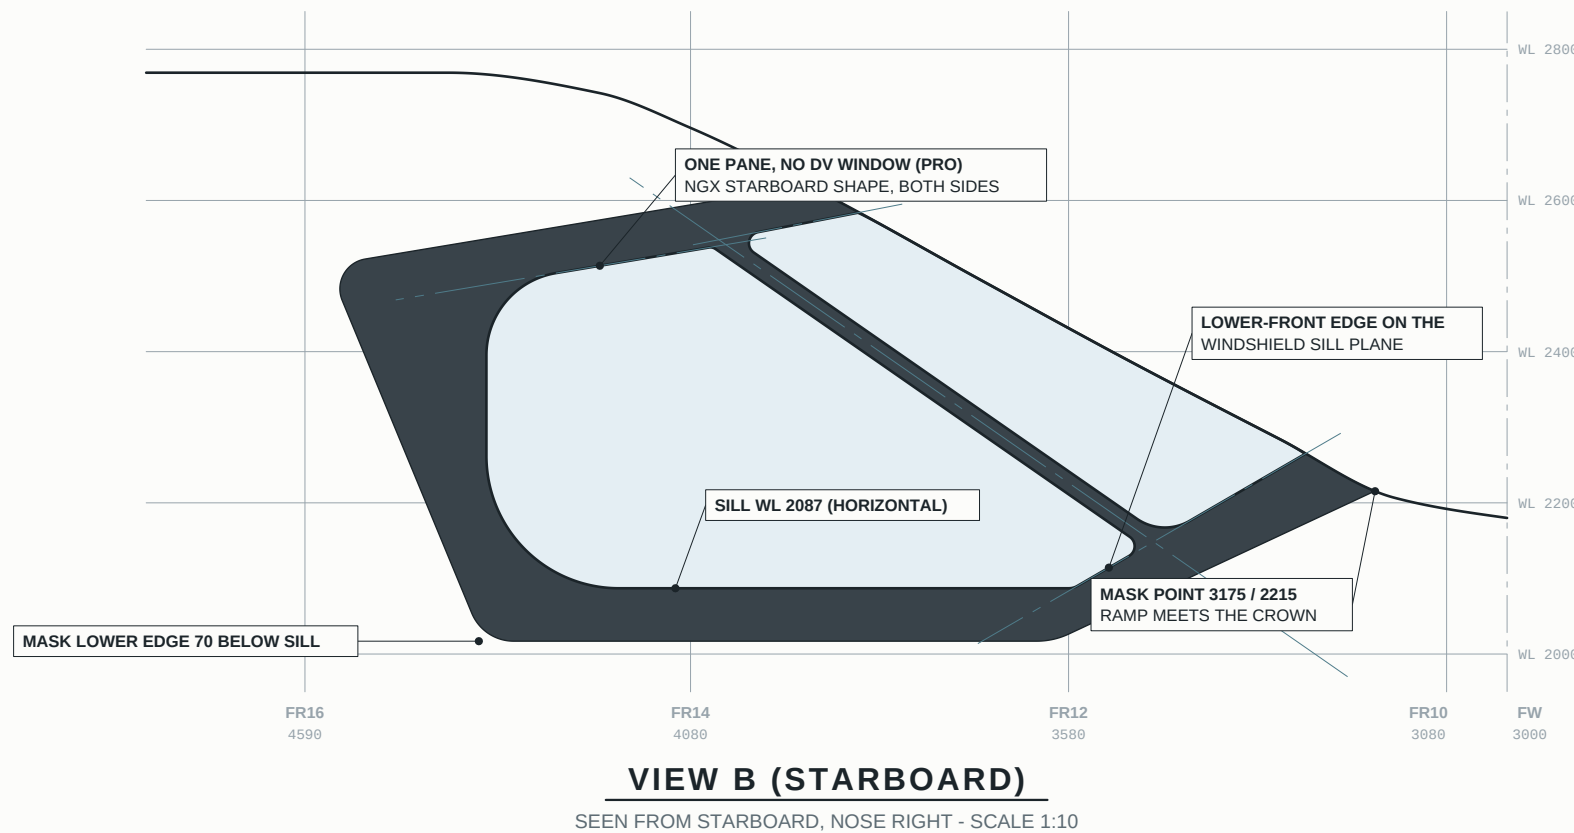
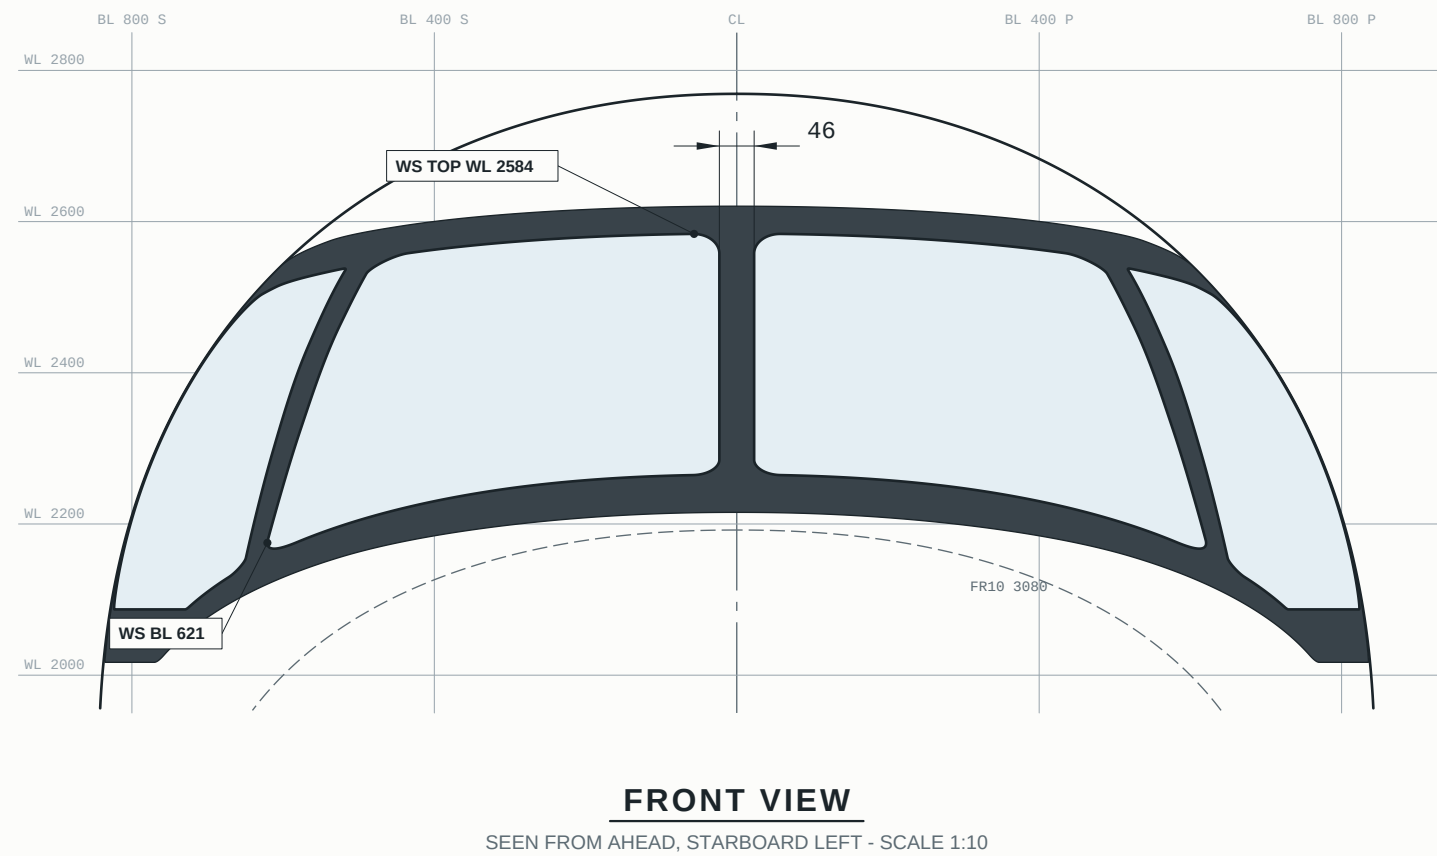


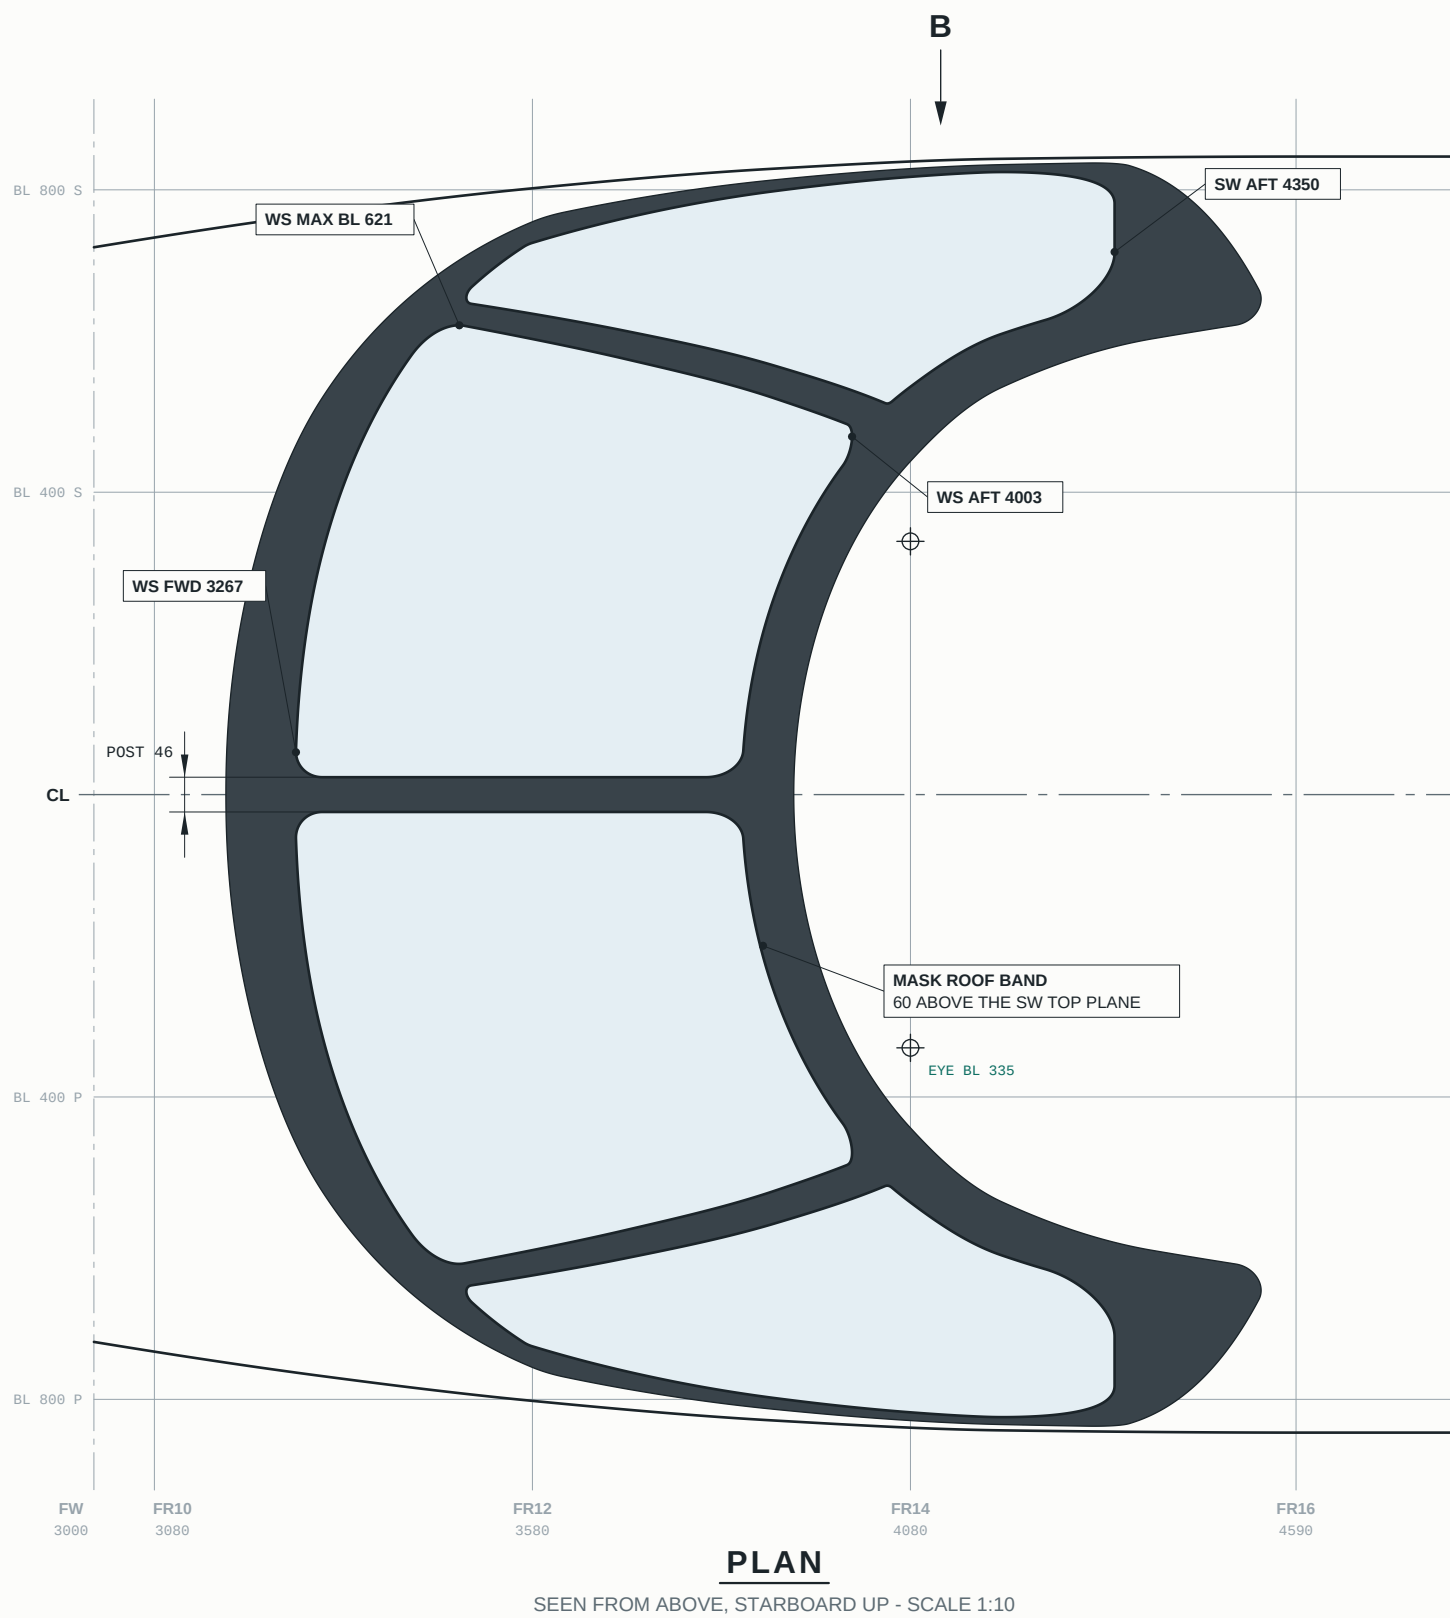

- ## NOTES

1. Drawn from the parameters of model/coskit\_glazing.py: zero contours of the glazing and mask signed-distance fields on the outer mould line of model/fuselage.py (sheet L1), projected. Never from the mesh. STA = m aft of datum (3000 mm ahead of the firewall); WL above the static ground line.
2. Every edge except the centre post is a plane normal to the plane of symmetry: straight in side projection (chain-dotted construction lines). Post |BL| = 23. Corners filleted (side projection).
3. PC-12 PRO: no direct vision window, the NGX starboard single pane is used on both sides (Pilatus PRO release; photos of s/n 3001, 3010, 3036, 3066).
4. Dark mask (filled): PRO livery item, one continuous area around all four panes - roof band, centre post, lower band with a ramp to the windshield's forward corner, straight leaning aft edge ahead of the airstair door. Drawn for the MSN 3008 scheme (edge 22.5°); the aft edges vary per airframe: model/livery.py MASK\_SCHEMES; Mask corner tip: low-aft 60, top-aft 40, ramp 100.
5. Windshield roof edge: its own plane (11.0°, 9 mm above the side-window top plane at STA 4000) - our crown section at STA 3900 is 5.12 mm fuller than the drawing's; so plan and front cannot both match a single plane better than -11.7° mm.

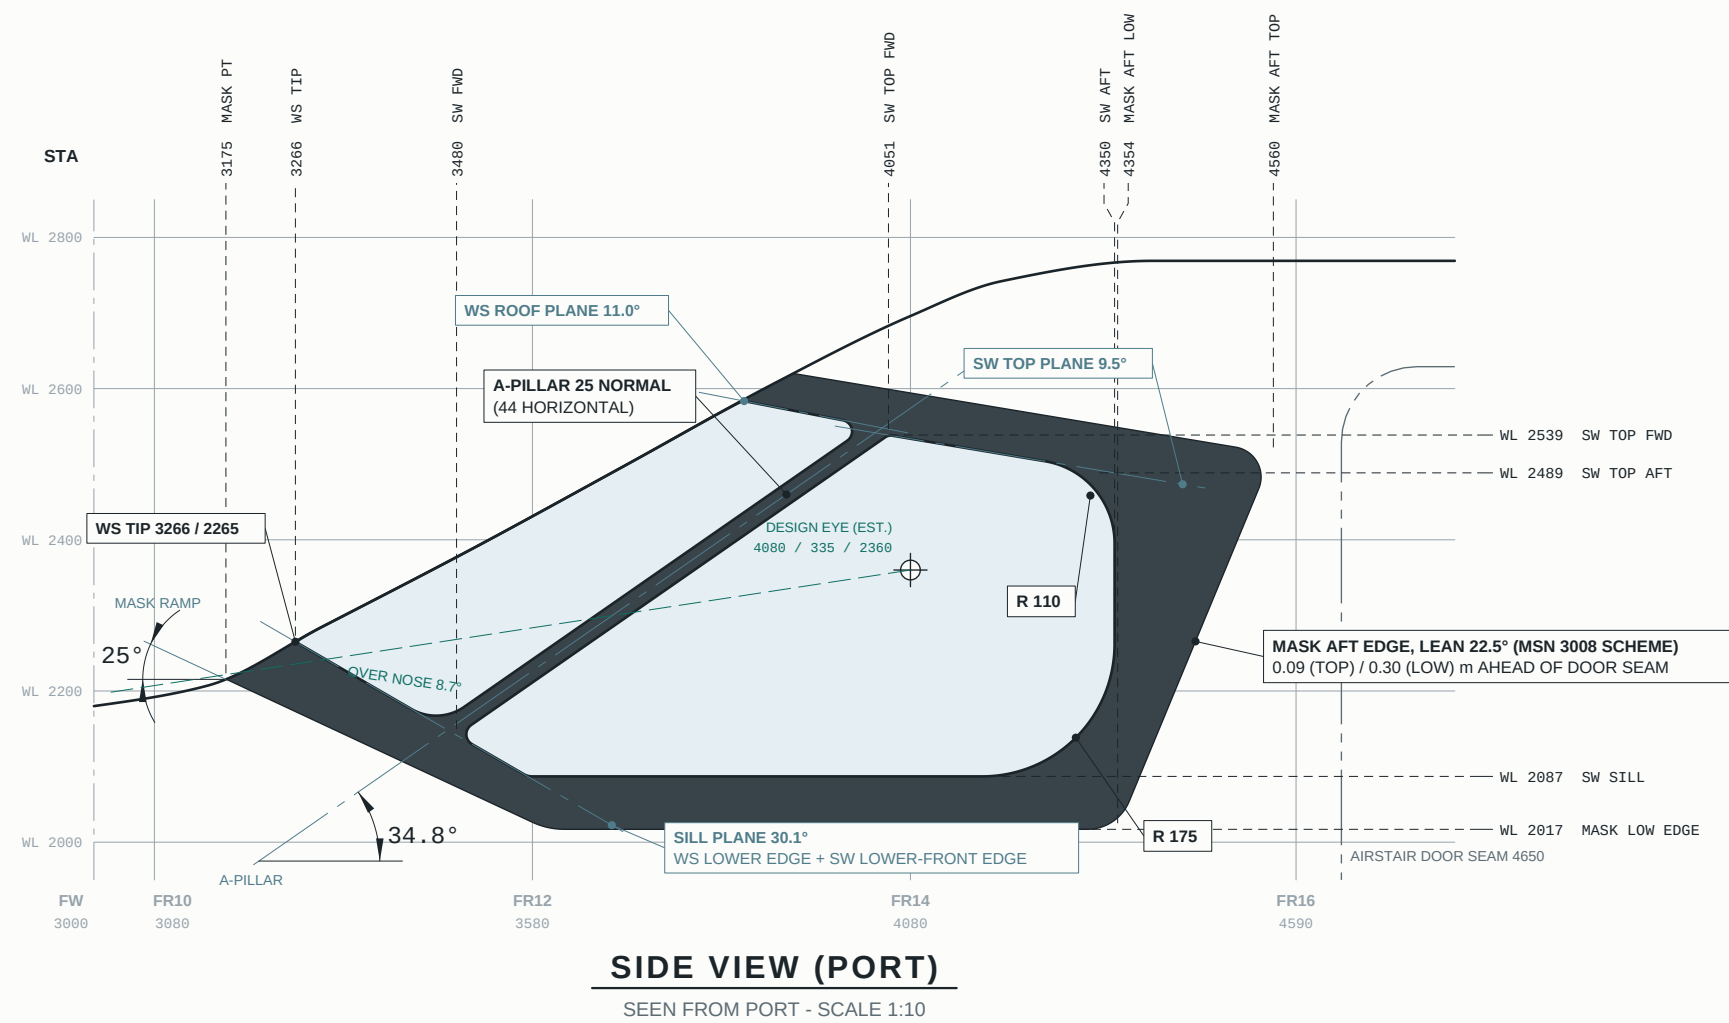


| vs PILATUS 190.10.40.432 SHEET 1 (mm) |       |                     |     |      |             |  |
|---------------------------------------|-------|---------------------|-----|------|-------------|--|
| PANE                                  | VIEW  | REFERENCE           | RMS | MAX  | WORST AT    |  |
| windshield                            | side  | ws_port             | 2.4 | 6.0  | 3267 / 2265 |  |
| side window                           | side  | NGX port DV+main    | 5.1 | 13.5 | 3654 / 2087 |  |
| side window                           | side  | sw_sbtb_dslan+QML * | 8.8 | 20.7 | 3505 / 2066 |  |
| windshield sbtd                       | plan  | ws_sbtb_d           | 5.2 | 11.4 | 3905 / 243  |  |
| windshield port                       | plan  | ws_port             | 5.2 | 11.3 | 3905 / 241  |  |
| side window sbtd                      | plan  | sw_sbtb_d           | 5.6 | 11.7 | 3814 / 590  |  |
| side window port                      | plan  | NGX port DV+main    | 6.0 | 12.2 | 3810 / 578  |  |
| windshield sbtd                       | front | ws_sbtb_d           | 4.0 | 6.7  | 226 / 2578  |  |
| windshield port                       | front | ws_port             | 4.0 | 6.6  | 223 / 2572  |  |
| side window sbtd                      | front | sw_sbtb_d           | 4.9 | 10.4 | 587 / 2382  |  |
| side window port                      | front | NGX port DV+main    | 4.8 | 13.6 | 765 / 2087  |  |

| vs PHOTOS (refs/photo_notes.md)                      |                       |               |                          |  |
|------------------------------------------------------|-----------------------|---------------|--------------------------|--|
| ITEM                                                 | PHOTOS                | OURS          | DRAWING / NOTE           |  |
| pillar edge angle                                    | 32.39 deg             | 34.8 deg      | DWG 3.14-3.6             |  |
| A-pillar width, side (horiz.)                        | 0.05-0.06             | 0.044         | dwg 0.038                |  |
| side-window sill WL                                  | 2.09-2.11             | 2.087         | DWG 2.087 (DV 2.073)     |  |
| side-window at extreme STA glass height              | -0.43                 | 4.356         | dwg 4.356                |  |
|                                                      | 0.40-0.45 (a)         | 0.451         | dwg 0.448                |  |
| sill length / height                                 | 1.98-2.09 (a)         | 1.93          | dwg 1.93                 |  |
| top length / height                                  | 0.71-0.85 (a)         | 0.66          | dwg 0.66                 |  |
| D radius top / bottom                                | 0.09-0.14 / 0.09-0.17 | 0.110 / 0.105 | DWG 0.12 / 0.21 (b)      |  |
| D straight vertical                                  | 0.15-0.19             | 0.097         | dwg 0.06 (b)             |  |
| side-window top rise (fwd)                           | 2-6 deg               | 9.5 deg       | dwg 9-10 deg             |  |
| windshield roof rise (fwd)                           | -25 deg (c)           | 11.0 deg      | dwg 10.3 deg             |  |
| centre pane to glass                                 | 0.03-0.4 (c)          | 0.046         | dwg 0.046                |  |
| mask below sill                                      | 0.05-0.08             | 0.070         | photos only              |  |
| mask ramp angle                                      | 21-27 deg             | 25.0 deg      | photos only              |  |
| mask fwd point STA / WL                              | 3.17 / 2.21           | 3.175 / 2.215 | ramp meets crown         |  |
| mask aft edge frame (f)                              | 3008: 22-26 deg       | 22.5 deg      | MSM 3008, bottom fwd     |  |
| other airframes (f)                                  | 3010: 12-16, 3036: 0  |               | 3066: curved (glass) fwd |  |
| mask at STA, WL 2.10 / 2.40                          | 3008: 4.395 / 4.515   | 4.384 / 4.513 | stbd_ground cam          |  |
| mask at margin low top                               | 0.07-0.15-0.20        | 0.004 / 0.210 | from aft extreme         |  |
| mask top margin                                      | 0.055-0.07 (e)        | 0.060         | from aft extreme         |  |
| mask aft to door seam, top / low other airframes (f) | 3008: 0.10-0.27       | 0.090 / 0.296 | seam STA 450             |  |
|                                                      | 3036: -0.05, vertical |               | reaches the door         |  |

- (a) perspective: ground-level-camera sills 10'-15" below the window; the tumblehome shortens the glass height and flattens the top edge (0.448 in @ 0.40-0.41 in; 9.5" > 2.6")
- (b) drawing vs photos conflict: kept 0.175 (within 15 mm of the drawing) - owner to decide.
- (c) the side-projection slope of the windshield's outboard roof corner, not the roof plane.
- (d) indicative only (oblique views).
- (e) ratio to the glass height on PRO sn 3010 / 3036 and the long-lens NGX photo (photo, notes: 0-0.05).
- (f) the mask's alt edge is a livey item and differs per airframe (model/livery, py MASK\_SCHMEMES; sn 3008 photos rectified on the OML (stbd\_jdrow / port\_hangar\_130 cameras); this sheet and L5 carry sn 3008

| VISION FROM THE DESIGN EYE (ESTIMATED) |                   |
|----------------------------------------|-------------------|
| design eye STA / BL / WL               | 4080 / 335 / 2360 |
| over the nose (eye BL ahead)           | 8.7° down         |
| abeam, over the side-window sill       | 29.5° down        |
| abeam, to the side-window top          | 40.3° up          |
| ahead, to the windshield roof edge     | 54.4° up          |



|                                                                    |     |       |             |                                                                                                                     |  |
|--------------------------------------------------------------------|-----|-------|-------------|---------------------------------------------------------------------------------------------------------------------|--|
| <h1>PILATUS PC-12 PRO</h1> <h2>COCKPIT GLAZING &amp; PRO MASK</h2> |     |       |             |  <p>FIRST ANGLE PROJECTION</p> |  |
| DWG NO                                                             | REV | SCALE | SHEET       | UNITS                                                                                                               |  |
| PC12-L2                                                            | A   | 1:10  | A2 · 1 OF 1 | mm                                                                                                                  |  |
| DRAWN                                                              |     |       |             | DATE                                                                                                                |  |
| Claude - loftkit parametric model                                  |     |       |             | 2026-09-24                                                                                                          |  |
| RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION          |     |       |             |                                                                                                                     |  |