Binary Classification of AOI Alarms into True Defects and False Calls

Second check of AOI results with supervised machine learning (Siemens production data)

P2: core code and baseline simulation · test plan · report

Yu Han · Melisa Subasi · Meron Hagos · Alejandro Rivas

Team 1 · Guided by Prof. Dr.-Ing. Hamidreza Heidari · 3 November 2026 · github.com/bodhi584/aoi-false-call-classification

Yu Han

All three P2 deliverables are in the repository

P2 requirement (lecture)	Status	Where
Core code + baseline simulation	done	aoi_classification/, scripts/replicate_pfab2025.py
Test plan	done	docs/test_plan.md
Report (bibliography report)	done, 31 sources	docs/literature_report.pdf

What changed since P1

P1: build a second check after AOI and test it in time order.

Literature review: on the same Siemens data, such a check already fails on later production days (Pfab & Rothering 2025).

P2 question: does periodic retraining keep the second check working over time?

Method: repeat their experiment one-to-one and change only one thing, retraining.

Melisa Subasi

AOI false calls are a real and current problem

≈ 99 %

of the solder joints flagged by AOI are false calls

Each flagged board is checked again by hand. Source: Pfab & Rothering (2025); data: Pfab et al. (2024), one Siemens SMT line, 132 days

Zero-defect manufacturing needs detection [1]

AOI checks every solder joint with a camera and fixed limits [2]; machine learning at the inspection step is an active field [3].

Manual workload [5]

Every flagged board goes to the manual inspection station; many are good boards.

Siemens and NVIDIA, Erlangen, Oct 2026 [4]

A second inspection step decides: real defect or false call. Target: 40 % fewer false calls (a target, not a result).

TECHNISCHE HOCHSCHULE DEGGENDORF THD

Meron Hagos

A second check with machine learning works on a test set

Study	Data	Classifiers	Result
Thielen et al. 2020 [6]	not public	kNN, neural network, random forest	false calls recognised; RF and NN best on large data
Albayari et al. 2026 [7]	Siemens AG	XGBoost, RF, DNN, kNN	XGBoost best balance of recall and precision
Pfab & Rothering 2025 [8]	Siemens, public	kNN, RF, balanced RF, XGBoost, AutoML	RF and balanced RF meet the targets on the test set

Which classifiers? [9]–[14]


On tabular data, tree ensembles (random forest, gradient boosting) are the strongest family in five benchmark studies.

But: tested on data from the same period

None of these studies keeps the model running on later production days, except [8].

Alejandro Rivas

… but fails on later production days: drift

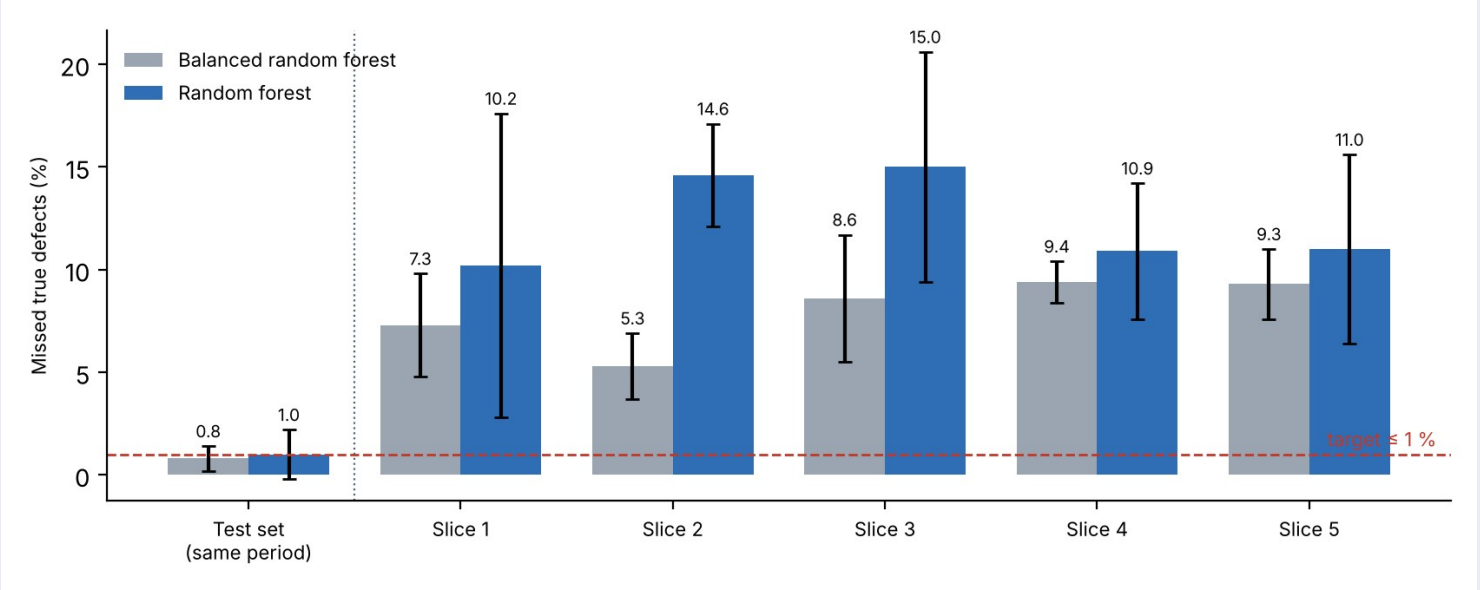

Why? Drift [22]–[28]

Pfab & Rothering: on target on the test set, 5–15 % missed defects on all five later slices.

Drift = the data change over time; a model trained on old data no longer fits [22]–[24].

Same effect in manufacturing: welding, semiconductor etch, sensors [25]–[27].

The paper also names an unstable threshold method.

Yu Han

Chain of evidence

Fails over time

train once → 5–15 % missed defects later [8]

Cause: drift

theory and manufacturing cases [22]–[28]

Remedy

periodic retraining is the baseline in drift research [23], [24], [28]

Works elsewhere

fraud detection, <1 % positives [30]; semiconductor materials line [31]

Open for AOI

not tested for the second check of AOI results

Our research question

Does periodic retraining keep the second check of AOI results within ≤ 1 % missed true defects and ≥ 40 % fewer manual checks on later production days?

TECHNISCHE HOCHSCHULE DEGGENDORF THD

Yu Han

Same system, sharper question and criteria

INPUT

AOI alarm: AOI measurements of each flagged solder joint

SYSTEM

Binary classifier after the AOI, retrained during production

OUTPUT

True defect → manual inspection · false call → released

	P1 (23 Oct)	P2 (now)
Question	build a second check and test it in time order	does periodic retraining keep it working over time?
Criteria	board level: recall ≥ 99 %, specificity ≥ 20 %	joint level, as in [8]: missed defects ≤ 1 %, false calls released ≥ 40 %
Why	own targets	one-to-one comparison with [8]

Yu Han

One-to-one replication of Pfab & Rothering (2025) + retraining


	(a) Paper exactly	(b) Train once, threshold re-estimated	(c) Retrain
Data split	same as [8]	same	same
Models, hyper-parameters, seeds	RF, balanced RF; logged values; 10 seeds	same	same
Threshold	value logged in [8]	their method, applied to the final model	same method, new data
Training	once	once	before each of the 5 later slices
Purpose	reproduce [8]	fair baseline	(b) vs (c) = effect of retraining

Metrics on joint level, as in [8]: missed true defects (slip = 1 − recall) and false calls released (volume reduction = specificity). Assumption: manual-inspection labels are available for all joints (upper bound for retraining).

TECHNISCHE HOCHSCHULE DEGGENDORF

Alejandro Rivas

The line changes over time

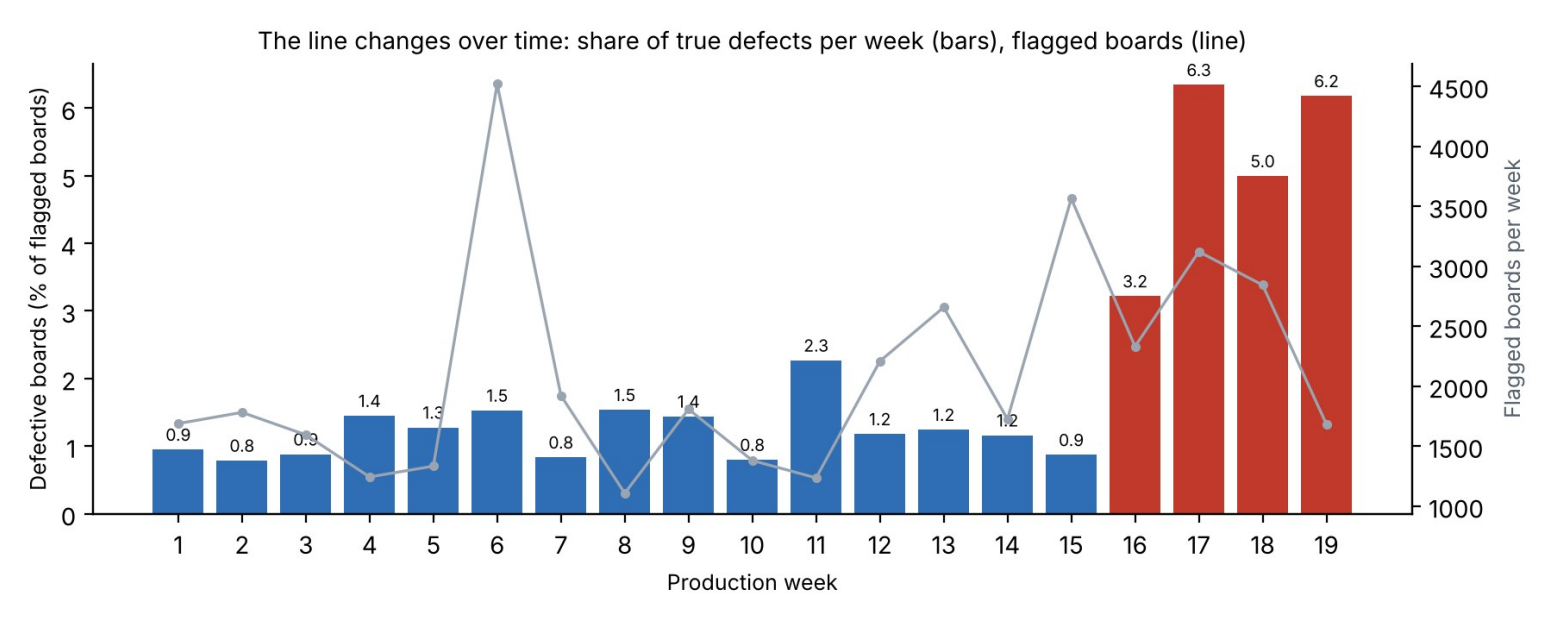

Facts (our analysis)

440,274 flagged joints, 39,742 boards, 132 days

97.8 % of flagged boards are false calls

Share of defective boards: 0.8–2.3 % per week, then 3.2–6.3 % in the last 4 weeks

Drift test: early vs. late days separable, AUROC 0.974

Yu Han


What runs in the repository

Part	File	What it does
Data	aoi_classification/data.py	load the Siemens data, boards, time order
Classifier + threshold	aoi_classification/model.py	train, score, threshold for 99 % recall
Baseline simulation	aoi_classification/simulation.py	day by day: train on earlier days only
Replication	scripts/replicate_pfab2025.py	one-to-one repeat of [8], train once vs. retrain
Classifier screening	scripts/compare_classifiers.py	13 classifiers, 8 families, same split
Tests + CI	tests/, GitHub Actions	10 tests on Windows, macOS, Linux

Tools: Python, pandas, scikit-learn, imbalanced-learn, matplotlib, Jupyter · Data: Mendeley (CC BY-NC 3.0), not stored in the repo

Yu Han

Replication works; retraining helps a little, target not reached yet

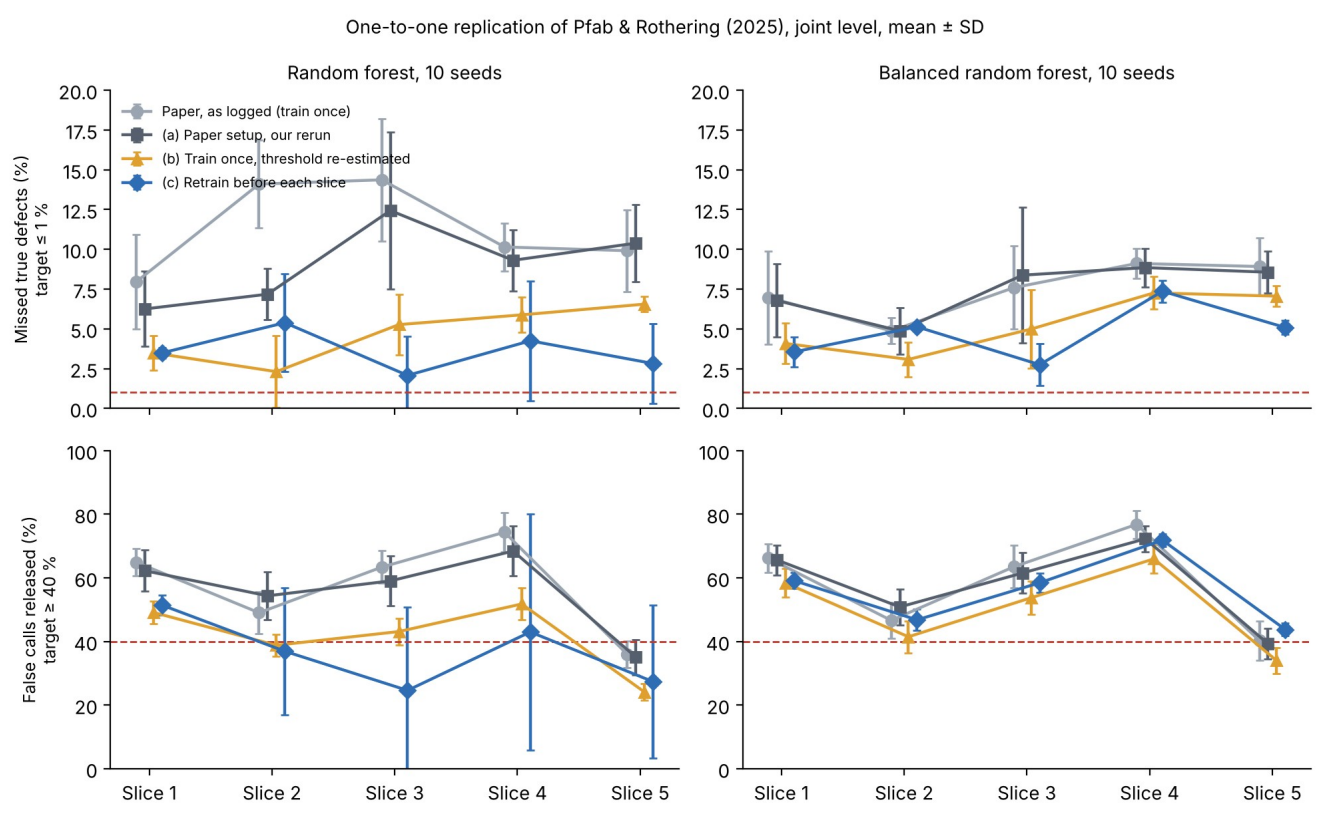

Reproduction ✔

Balanced RF: 7.5 % missed defects, as in [8].

Retraining: small gain

Balanced RF: 5.3 → 4.8 % missed, 50.7 → 56.0 % released.

RF: 4.7 → 3.6 % missed, but fewer released.

Threshold matters most

Correct threshold alone: 7.5–9.1 → 4.7–5.3 % missed.

No variant reaches ≤ 1 % yet.

Melisa Subasi

How we check the code and the numbers

Group	Examples	Status
Data (D1–D7)	labels 0/1, no missing values, time order, checksum	4 exist, rest P3
Classifier + threshold (C1–C7)	threshold rule, all models run, same seed = same result	4 exist, rest P3
Simulation (S1–S4)	model only knows earlier days	1 exists, rest P3
Replication (R1–R4)	same split as [8]; (a) reproduces [8]; retraining uses only earlier data; 10 seeds	new
KPIs (K1–K5)	missed defects ≤ 1 %, false calls released ≥ 40 %; every number from results/	open

Unit tests run on every push (CI, three operating systems). A KPI that is not reached is a result, not a failed test.

Meron Hagos

Towards P3 (24 Nov)

Retraining frequency

daily, every 3 days, weekly, per slice: how far do missed defects drop? [31]

Threshold on recent data

set the threshold on the latest days, not on all history [21]

More model families

gradient boosting, neural network, logistic regression in the same setup

Simulation tool

one screen: choose the retraining frequency, see missed defects and saved checks

KEY REFERENCES

Full list (31 sources) in docs/literature_report.pdf

[5] Pfab, K. et al. (2024). Data of automated optical inspection of surface-mounted technology electronic production. Data in Brief 53, 110110.

[8] Pfab, K., Rothering, M. (2025). Towards improved research methodologies for industrial AI: a case study of false call reduction. arXiv:2506.14521.

[22] Moreno-Torres, J. G. et al. (2012). A unifying view on dataset shift in classification. Pattern Recognition 45, 521–530.

[23] Gama, J. et al. (2014). A survey on concept drift adaptation. ACM Computing Surveys 46(4), 44.

[24] Lu, J. et al. (2019). Learning under concept drift: a review. IEEE TKDE 31(12), 2346–2363.

[30] Dal Pozzolo, A. et al. (2018). Credit card fraud detection: a realistic modeling and a novel learning strategy. IEEE TNNLS 29(8), 3784–3797.

[31] Gao, M. et al. (2026). Robust and reliable AI for predictive quality in semiconductor materials manufacturing with MLOps and uncertainty quantification. arXiv:2605.07752.

TECHNISCHE HOCHSCHULE DEGGENDORF

Repository

github.com/bodhi584/aoi-false-call-classification

Thank you

Team 1 · Yu Han · Melisa Subasi · Meron Hagos · Alejandro Rivas