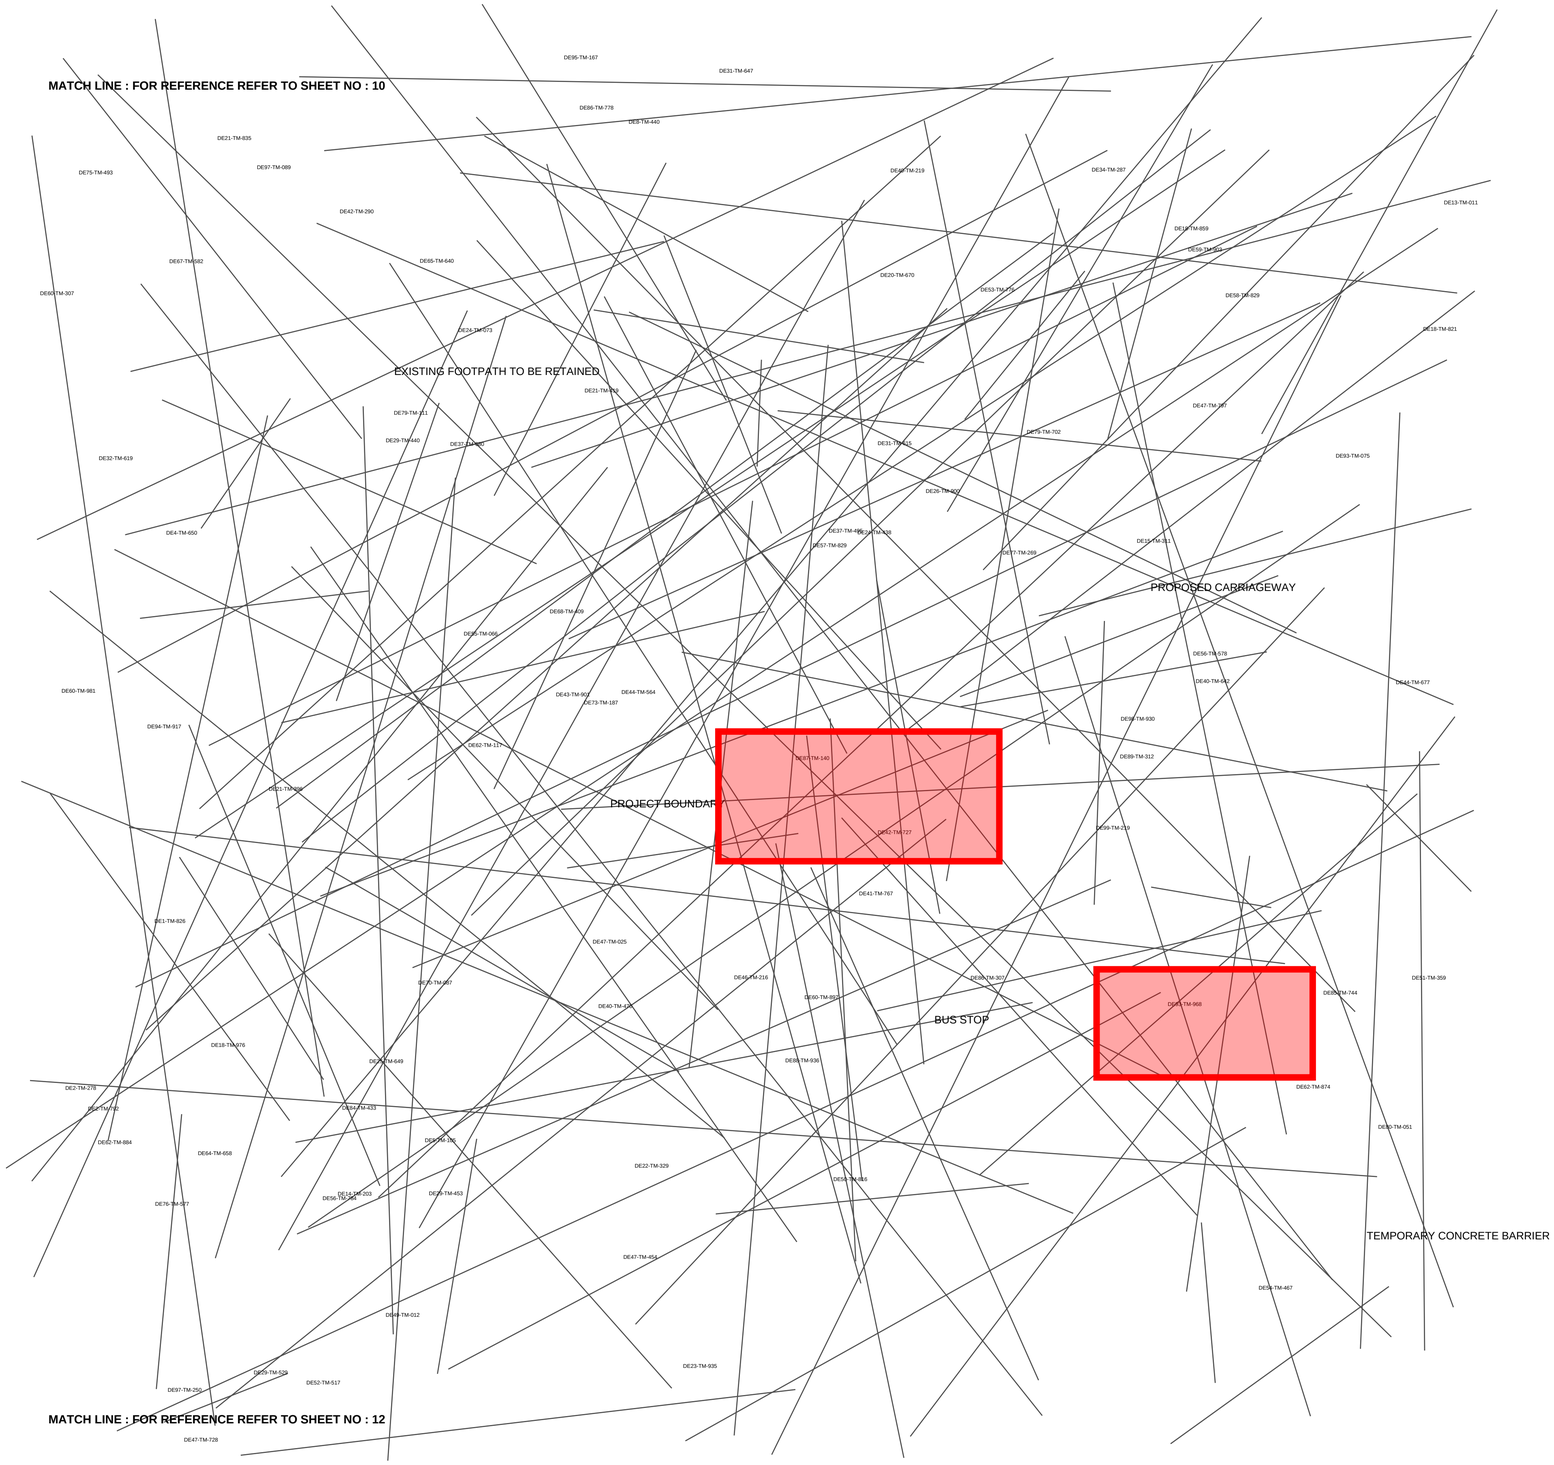

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE NOTED.
2. COORDINATES ARE IN WGS-84 / UTM ZONE 37N; LEVELS ARE TO THE PROJECT DATUM.
3. TEMPORARY TRAFFIC SIGNS SHALL BE INSTALLED BEFORE ANY WORK STARTS ON THE CARRIAGEWAY.
4. ALL BARRIERS SHALL BE INSPECTED DAILY AND REINSTATED WHERE DISPLACED.
5. PEDESTRIAN ROUTES SHALL BE KEPT OPEN AND SEPARATED FROM THE WORKS AT ALL TIMES.
6. THE CONTRACTOR SHALL SUBMIT A TRAFFIC MANAGEMENT METHOD STATEMENT FOR APPROVAL.
7. FOR THE OVERALL ARRANGEMENT REFER TO KEY PLAN PK-INF-001-0000-FRM-DWG-TM-200-0015001.

LEGEND:

EXISTING KERB LINE
PROPOSED KERB LINE
TEMPORARY CONCRETE BARRIER (TCB)
WATER-FILLED BARRIER
TRAFFIC CONE AT 5 M CENTRES
ADVANCE WARNING SIGN
DIVERSION ROUTE ARROW
PEDESTRIAN CROSSING POINT
FLAGMAN POSITION
WORK ZONE LIMIT
SAFETY BUFFER ZONE 10 M
STREET LIGHT TO BE PROTECTED
EXISTING SERVICE CORRIDOR
TEMPORARY ACCESS FOR EMERGENCY VEHICLES

PROJECT: SAMPLE ROAD UPGRADE
CLIENT: EXAMPLE DEVELOPMENT AUTHORITY
LOCATION: SAMPLE REGION
CONSULTANT: Sample Design Consultant
DRAWN BY: DRAFTER A
CHECKED BY: CHECKER B
SCALE: 1:500
SHEET: 11 OF 20
INFRASTRUCTURE DESIGN PACKAGE

TRAFFIC MANAGEMENT DETAIL

PK-INF-001-0000-FRM-DWG-TM-200-1100010-A