

Supplementary information

Identifiability of spatial relations under geodetic datum and reference-frame loss

S1 Formal assumptions and degeneracies

The distance result assumes a labeled Euclidean distance matrix of embedding dimension at most three. Sparse graphs may admit flexes or multiple discrete realizations. Repeated points, collinear or coplanar simplices, axis-pole locations, and projected antipodes are treated as degeneracies rather than forced directional classifications.

Generic axial ordering requires an origin and a directed axis. An undirected axis leaves its labels exchangeable. Signed relative longitude requires a physically recoverable chiral witness; absolute angular origin requires an additional directed meridian. A stored orientation bit without recoverable physical meaning does not remove the reflection ambiguity.

S2 Computational algorithms

Classical multidimensional scaling uses the three largest positive eigenpairs of the double-centered squared-distance matrix. Procrustes alignment uses a singular-value decomposition and explicitly constrains the determinant when reflection is forbidden. Direction signs are evaluated from normalized axial projections and a two-argument arctangent on the principal branch. The rigidity analysis uses numerical rank of the three-dimensional rigidity matrix with an SVD tolerance scaled by matrix dimensions and machine precision.

S3 Reproducibility configuration

```
seed: 20260924
synthetic:
  n_points: 24
  n_frame_trials: 250
  monte_carlo_trials: 4000
  ellipsoid:
    name: WGS84
    semi_major_axis_m: 6378137.0
    inverse_flattening: 298.257223563
  ellipsoid_sensitivity:
    name: GRS80
    semi_major_axis_m: 6378137.0
    inverse_flattening: 298.257222101
  anchor_corruption_probabilities: [0.0, 0.01, 0.05, 0.1, 0.2, 0.4]
  angular_noise_degrees: [0.0, 0.01, 0.05, 0.1, 0.25, 0.5]
rigidity:
  n_points: [6, 8, 10, 12, 16]
  edge_probabilities: [0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0]
  trials: 2000
  seed_offset: 1000
real_data:
  source: data/raw/itrf2020/ITRF2020_SLR.SSC.txt
  reference_epoch: 2015.0
  comparison_epoch: 2025.0
```

max_coordinate_sigma_m: 0.02
n_sites: 16

S4 ITRF2020 selected stations

Table 1 Selected ITRF2020 SLR stations and epochs.


Domes	Site Name	Technique Id	Latitude Degrees	Longitude Degrees	Reference Epoch	Comparison Epoch
40445M004	MAUI	7119	20.579588011218 565	- 156.25692679418 262	2015.0	2025.0
40497M001	Monument Peak	7110	32.716542819713	- 116.42267844996 38	2015.0	2025.0
40442M006	FORT DAVIS	7080	30.511709811171 1	- 104.01519959418 388	2015.0	2025.0
40451M105	Washington	7105	38.832489931176 98	- 76.827696865270 3	2015.0	2025.0
48081S001	Campus Universi	7407	- 15.672698118831 36	- 47.865293380631 69	2015.0	2025.0
13402S007	SAN FERNANDO	7824	36.281493674428 57	- 6.2053067139107 8	2015.0	2025.0
14001S007	Zimmerwald	7810	46.685207706588 57	7.4652245169000 16	2015.0	2025.0
30302M003	Hartebeesthoek	7501	- 25.738878389355 69	27.686177286269 704	2015.0	2025.0
25603S001	Baikonur Cosmod	1887	45.512591798649 86	63.342416825669 55	2015.0	2025.0
12372S001	Altay	1879	51.156047352699 42	82.177298365774 05	2015.0	2025.0
12338S004	Badary	1890	51.582834803229 39	102.23536268348 586	2015.0	2025.0
50107M001	Yarragadee	7090	- 28.883434983501 672	115.34675330293 4	2015.0	2025.0
50119S003	Mount Stromlo	7825	- 35.134828841931 21	149.00988228866 52	2015.0	2025.0
12734S008	Matera	7941	40.458577942210	16.704614547110	2015.0	2025.0

Domes	Site Name	Technique Id	Latitude Degrees	Longitude Degrees	Reference Epoch	Comparison Epoch
			4	5		
13212S001	Herstmonceux Ca	7840	50.67885528360768	0.3361285649584317	2015.0	2025.0
10002S002	Grasse (OCA)	7845	43.56246101585594	6.921576461282378	2015.0	2025.0


S5 Incomplete-network and ellipsoid sensitivity

Table S1 WGS84–GRS80 sensitivity for the seeded point set.

Metric	Value	Unit
ellipsoid_maximum_coordinate_difference_m	0.0001210656051966	m
ellipsoid_median_coordinate_difference_m	0.0001025915363387	m
ellipsoid_maximum_chord_distance_difference_m	0.0002250224351882	m
ellipsoid_median_chord_distance_difference_m	4.020938649773598e-05	m
ellipsoid_axial_ordering_agreement	1.0	proportion
ellipsoid_signed_longitude_agreement	1.0	proportion

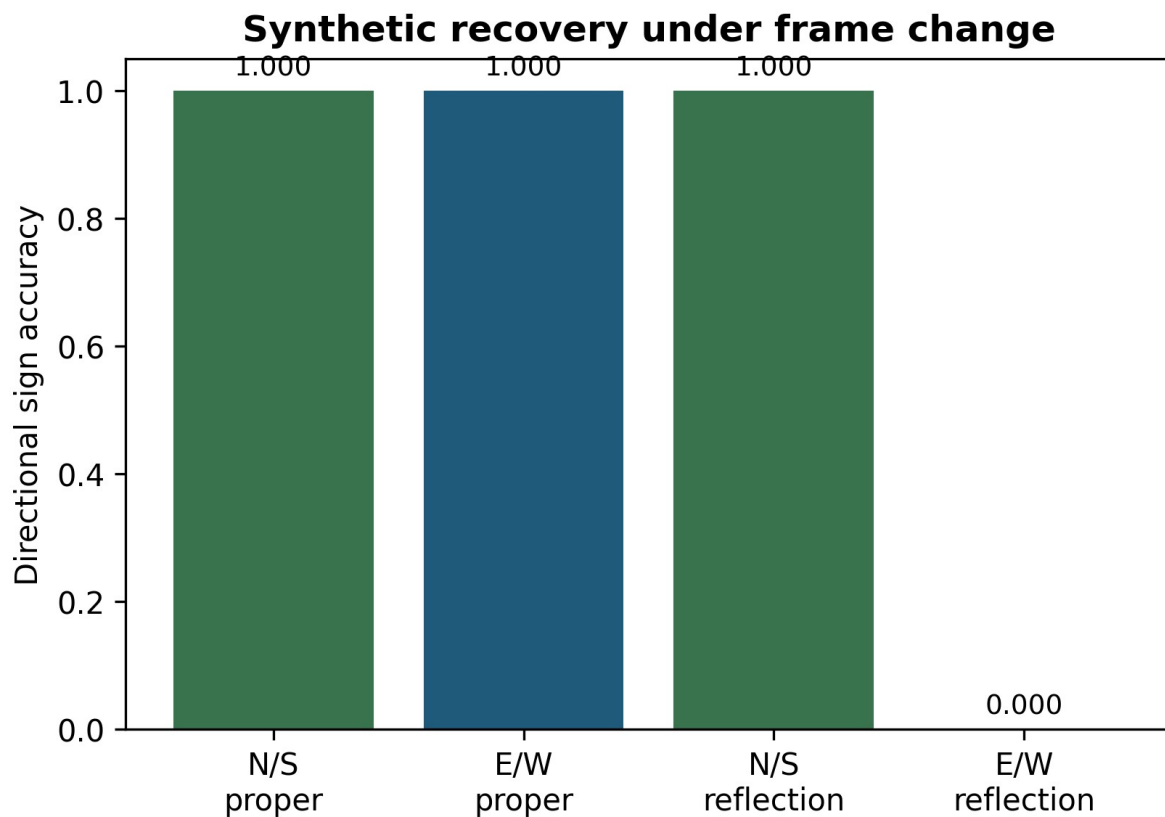

Supplementary Fig. S1 Synthetic theorem-validation benchmark. Proper rotations preserve both tested directional signs; axial reflection preserves axial ordering and reverses signed longitude.

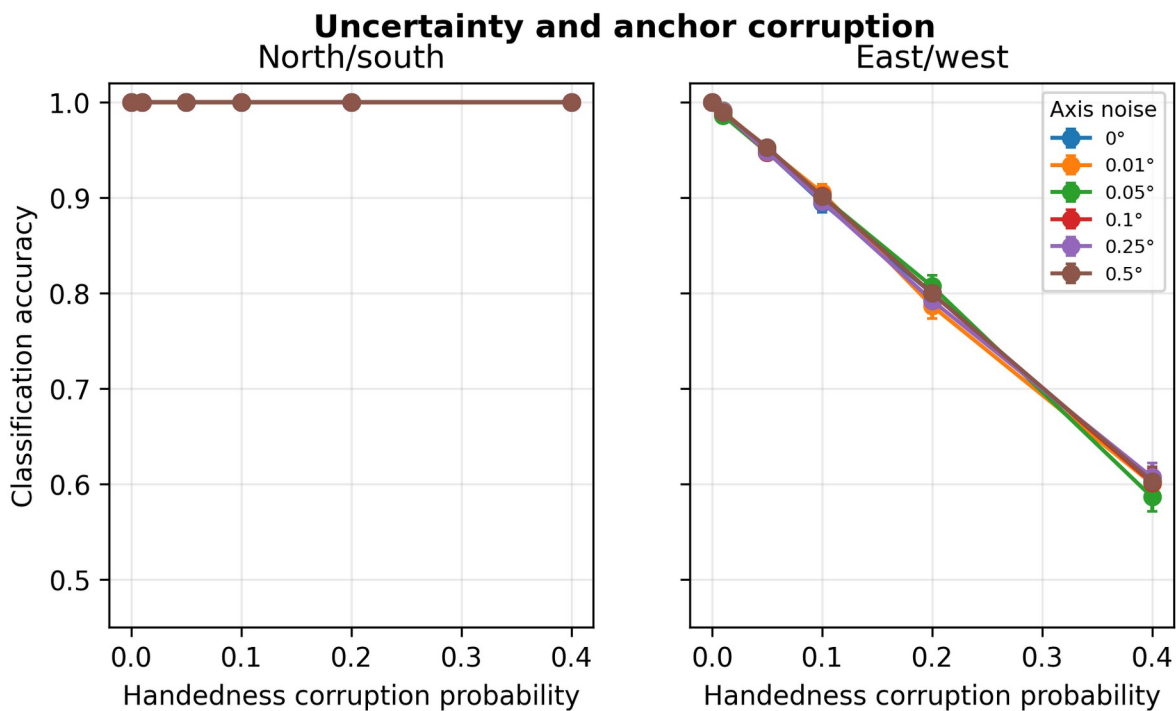

Supplementary Fig. S2 Seeded axis-noise and algebraic-orientation-corruption experiment. The curves are conditional simulation checks and are not estimates of physical anchor survival.

S6 Numerical result registry

Table S2 Machine-generated values used in the manuscript.

Metric	Value	Source	Unit
synthetic_number_of_points	24.0	synthetic_benchmark	proportion_or_m
synthetic_frame_trials	250.0	synthetic_benchmark	proportion_or_m
synthetic_monte_carlo_trials_per_condition	4000.0	synthetic_benchmark	proportion_or_m
distance_reconstruction_rmse_all ow_reflection_m	2.970170222267324e-09	synthetic_benchmark	proportion_or_m
distance_reconstruction_rmse_pr oper_only_m	6136173.251345326	synthetic_benchmark	proportion_or_m
proper_rotation_north_south_acc uracy	1.0	synthetic_benchmark	proportion_or_m
proper_rotation_east_west_accu ra cy	1.0	synthetic_benchmark	proportion_or_m
reflection_north_south_accuracy	1.0	synthetic_benchmark	proportion_or_m
reflection_east_west_accuracy	0.0	synthetic_benchmark	proportion_or_m
n_selected_sites	16.0	itrf2020_demonstration	count
maximum_coordinate_standard_u ncertainty_m	0.02	itrf2020_demonstration	m
distance_reconstruction_rmse_m	3.613275939091764e-09	itrf2020_demonstration	m
axial_reflection_north_south_acc uracy	1.0	itrf2020_demonstration	proportion
axial_reflection_east_west_accu ra cy	0.0	itrf2020_demonstration	proportion
maximum_pairwise_distance_cha nge_m	0.6906252605840564	itrf2020_demonstration	m
median_pairwise_distance_chang e_m	0.0907241012901067	itrf2020_demonstration	m
reference_epoch	2015.0	itrf2020_demonstration	decimal_year
comparison_epoch	2025.0	itrf2020_demonstration	decimal_year
random_seed	20260924.0	configuration	integer
ellipsoid_maximum_coordinate_d ifference_m	0.0001210656051966	ellipsoid_sensitivity	m
ellipsoid_median_coordinate_diff erence_m	0.0001025915363387	ellipsoid_sensitivity	m
ellipsoid_maximum_chord_distan ce_difference_m	0.0002250224351882	ellipsoid_sensitivity	m
ellipsoid_median_chord_distance _difference_m	4.020938649773598e-05	ellipsoid_sensitivity	m

Metric	Value	Source	Unit
ellipsoid_axial_ordering_agreement	1.0	ellipsoid_sensitivity	proportion
ellipsoid_signed_longitude_agreement	1.0	ellipsoid_sensitivity	proportion
rigidity_largest_network_n_points	16.0	rigidity_phase_diagram	count
rigidity_trials_per_cell	2000.0	rigidity_phase_diagram	count
rigidity_95pct_threshold_edge_probability	0.6	rigidity_phase_diagram	probability
rigidity_probability_at_95pct_threshold	0.996	rigidity_phase_diagram	proportion
rigidity_95pct_threshold_95ci_lower	0.992126535703962	rigidity_phase_diagram	proportion
rigidity_95pct_threshold_95ci_upper	0.9979717533930348	rigidity_phase_diagram	proportion
rigidity_edge_probability_before_95pct_threshold	0.5	rigidity_phase_diagram	probability
rigidity_probability_before_95pct_threshold	0.9465	rigidity_phase_diagram	proportion
rigidity_probability_before_95pct_threshold_95ci_lower	0.935754264314357	rigidity_phase_diagram	proportion
rigidity_probability_before_95pct_threshold_95ci_upper	0.955533812463484	rigidity_phase_diagram	proportion
north_south_accuracy_at_0.1_chirality_corruption	1.0	uncertainty_benchmark	proportion
east_west_accuracy_at_0.1_chirality_corruption	0.895	uncertainty_benchmark	proportion
east_west_accuracy_at_0.1_chirality_corruption_95ci_lower	0.8851180041126476	uncertainty_benchmark	proportion
east_west_accuracy_at_0.1_chirality_corruption_95ci_upper	0.9041240356884884	uncertainty_benchmark	proportion
north_south_accuracy_at_0.4_chirality_corruption	1.0	uncertainty_benchmark	proportion
east_west_accuracy_at_0.4_chirality_corruption	0.60225	uncertainty_benchmark	proportion
east_west_accuracy_at_0.4_chirality_corruption_95ci_lower	0.5869914415518415	uncertainty_benchmark	proportion
east_west_accuracy_at_0.4_chirality_corruption_95ci_upper	0.6173123522954146	uncertainty_benchmark	proportion

S7 Test coverage

The automated suite covers rigid-transform distance invariance, independent proper and reflection-permitting alignment, simplex chirality, local ENU basis orthonormality, proper-rotation direction invariance, axial-reflection direction asymmetry, branch wrapping, same-meridian ties, pole and exact/near-antipode degeneracies, rigidity rank, ITRF parsing and site count, configuration-dependent epoch labels, nondefault uncertainty grids, and seeded reproducibility.

S8 Interpretation of main numerical values

The proper-only mirror ambiguity is 6.136 million m for the seeded point set. This value characterizes the selected configuration and is not a universal Earth-scale constant.

The local-rigidity frequencies are Monte Carlo summaries for independently sampled generic points and Bernoulli edge retention. They do not establish global rigidity, geodetic network optimality, or a universal density threshold.