

NANYA CNC



CATALOGUE



NANYA CNC ENTERPRISE CO. LTD

COMPANY INTRODUCTION



NANYA EXCELLENCE IN CNC MACHINING SOLUTIONS

Founded in 2010, NANYA(NYCNC) has rapidly established itself as a premier manufacturer of CNC machining centers, recognized globally for delivering high-quality, reliable, and efficient manufacturing solutions.



TECHNOLOGY THAT DELIVERS

In today's competitive manufacturing environment, precision and productivity are non negotiable. Our CNC machining centers are engineered with advanced technology and cutting edge features that deliver consistent, efficient, and accurate machining operations.



GLOBAL EXCELLENCE, LOCAL EXPERTISE

Our machining centers combine the best of international manufacturing: produced in China with precision components sourced from Taiwan, Germany, and Japan. This strategic approach leverages world-class R&D resources and ensures adherence to the most stringent international quality standards.



CUSTOMIZED APPROACH

Our experienced engineering team works in partnership with clients to develop tailored solutions that address specific operational requirements. From initial consultation through comprehensive after sales support including training, maintenance, and technical assistance we ensure long term success for every customer.

2010 since

we have offered a comprehensive range of CNC machines including vertical & horizontal machines center, double column machines center, vertical lathe, automatic lathe slant bed/gang type, and surface grinders.



PRECISION-ENGINEERED SOLUTIONS

Understanding that precision and productivity drive success in modern manufacturing, we equip our CNC machining centers with advanced technology and innovative features designed for optimal performance across demanding applications.



CONTINUOUS INNOVATION

We invest substantially in research and development to stay ahead of industry trends and technological evolution. Our focus on innovation drives the development of new features and functionalities that continuously improve the efficiency, reliability, and versatility of our product line.



INDUSTRY TRUST

Our machines serve critical applications across automotive, aerospace, electronics, and numerous other industries, helping organizations worldwide achieve their manufacturing goals and maintain competitive advantage.



APPLICATIONS AND CAPABILITIES

Nanya 3-axis machine centers are well suited for flat surface machining, contouring, drilling, and tapping. They are commonly used for mold and die work, prototype development, and small to medium-scale production, offering a practical and reliable solution for everyday machining tasks.



MAXIMIZING YOUR INVESTMENT

To get the most from your Nanya CNC 3-axis machine center, it is important to follow a regular preventive maintenance schedule to keep the machine running smoothly and extend its lifespan. Proper operator training helps ensure the machine is used correctly and efficiently, while selecting the right cutting tools and holders improves accuracy and overall machining results. In addition, optimizing programs with CAM software allows you to create efficient toolpaths, reduce cycle times, and improve productivity.

QUALITY ASSURANCE & CERTIFICATION:

At NANYA (NYCNC), every machine is built to meet the highest standards of precision and reliability. Our comprehensive testing process ensures optimal performance across vertical, horizontal, turning, and grinding applications.

Each unit undergoes rigorous inspection including scraping, mechanical accuracy, circularity, ball bar calibration, laser alignment, and dynamic spindle balancing before delivery. All machines comply with ISO 9001, ISO 14001, and CE standards, with full test

documentation provided. We deliver not just equipment, but confidence in every machine we build.



CNC Controller



Mechanical Accuracy Testing



Mechanical Accuracy Testing



Ballbar Detection and Correction



Laser Inspection Correction



Dynamic Balance Correction



Dynamic Balance Correction

BRAND SUPPLIERS

The most famous brands of spare parts that we use:



3-AXIS VERTICAL MACHINE CENTER SERIES

NV-855, NV-1165, NV-1370 & NV-1580

NANYA (NYCNC) vertical machine centers feature high-torque, high-speed motors and are equipped with premium components from leading Japanese, Taiwanese, European, and Chinese manufacturers. Our unique workbench design enhances cutting performance and rigidity, ensuring precision across a wide range of applications.

Built to strict quality standards, these machines deliver exceptional accuracy and reliability ideal for industries including automotive, aerospace, mold making, and general production. From small to large components, NANYA (NYCNC) machines deliver consistent performance and customer satisfaction.

STANDARD ACCESSORIES



Electric Transformer



Chip Conveyor Screw Type



Workbench Table



Pneumatic Component




Spindle oil Coolant System



Belt Type Spindle 10,000 RPM

OPTIONAL ACCESSORIES



Chip Conveyor Chain Type



Coolant Through Spindle System(CTS)



Spindle DDS 12,000 RPM



Part Measurement Probe Sensor



TM-20-1 TOOL SETTER PROBE



4th AXIS ROTARY TABLE

NANYA CNC MODEL NV-855



VERTICAL FRAME OF MACHINE STRUCTURAL CHARACTERISTICS



Structure Rigidity
The inverted Y-shaped design ensures full stroke support with no overhang, delivering exceptional rigidity and high-precision performance across the entire working range.

Enhanced Rigidity & Accuracy
Without a counterweight design, the machine achieves superior surface accuracy. The extended column span increases spindle loading capacity and structural rigidity, ensuring stable performance during heavy-duty operations.

MACHINE CUTTING PERFORMANCE

Surface Milling		Drilling Holes		Tapping	
6mm Cutting Depth		Ø80 Cutter Diameter		M30 Tapping	
steel 45#		steel 45#		steel 45#	
Cutter	Ø125mm*5T	Cutter	Ø80mm*2T	Cutter	M30*3P
Spindle Speed	550Rpm	Spindle Speed	800Rpm	Spindle Speed	120Rpm
Feed	F500	Feed	F100	Feed	F420
Width	80mm	Width	80mm	Width	50mm

STRUCTURAL DESIGN


The machine base and column are constructed from high-quality HT300 cast iron grade, with a surface hardness of at least HB250. These components undergo high temperature annealing and natural aging to ensure dimensional stability and long-term precision.

Reinforced with optimized structural design, the frame delivers excellent rigidity, minimizes vibration, and maintains a high fundamental frequency keeping it safely away from resonance zones for superior machining performance and surface finish.


STRUCTURAL CHARACTERISTICS & KEY COMPONENTS



Cylinder Clamp & un-clamp
"HINAKA" Made in Japan

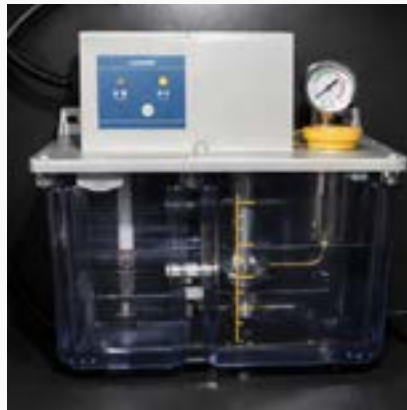


Lubrication system
"BAOTENG" Oil lubricant
Made in China

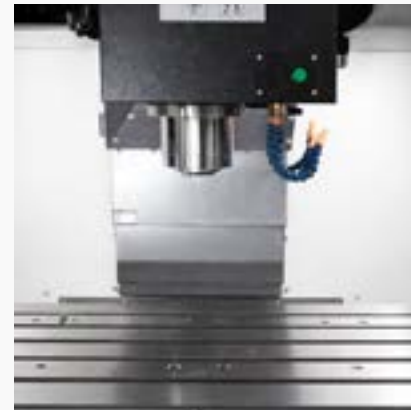

Workbench & distance
According to size
adjustment "Cost Iron"



Tool Magazine (ATC)
"DETA" (T-T) 1.8sec
Made in Taiwan

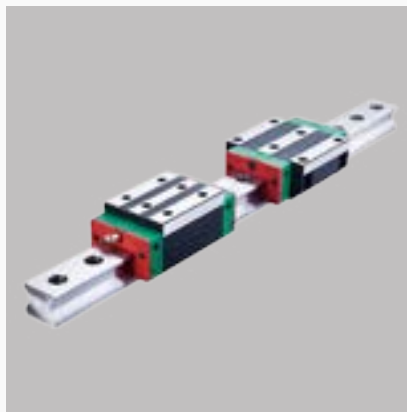

Linear guideway roller
"PMI & HIWIN"
Made in Taiwan



Spindle high Rigidity
"ROYAL" Belt/DDS
Made in Taiwan



Ball-Screw C3-grade
"PMI & HIWIN"
Made in Taiwan



Optical linear scale
"Heidenhain / Fagor"
Made in Germany



Spindle Bearings
"NSK / NTN equipped 5 nos.
Made in Japan

3-AXIS VERTICAL MACHINE CENTER ECONOMICAL SERIES

NANO-X8 / NANO-X10

Launched in March 2025, the NANYA CNC NANO-X SERIES redefines what's possible in cost-effective, high precision machining. Engineered to meet the demands of modern production environments, this series delivers exceptional value without compromising on quality, accuracy, or performance.

**"INTRODUCING
THE FUTURE OF SMART
MANUFACTURING"**

Economical by Design.
Powerful by Performance

WHY CHOOSE NANO-X?



COMPACT & SPACE-EFFICIENT

Designed with a reduced footprint, the NANO-X SERIES maximizes your shop floor efficiency ideal for facilities with limited space or those looking to optimize layout and workflow.



ENERGY-EFFICIENT ENGINEERING

Lower your operational costs with eco-friendly design that reduces power consumption without sacrificing cutting performance. Built for sustainability and long-term savings.

TWO MODELS. ONE VISION.



NANO-X8

The market-proven workhorse offering outstanding accuracy and reliability for everyday production needs.




NANO-X10

The next-generation model featuring enhanced rigidity, expanded work envelope, and superior cutting capabilities for demanding applications



NANO-X SERIES "PRECISIONS THAT PAYS BACK"

Invest in a machine that delivers immediate ROI through reduced energy costs, maximized uptime, and consistent quality. The NANO-X SERIES isn't just a machine it's a smart business decision.

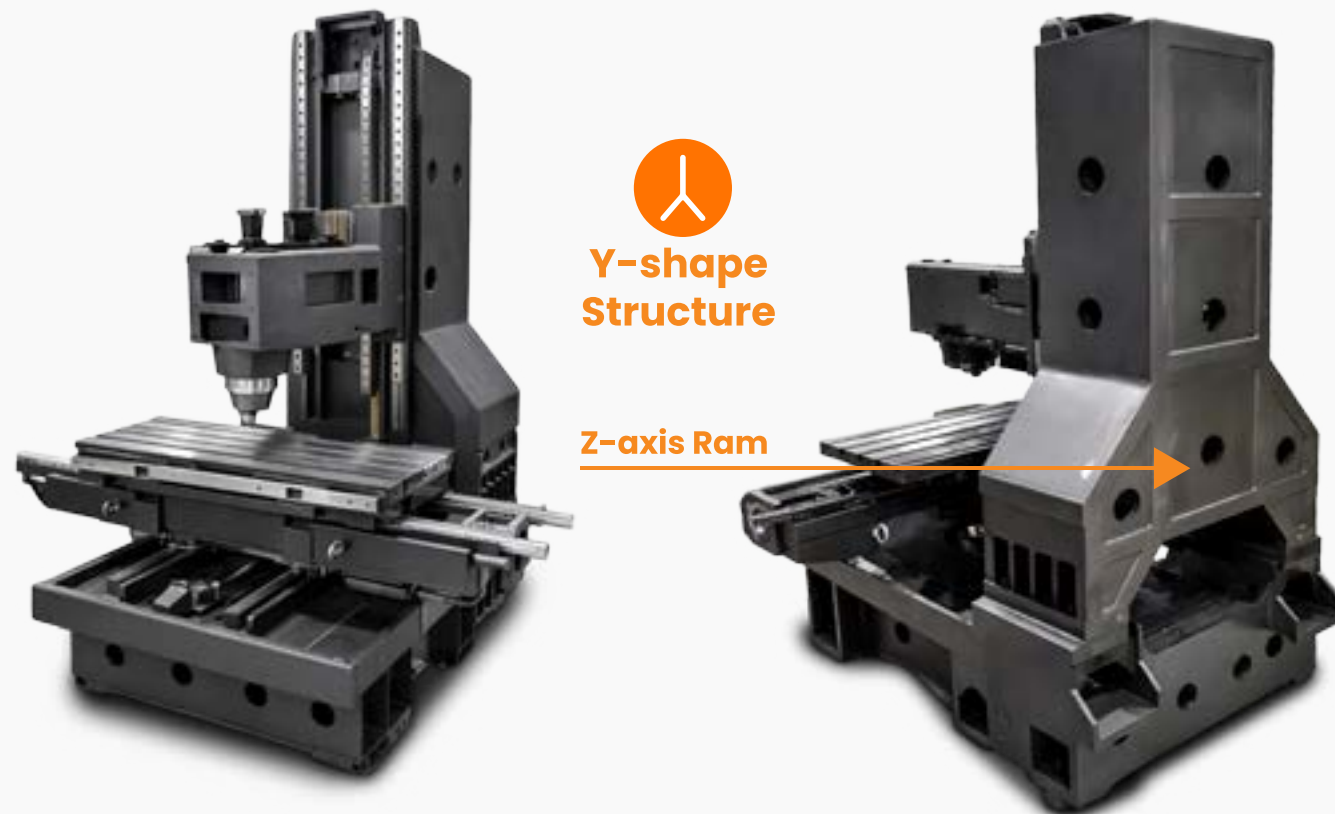

PROVEN RELIABILITY

Constructed with high-quality HT300 cast iron and premium components from leading global manufacturers, every NANO-X machine is built to last—ensuring consistent precision and minimal downtime.

INTELLIGENT PERFORMANCE

Equipped with high-torque, high-speed spindles and advanced control systems, the NANO-X SERIES adapts to a wide range of applications—from prototype development to high-volume production.

SPINDLE NOSE



VERSATILE APPLICATIONS

Perfect for automotive, aerospace, mold making, electronics, and general manufacturing industries. Handle everything from small precision parts to medium-sized components with ease.

EXPERIENCE THE PERFECT BALANCE OF ECONOMY, ECOLOGY, AND EXCELLENCE.



TAPPING & DRILLING CENTER NV-700T

- 700/400/350 mm X,Y, Z Axis Travel
- BT 30- 20000 Rpm Direct Drive Spindle
- 800x420 mm Table Size
- 350 Kg Table Loading Capacity



- Greatly Reduces Machining Time.
- 48 Meters (60 Meters) Rapid Traverse On Three Axis
- Base and Column Are Designed With Great Span Between Slideways For Maximum Stability.
- The Direct-drive High Speed Spindle Provides Sensitive Response With 6,000 Rpm For Tapping Operations.
- Increased Height Of Column Has Sufficient Space To Mount The 4th And 5th Axes.
- High Speed Servo Drive Tool Changer Is Fast And Stable That Reduces Non-cutting Time.
- Rear Chip Removing Design Features Excellent Chip Removing Angle And Large Flow Chip Flushing System.

APPLICATION:

3C Parts, Hardware, Molds, Automotive, Aerospace and Graphite Parts.



STANDARD ACCESSORIES

- BT30 20000rpm Spindle
- 21 Tools A.T.C (Arm Type)
- Fully Enclosed Guarding
- Working Lamp
- Central Lubrication System
- Tools and Toolbox
- Water Gun
- Level Adjustment Block And Leveling Screw

OPTIONAL ACCESSORIES

- Spindle Oil Cooler
- Oil/Fluid Separation Device
- Automatic Tool Measuring Device
- 4th Axis Rotary Table And Tailstock
- 12,000/15,000 Rpm Direct-drive Spindle
- Coolant Through Spindle (15 Bar/20 Bar)
- Programmable Coolant Nozzle Adjustment

MECHANICAL SPECIFICATION TABLE



ITEM	UNIT	NV-700T	Nano X8	NV-855	Nano X10	NV-1165	NV-1370
		TAPPING & DRILLING	MILLING CENTER				
TRAVELS							
X-Axis travel	mm	700	800	830	1000	1100	1300
Y-Axis travel	mm	400	500	550	600	650	750
Z-Axis travel	mm	350	550	550	600	600	700
Spindle nose to table	mm	145-495	90-640	135-685	135-735	120-720	120-820
Spindle center to column	mm	445	560	595	635	680	780
X-Axis Linear guidway		30 Roller type	35 Roller type	35 Roller type	35 Roller type	45 Roller type	45 Roller type
Y-Axis linear guidway(Blocks)		30 Roller type	35 Roller type	45 Roller type	45 Roller type	45 Roller type	55 Roller type
Z-Axis linear guidway(Blocks)		35 Roller type	35 Roller type	45 Roller type	45 Roller type	45 Roller type	55 Roller type
TABLE							
Table Size(workbench)	mm	800 x 420	1000 x 500	1000 x 550	1200 x 600	1200 x 600	1400 x 750
T-Slot (Number*Width*Pitch)	mm	3 x 14 x 125	3 x 18 x 102	5 x 18 x 90	5 x 18 x 100	5 x 18 x 100	5 x 22 x 125
Maximum Table Load Capacity	KG	400	700	800	800	1000	1600
SPINDLE							
Spindle Speed (Rotation)	Rpm	20,000 / Opt. 30,000	10,000 / Opt. 12,000	10,000 / Opt. 12,000	10,000 / Opt. 12,000	10,000 / Opt. 12,000	10,000 / Opt. 12,000
Spindle Motor torque	Nm	5.5kW / 47.8Nm	7.5 / 11 kw 96 N/m	7.5 / 11 kw 96 N/m	7.5 / 11 kw 96 N/m	11/18.5Kw 115 Nm	11/18.5Kw 115 Nm
Spindle Taper	Type	BT-30 / Opt. BBT-30	BT-40 / Opt. BBT-40	BT-40 / Opt. BBT-40	BT-40 / Opt. BBT-40	BT-40 / Opt. BBT-40	BT-40 / BT-50
Spindle Driven	Type	Belt / Direct	Belt / Direct	Belt / Direct	Belt / Direct	Belt / Direct	Belt / Direct
Spindle Diameter	mm	100	140	150	150	150	160
FEED RATE							
X-Y Axis Rapid feed Rate	m/min	48 / 48	48 / 48	40 / 40	40 / 40	40 / 40	30 / 30
Z Axis Rapid feed Rate	m/min	48	48	40	40	40	30
X.Y.Z- Maximum Cutting Feed Rate	m/min	1-12,000	1-12,000	1-12,000	1-12,000	1-12,000	1-12,000
TRANSMISSION							
Umbrella Type- Arm-less	nos	21 Tools (1.6Sec)					
Arm-Type ATC (Tool to Tool)	nos		24 Tools (1.8 Sec)	24 Tools (1.8 Sec)	24 Tools (1.8 Sec)	24 Tools (1.8 Sec)	24 Tools (2.4 Sec)
Maximum Tool Dia * Length (Neighbor)	mm	60 x 250	80 x 300	80 x 300	80 x 300	100 x 300	100 x 300
Maximum Tools Weight	KG	3	7	7	7	7	15
MOTORS POWER / TROGUE							
Maximum Tools Weight	kW	1.5 kW	2.0 kW	2.0 kW	2.0 kW	3.0 kW	3.0 kW
Z-Axis Servo Motor	kW	3.0B kW	3.0B kW	3.0B kW	3.0B kW	3.0B kW	3.0B kW
MACHINE ACCURACY							
Positioning Accuracy		± 0.008	± 0.008	± 0.008	± 0.008	± 0.008	± 0.008
Repeat Positioning Accuracy		± 0.004	± 0.004	± 0.004	± 0.004	± 0.004	± 0.004
MEASUREMENT							
Machine Measurement & Floor Clearance	mm	1950 x 2400 x 2250	2300 x 2000 x 2400	2500 x 2200 x 2400	2900 x 2400 x 2600	2700 x 2300 x 2550	3300 x 2700 x 2800
Machine Net. Weight	KGS/Tons	3300 / 3.3 tons	4600 / 4.6tons	5000 / 5tons	5500 / 5.5tons	6500 /6.5tons	8500 /8.5tons

OUR PROMISE

HIGH
PRECISION

HIGH
RIGIDITY

HIGH
STABILITY

HIGH
EFFICIENT



Taiwan (Head-Office)

+886-4-2699-0550 H/P +886-928 021 628

+886-4-2699-1539

www.nanya-cnc.com / nye-cnc.com

att0905@gmail.com /
adam@nanya-ent.com

No.118, 5F-1, Dadun 20th Street,
Xitun District, Taichung City,
Zipcode 407, TAIWAN ROC.

China (Production)

+86 510 8872 4880 H/P +86-1377 9913 538

+86 510 8872 3568

www.nanya-cnc.com / www.nye-cnc.com

adam@nanya-ent.com

No 9, 1st Floor, Renmin N Rd,
Yixing, Wuxi, Jiangsu,
China 214207