




CSR

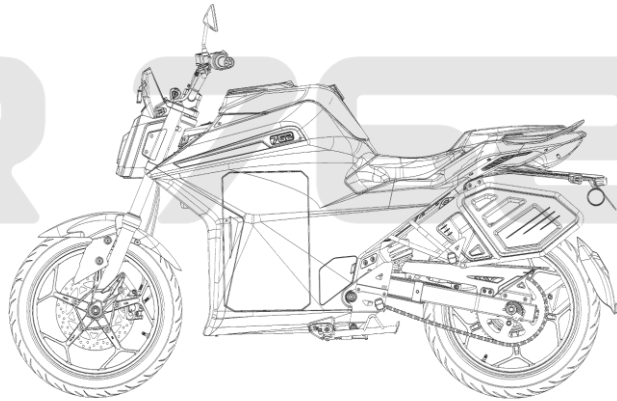

Key SPECIFICATION

PERFORMANCE

Power	3Kw
Peak Power	6.5Kw @3600 RPM
Torque	55Nm
Top Speed	110 km/h
Acceleration (0-60 km/h)	6 Second
Driving Modes	6 (4-Riding modes, 2-Assist mode)

RANGE

IDC Range (EST)	125 Km
Charging 20-100% (3.6 kW)	5.5 Hours

POWERTRAIN

Powertrain	72 v
Battery Installed Capacity	3.6kW
Charging Cycle	>1500
No. of Battery	2
Battery Weight	20 kg (per module)
Active Thermal Management	✓
Battery Balancing	✓



Battery Chemistry	Li-ion, Ni-Manganese-cobalt (NMC)
Battery Nominal Voltage	72 V
Protection Class	IP68 (AIS-156)
Battery Enclosure	Aluminium Alloy
Motor Type	PMSM, 72 V DC (Central drive)
Throttle Control	Ride-by-wire
Ingress Protection (Motor)	IP68
Ingress Protection (Controller)	IP68

DIMENSIONS

Height	1102mm
Wheelbase	1460mm
Ground Clearance	205mm
Seat Height	820mm
Kerb Weight	165kg
Weight Capacity	175kg
Water Wading limit	250mm
Rake Angle	24°

SUSPENSION & FRAME

Front Suspension	ø37mm Telescopic Suspension
Rear Suspension	Adjustable mono-shock
Frame type	Lattice space frame
Frame Material	Carbon Steel

WHEEL & TYRES

Wheel type	Alloy y-type
Wheel size (front)	17" X 3"
Wheel size (rear)	17" X 4"
Tyre size (front)	100/80 R17 Tubless Tyre
Tyre size (rear)	140/70 R17 Tubless Tyre

BRAKES

Braking System	Combi-brake
Brake type (front)	Disc brake
Brake type(rear)	Disc brake
Disc size (front)	270mm
Disc size (rear)	240mm

TRANSMISSION

Type	Chain drive
Transmission ratio	1:4.3

ELECTRONIC

Headlights	LED
Taillights	LED
Indicators	LED
HSRP	Bulb

WARRANTY

Vehicle Warranty	2 years/ 20,000kms
Battery Warranty	3 years/ 35,000kms

DASHBOARD

Screen Size	7 inch
Water & Dust Resistance	IP65
Resolution	600 X 1024
Brightness	1000 nits
Operating System	Android
Processor	Qualcomm
Storage	16 GB
RAM	2 GB-DDR
Range and Charge Indicator	✓
Bluetooth Connectivity	✓
Call & Music control	✓



OTA updates

✓

Dark and Light mode

✓

FEATURES

Smart key fob

WIP

Battery Removable

✓

Boot Space

37 L

Cell phone Holder-Charging

✓

Phone Charging port

X2 (inside boot)

Regenerative Brake

✓

Electrical Malfunction Protection

Naturally Aspirated Air Cooling for the
Motor, Controller & Batteries.


Cooling.

Side Stand Motor Cut-off

✓

Pillion grab handle

✓

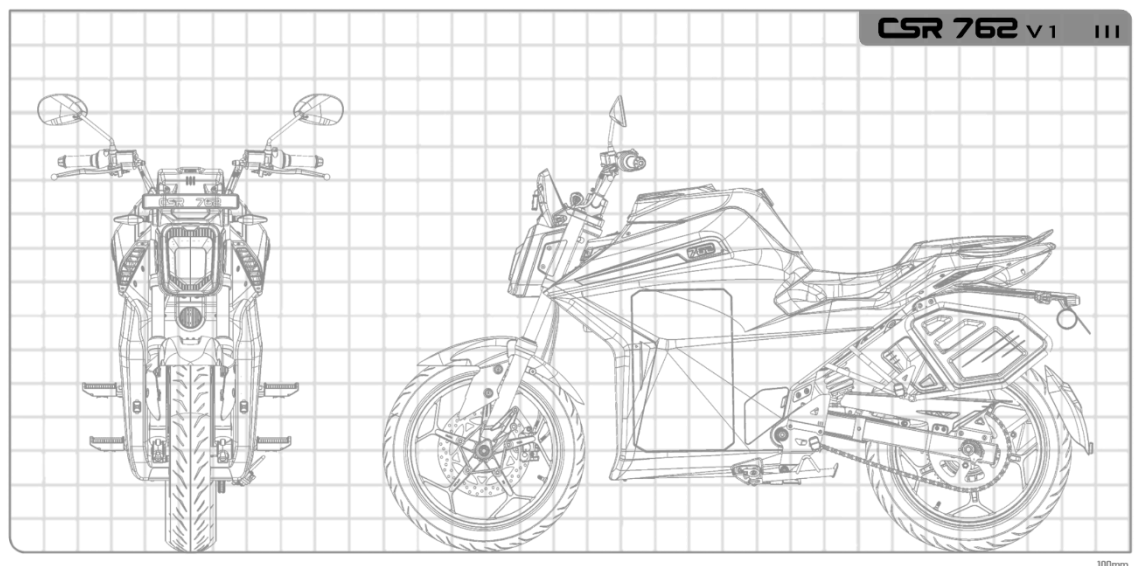

* Specifications are based on controlled testing conditions and actual performance may vary depending on various factors including riding conditions and maintenance. Switch motorcorp reserves the right to make any changes as needed