

Ethanol Blending in Gasoline – Ireland


July 2026



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90



www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe

There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.



Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.


Ethanol Gasoline Blending in Ireland




In 2025, gasoline consumption in Ireland was 1,122 million liters (296 million gallons) and growth rate was -3.3%. Gasoline production and net imports were 721 and 246 million liters (191 and 65 million gallons) correspondingly. Ireland complies with the European gasoline standards and offers two main grades: RON 95 and RON 98 with an average octane of 95.3 RON.

In 2025, ethanol consumption in Ireland was 107 million liters (28 million gallons) representing 10% of gasoline demand. Ethanol production and Net Imports were 10 and 95 million liters (3 and 25 million gallons) correspondingly. Ethanol source is Cereals 100%.

Gasoline Demand in Ireland

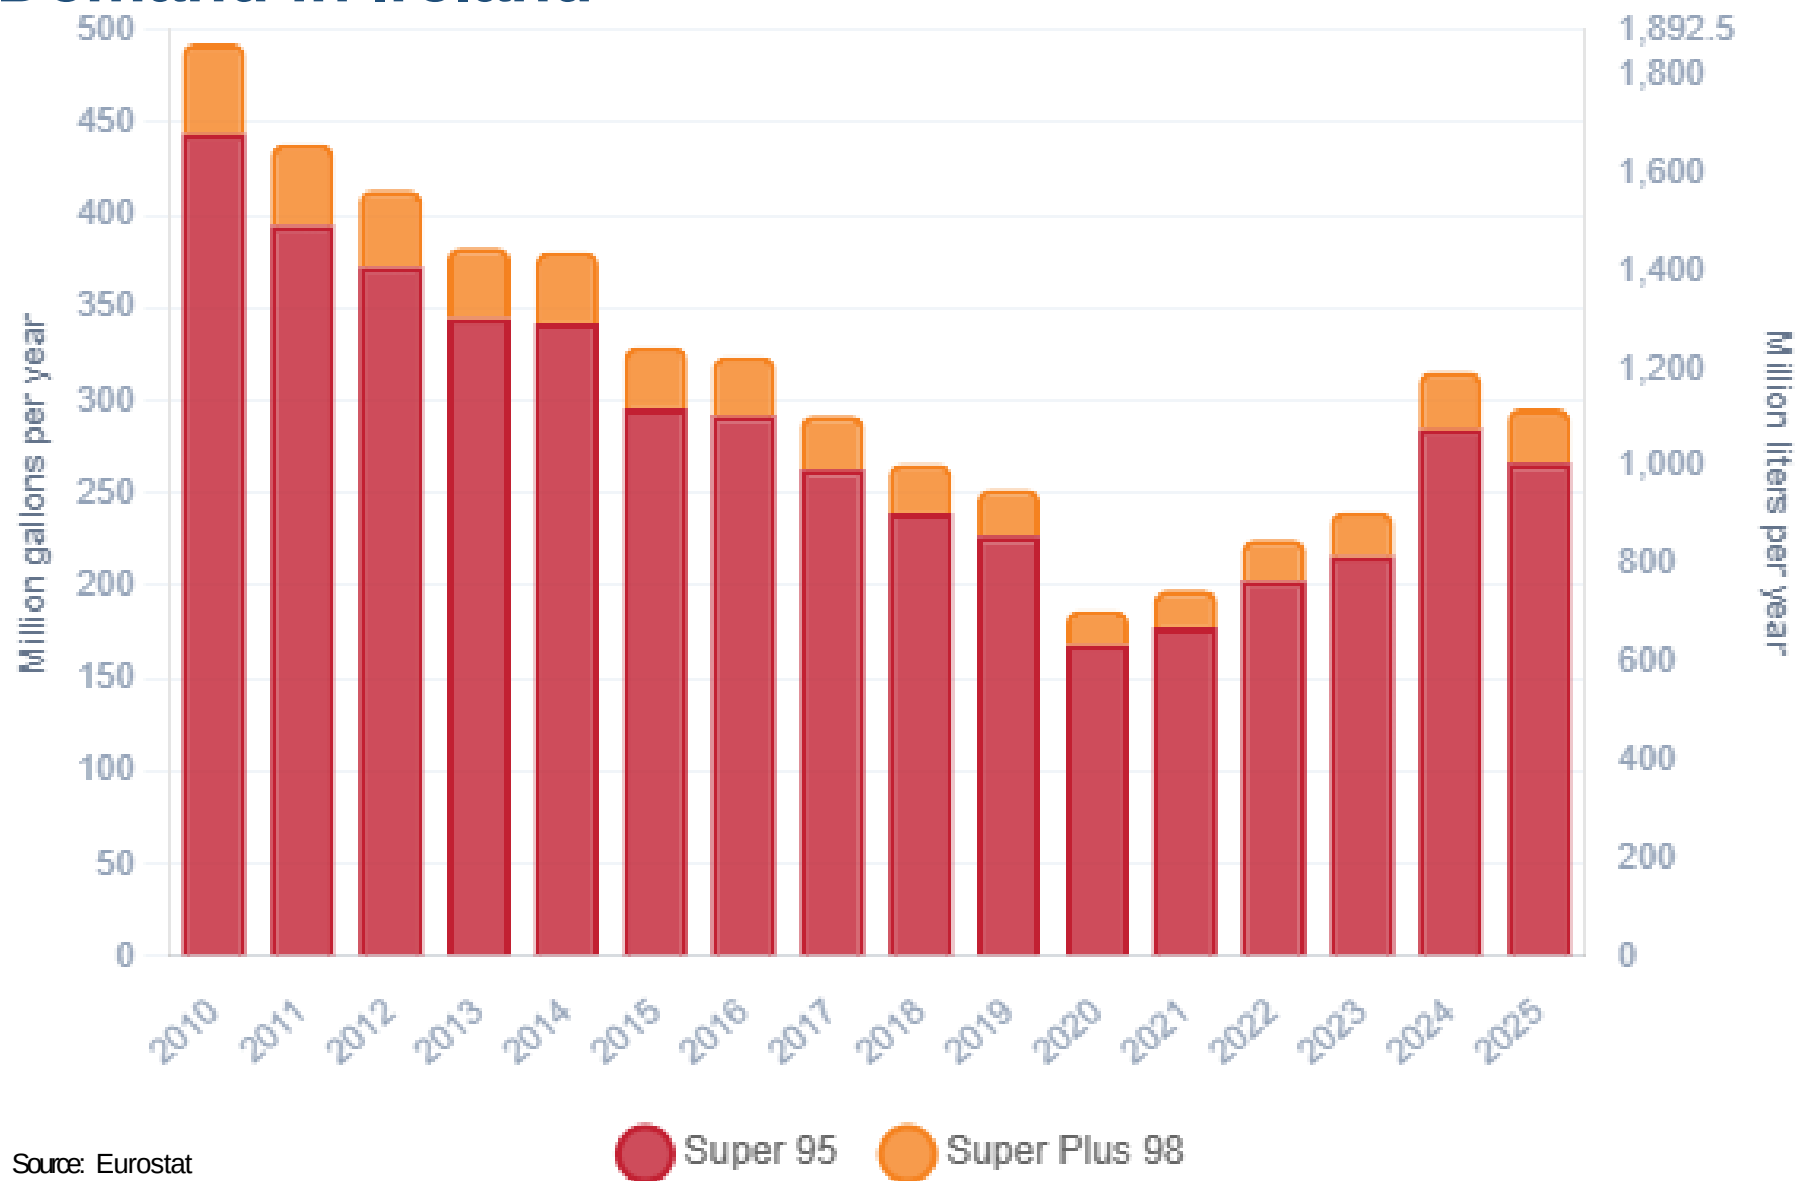


Gasoline Production in Ireland

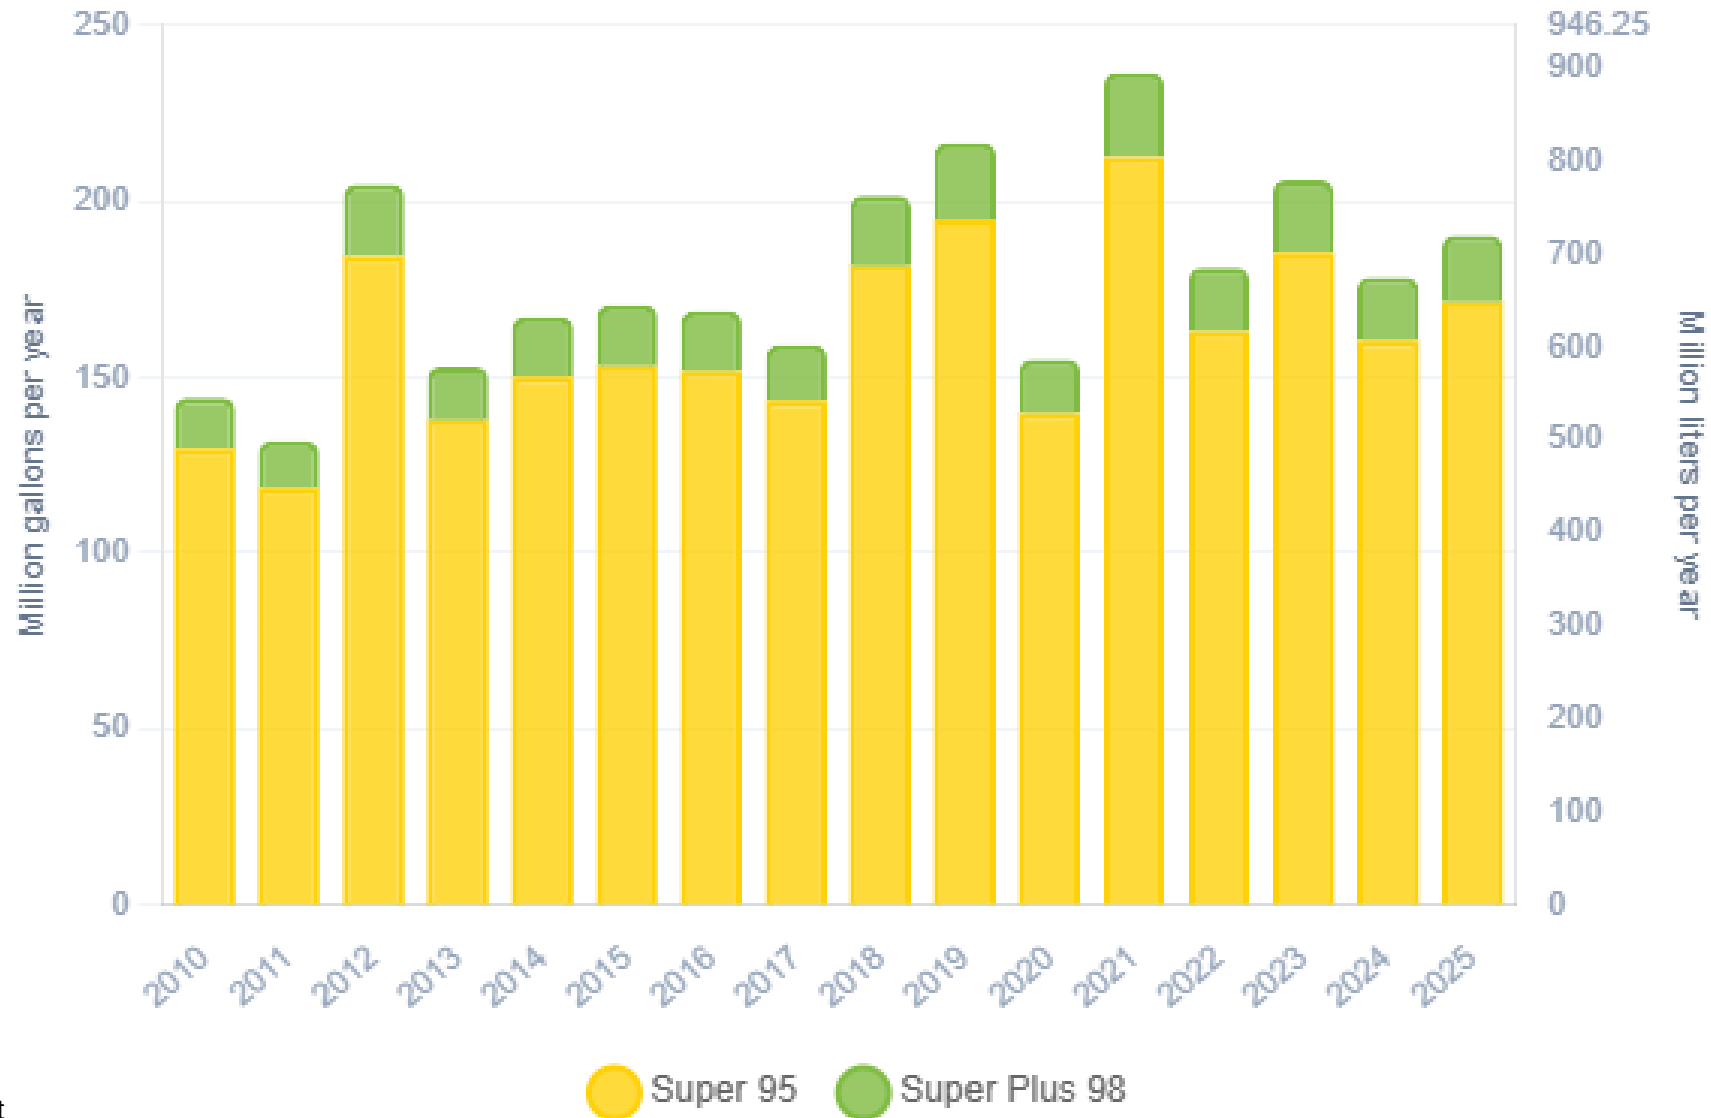


Source: Eurostat

Gasoline Imports in Ireland

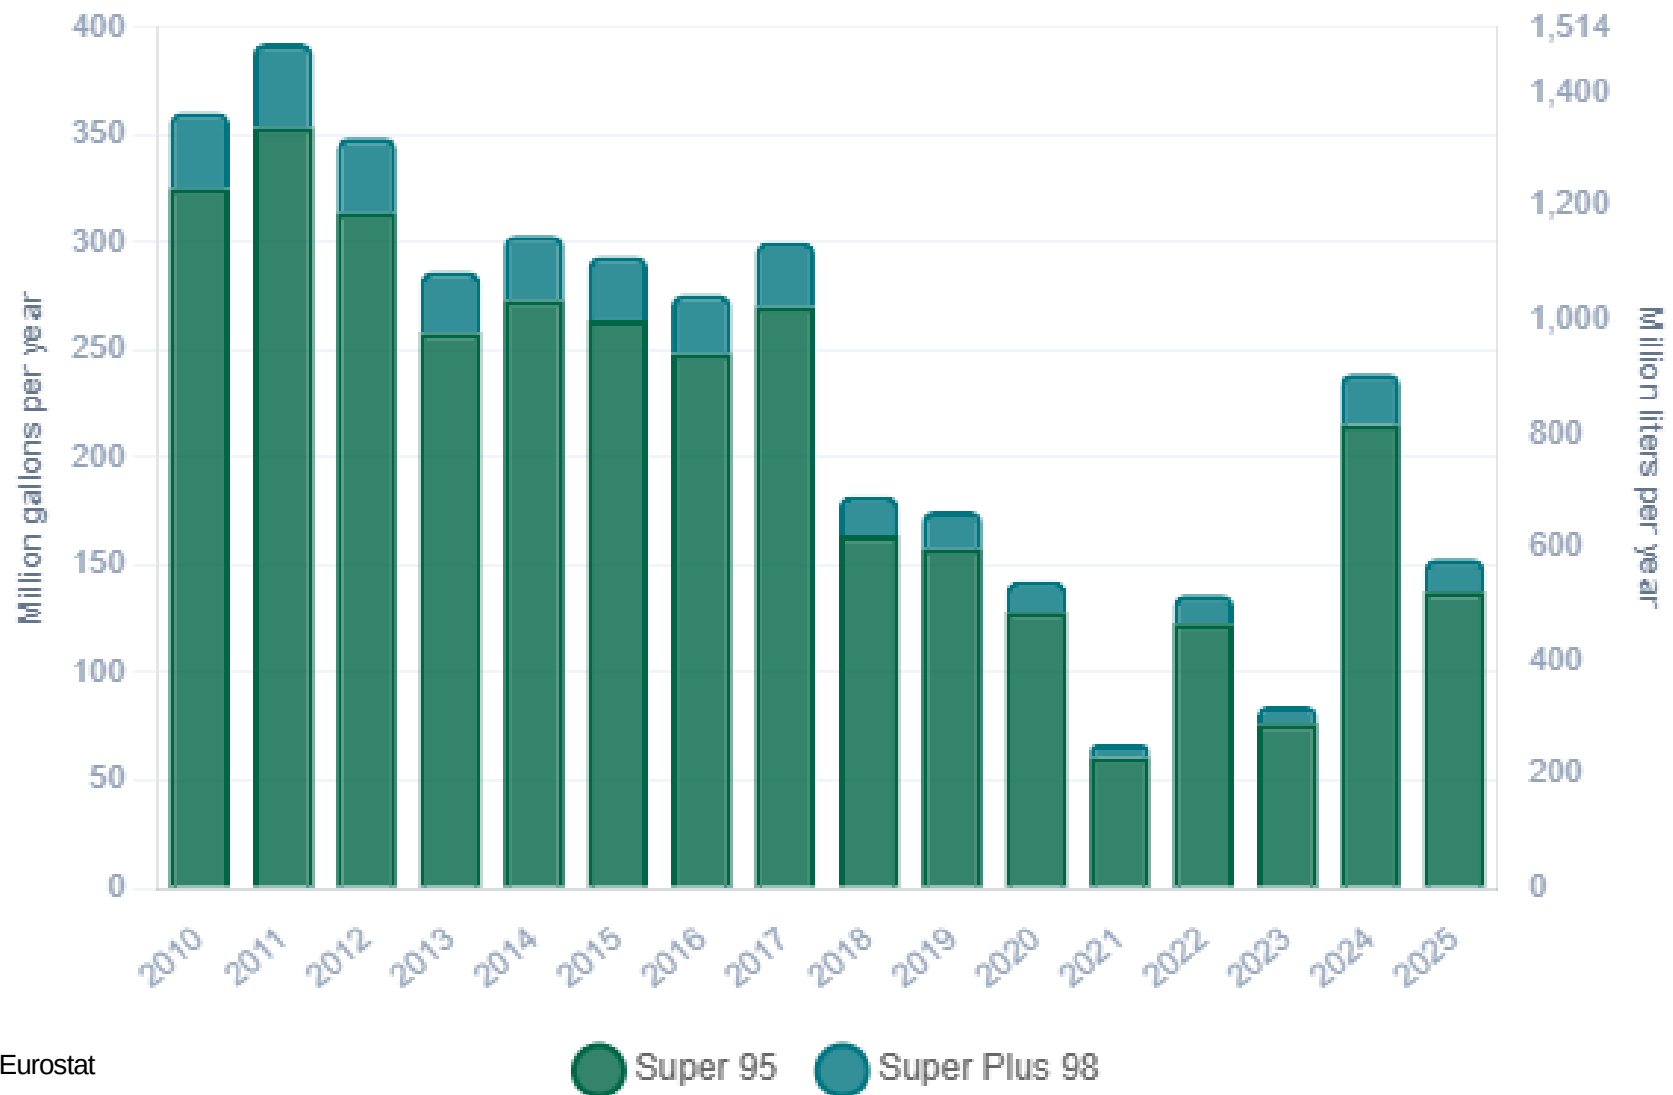


Source: Eurostat

Gasoline Exports in Ireland

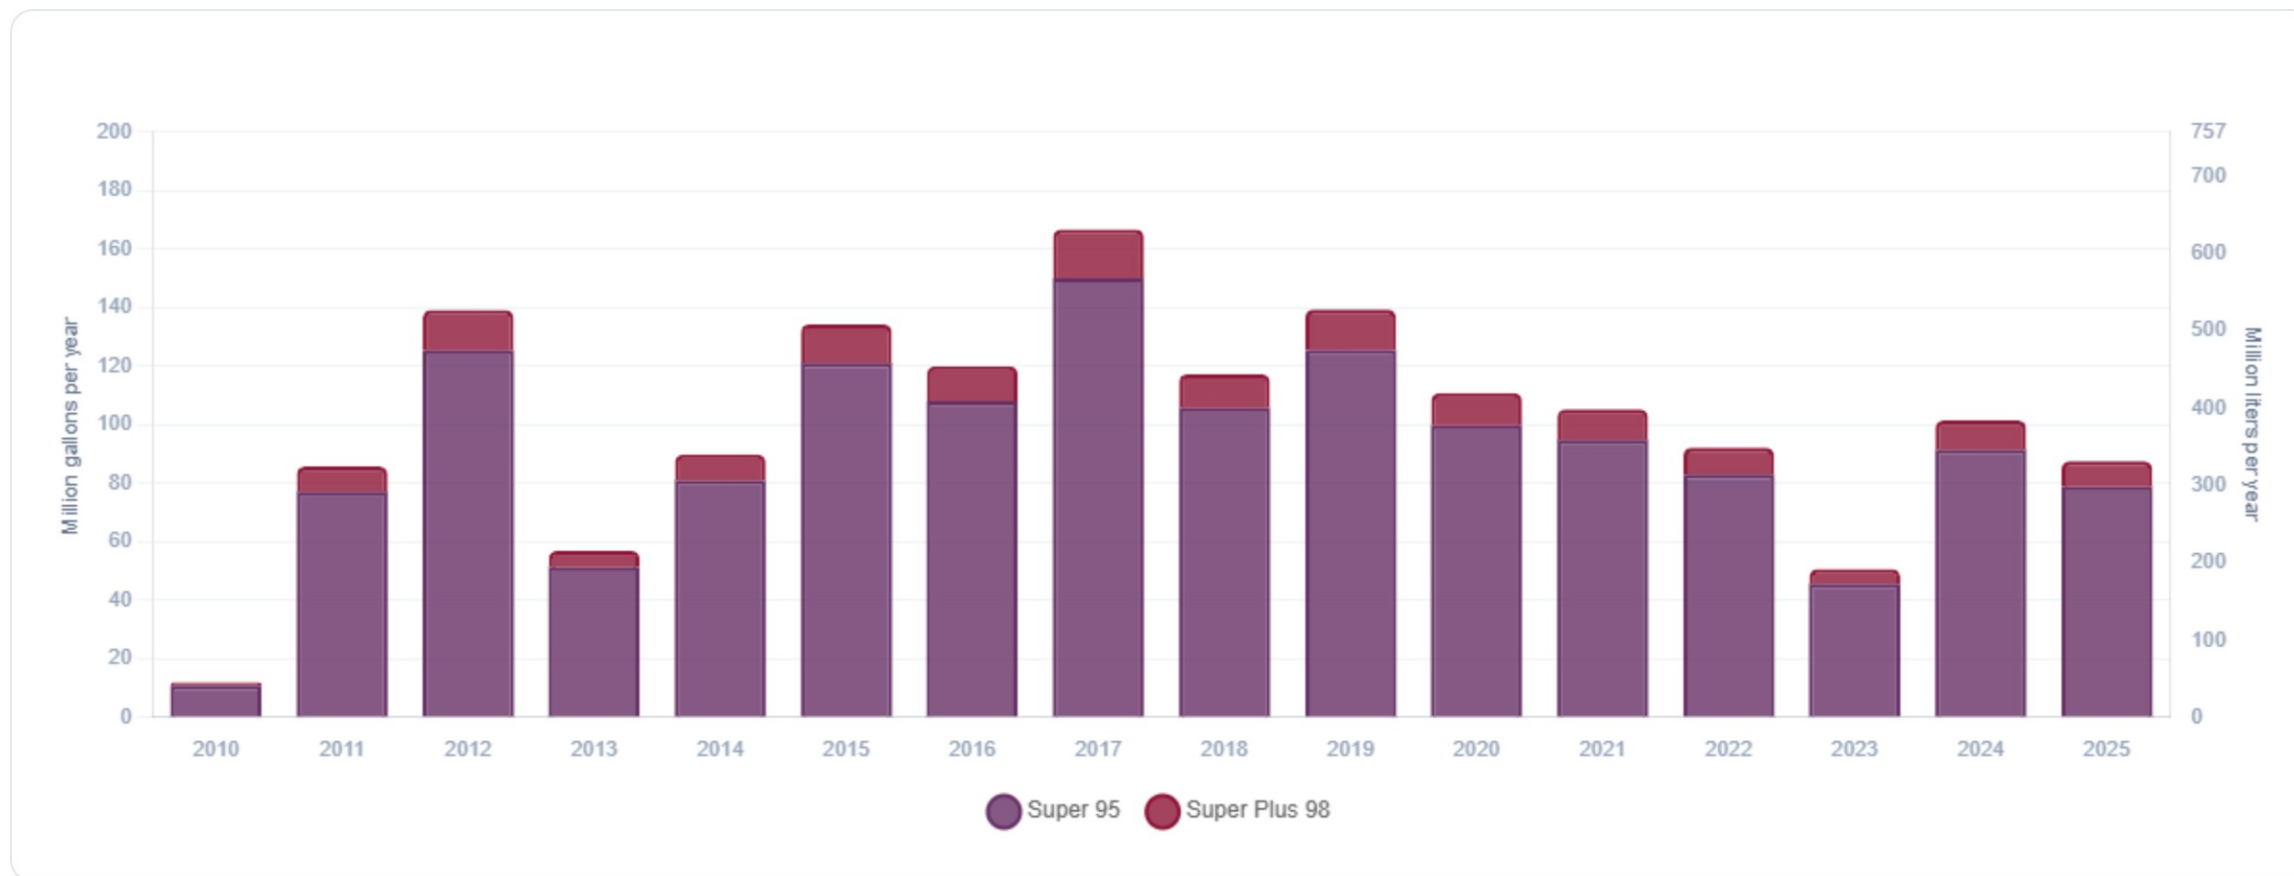

Source: Eurostat

Ethanol Balance in Ireland

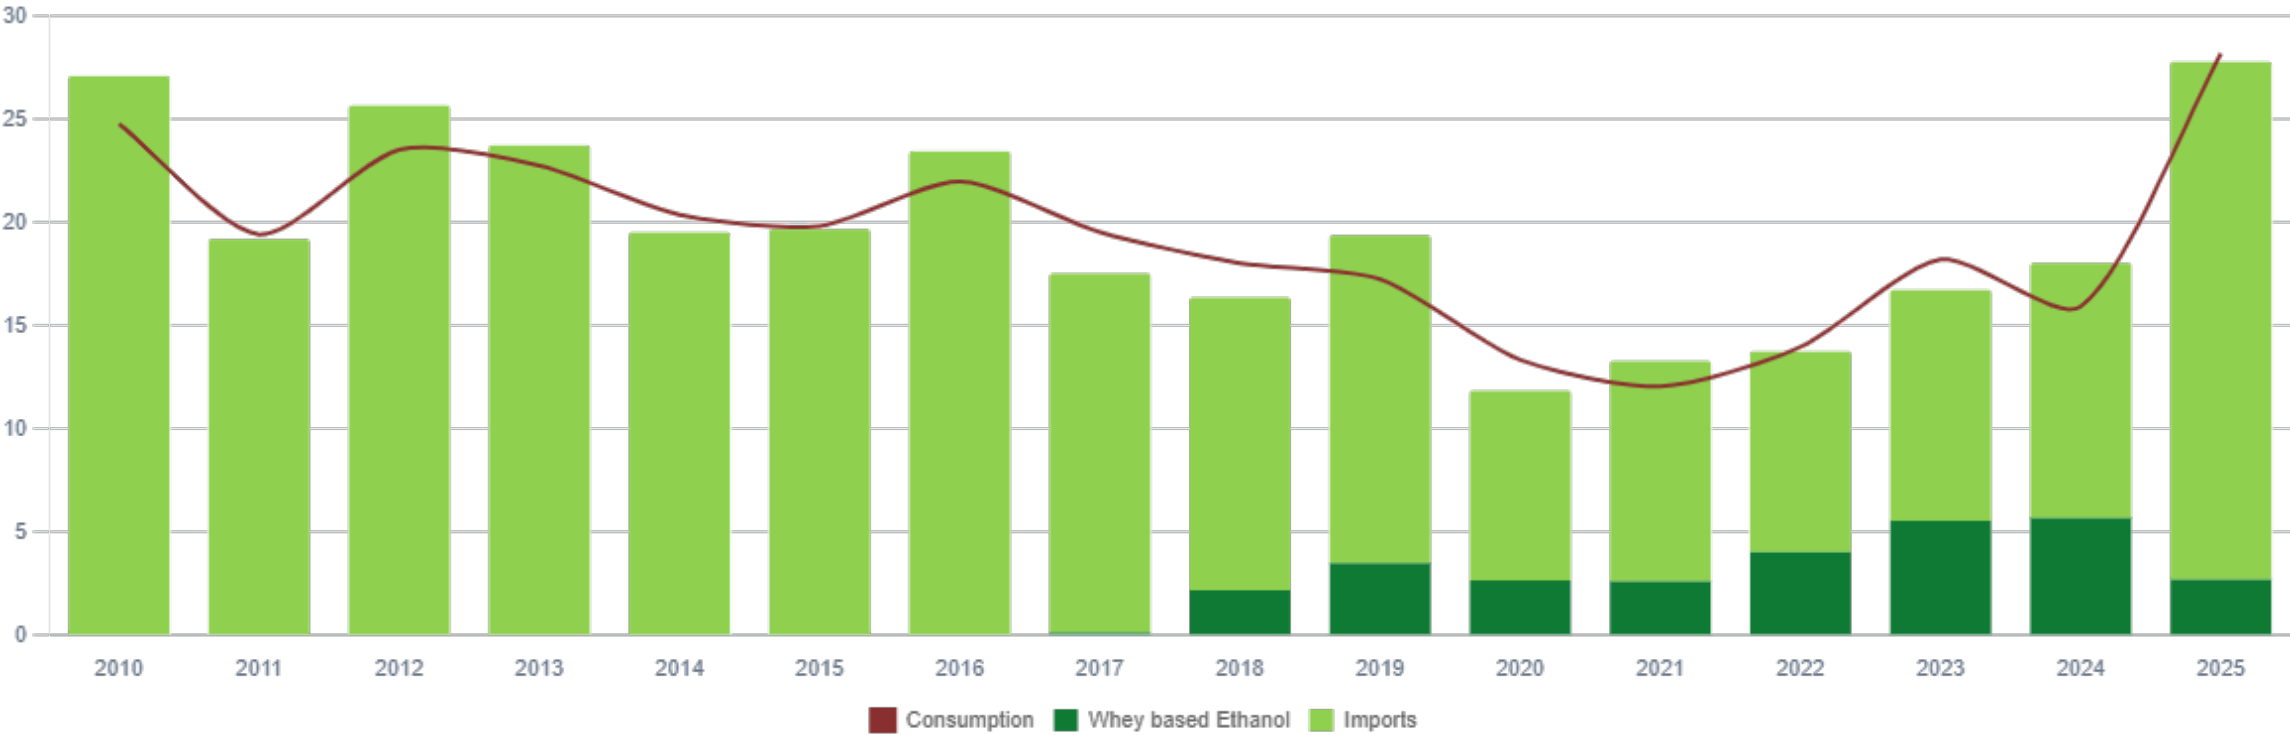

Source: Eurostat


Gasoline Quality in Ireland

Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Countries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	< 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	21.0							
Advanced Biofuels (%cal)	1.0							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	-							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commission


Gasoline Component Blending in Europe



Gasoline is a blend of a base gasoline and other components. Each component provides different properties to the final blend, for example, isomerates, alkylates and butanes increase the octane. The components commonly used in Europe are:

- Catalytic Gasoline
- Light Primary Naphta
- Heavy Primary Naphta
- Reformate
- Isopentane
- Alkylate
- Isomerate
- Hydrocracked Gasoline
- Coker Naphta
- n-Butane
- MTBE
- ETBE
- TAME
- Aromatics

Source:
Faro90

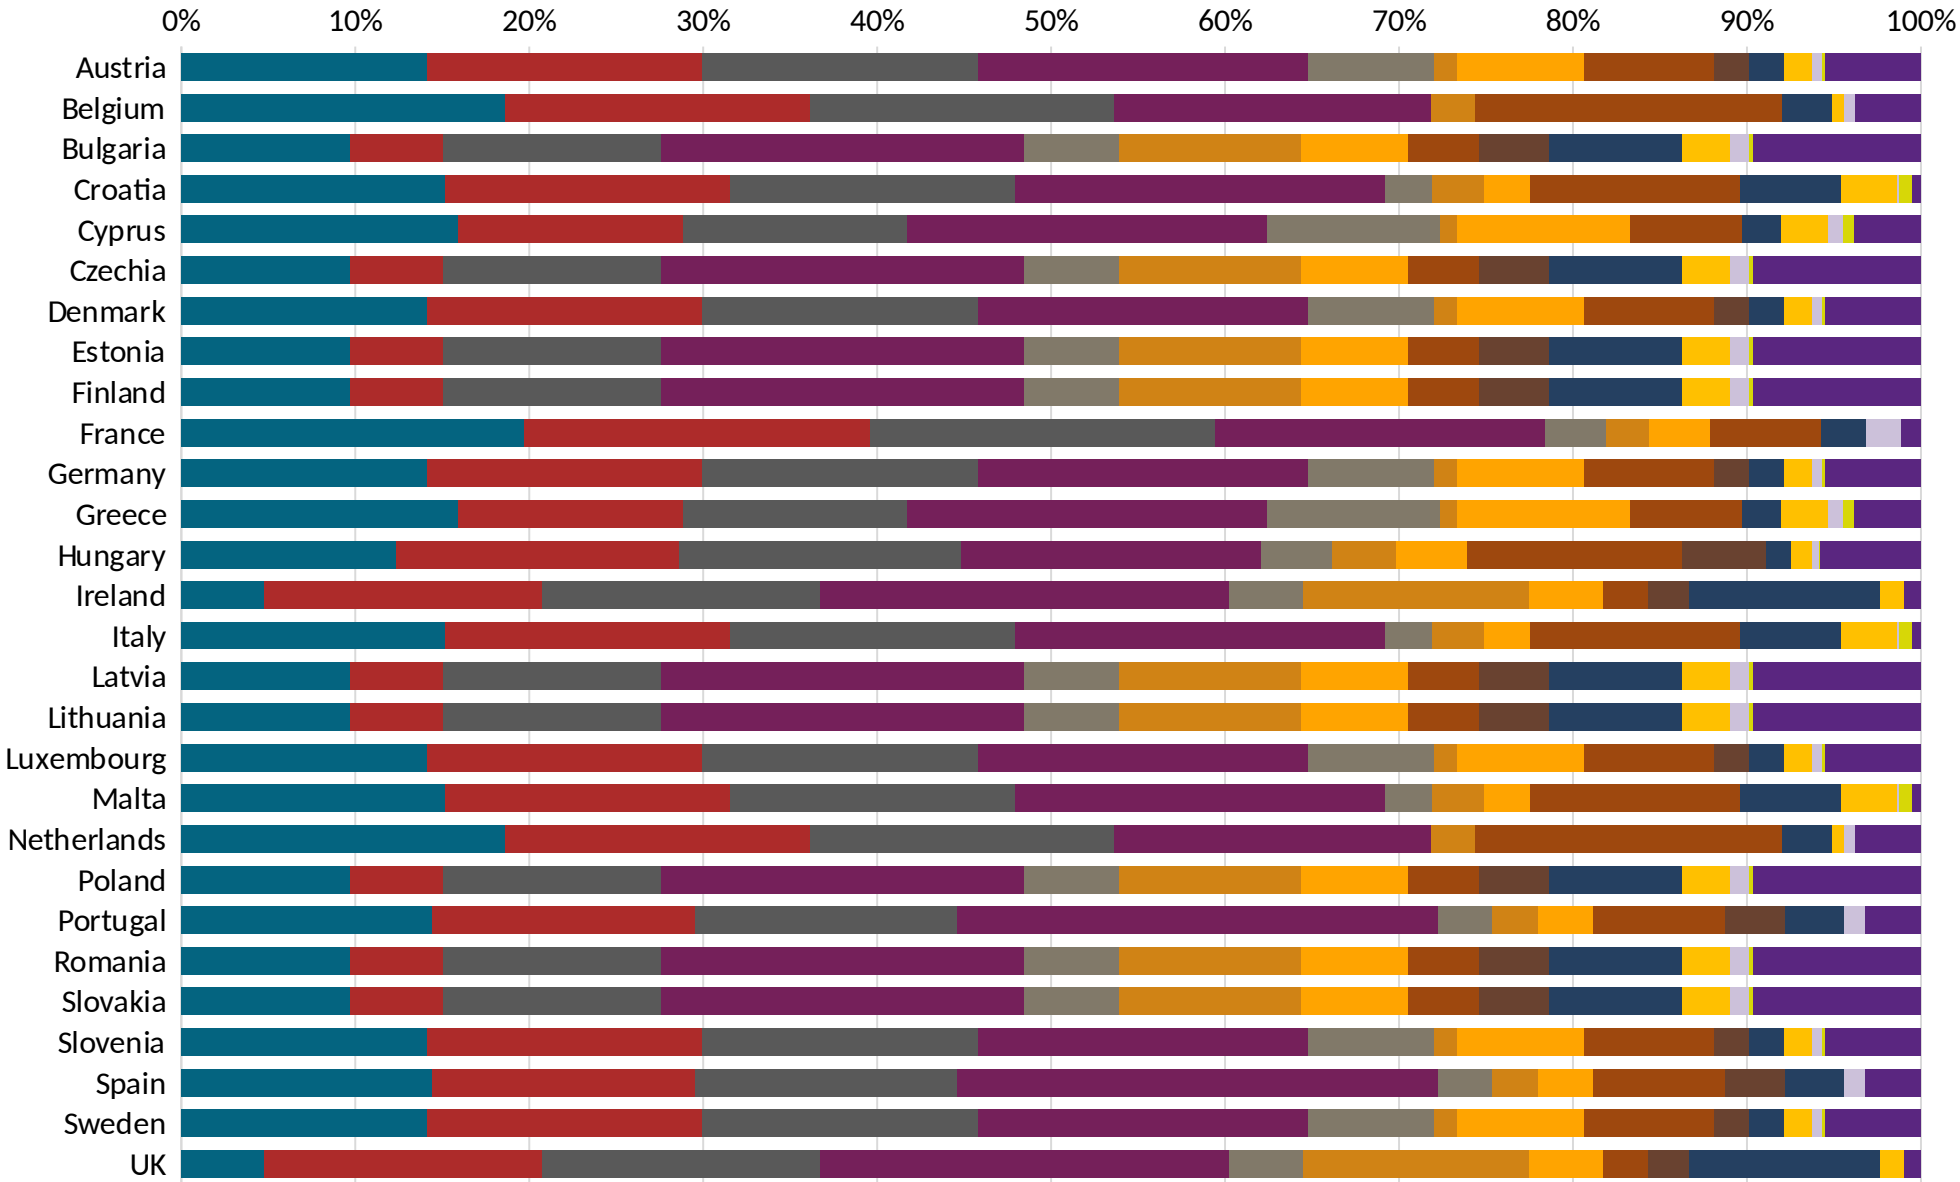


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2025 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

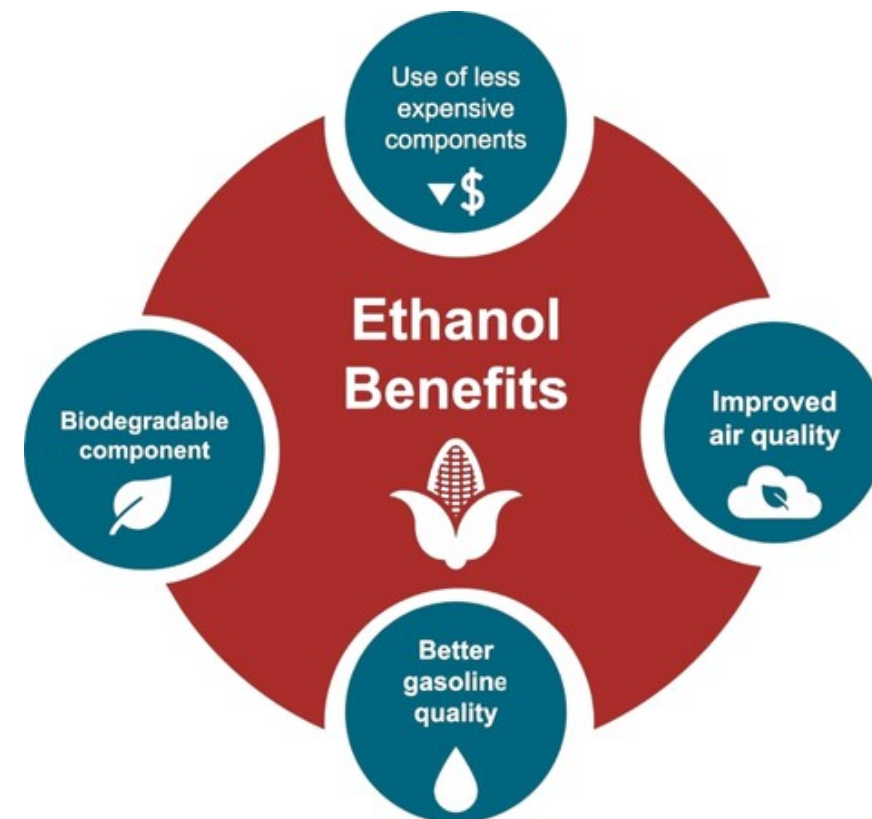

Ireland Available Blending Components

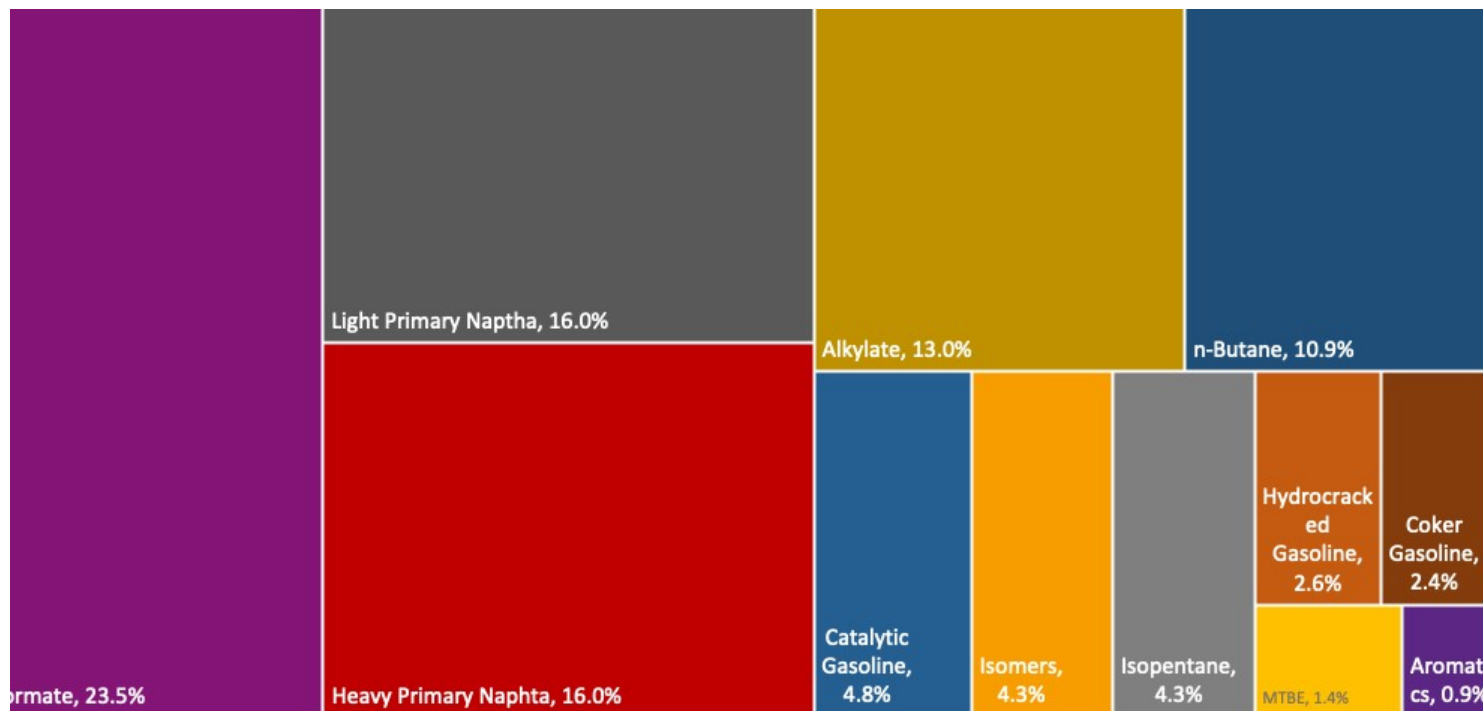



Ireland – Gasoline 95 – Constant Octane

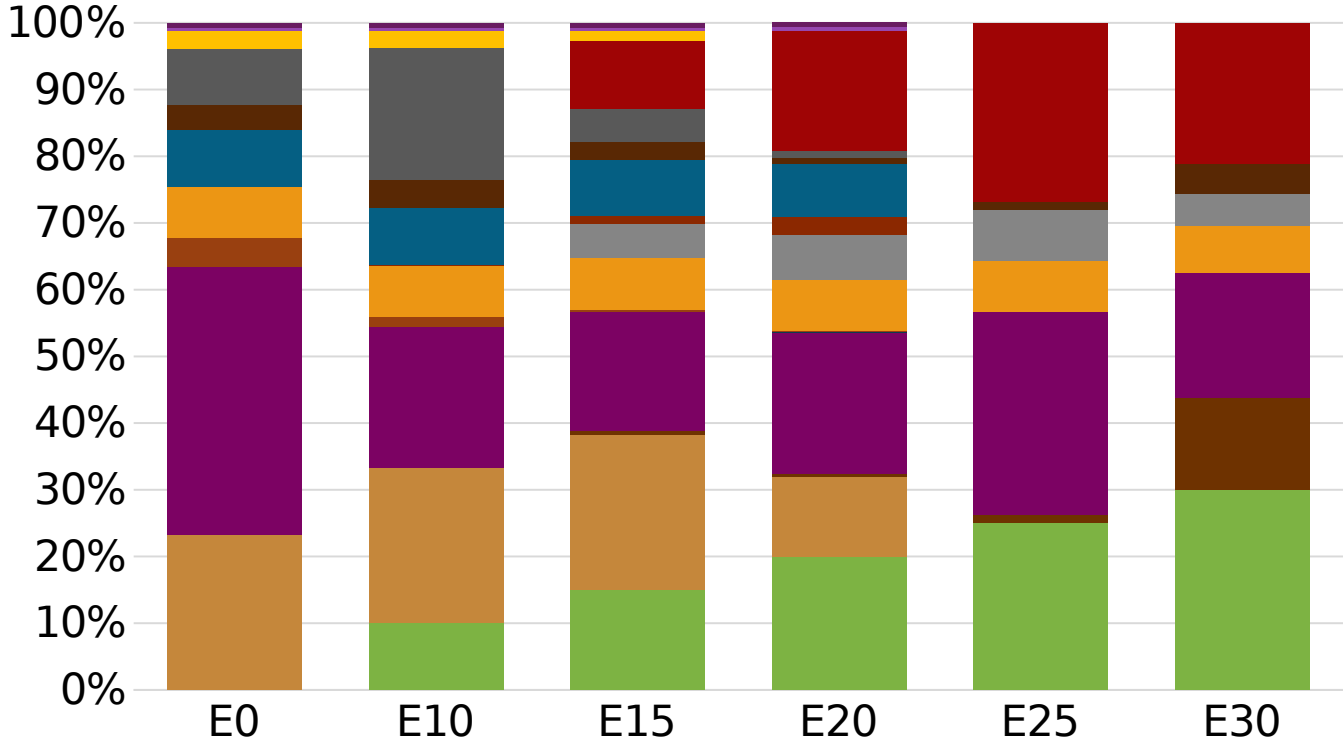

Average CIF 2025
Prices


Octane (RON)	95.0	95.0	95.0	95.0	95.4	95.8
Price (US\$/gal)	\$ 2.114	\$ 1.984	\$ 1.902	\$ 1.793	\$ 1.683	\$ 1.618

Ireland - Gasoline 98 - Constant Octane

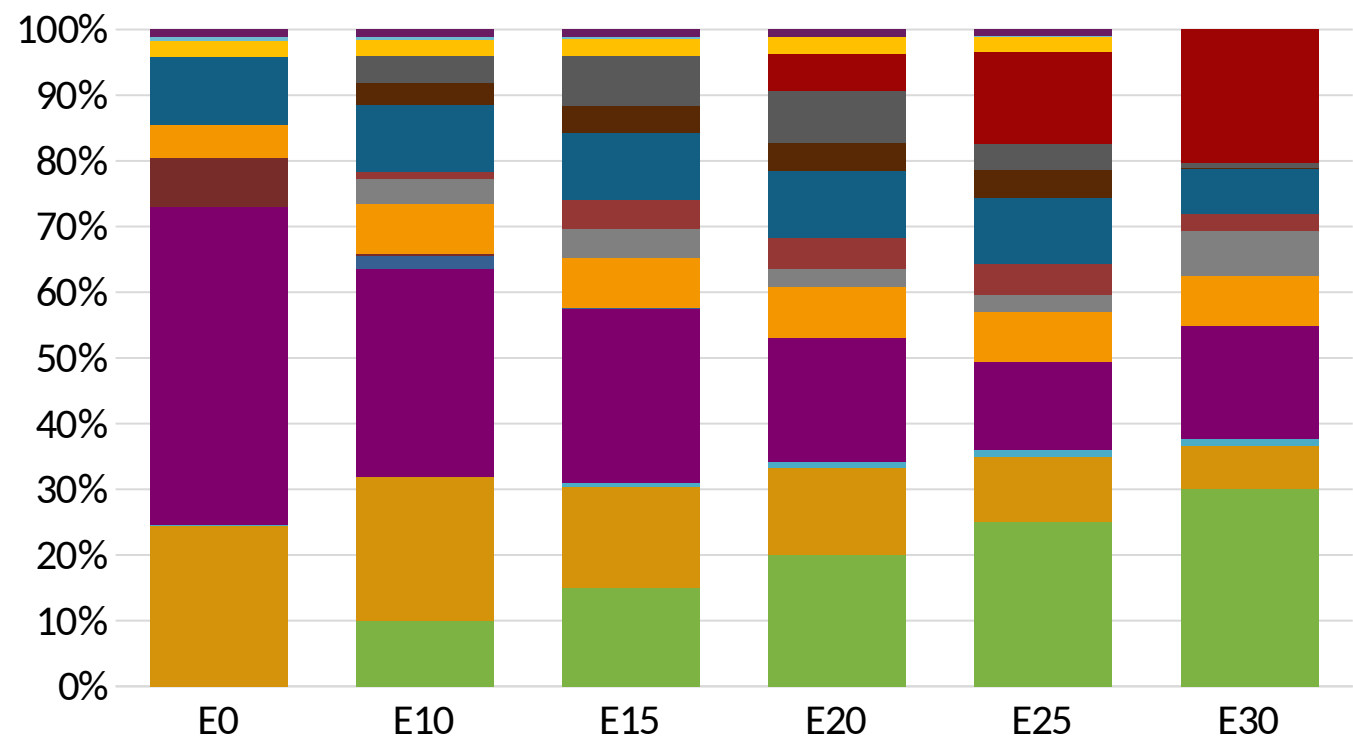

Average CIF 2025
Prices


Ireland – Gasoline 95 – Increased Octane

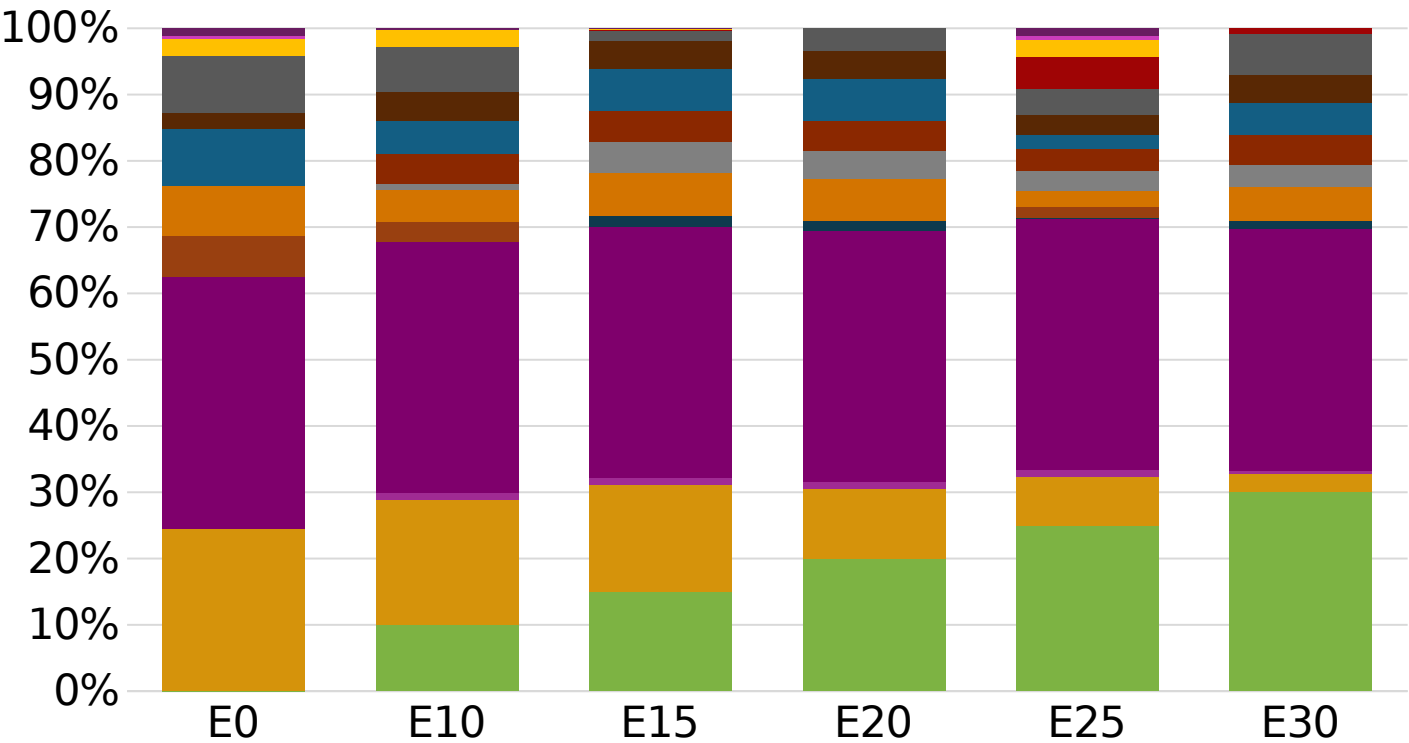

Average CIF 2025
Prices

Octane (RON)	95.0	97.9	99.3	100.9	102.6	103.9
Price (US\$/gal)	\$ 2.098	\$ 2.098	\$ 2.098	\$ 2.098	\$ 2.098	\$ 2.098

Ireland – Gasoline 98 – Increased Octane

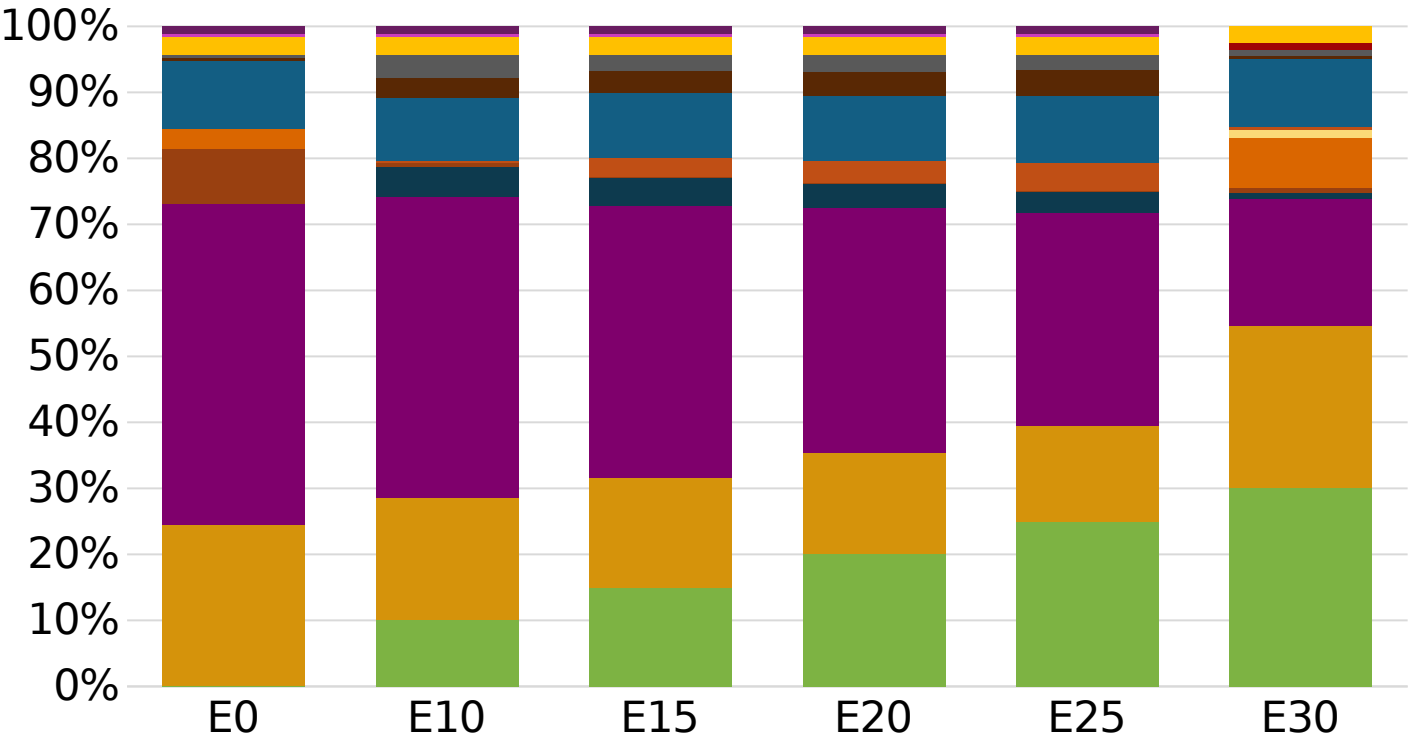

Average CIF 2025
Prices

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).

The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:


- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

**Source: Bureau of transportation statistics.*

Main Results

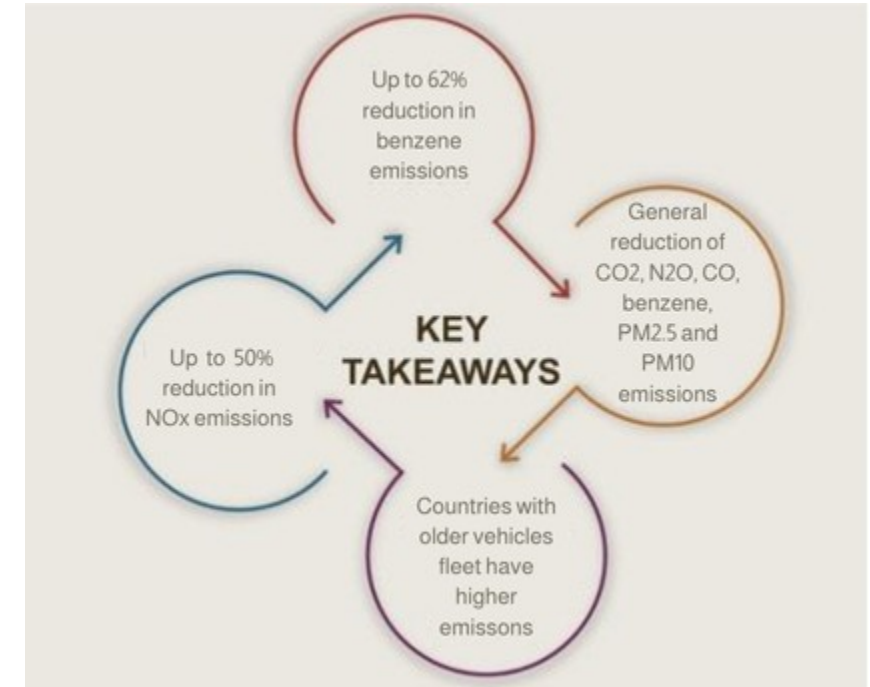

Gasoline Vehicle Fleet - Ireland







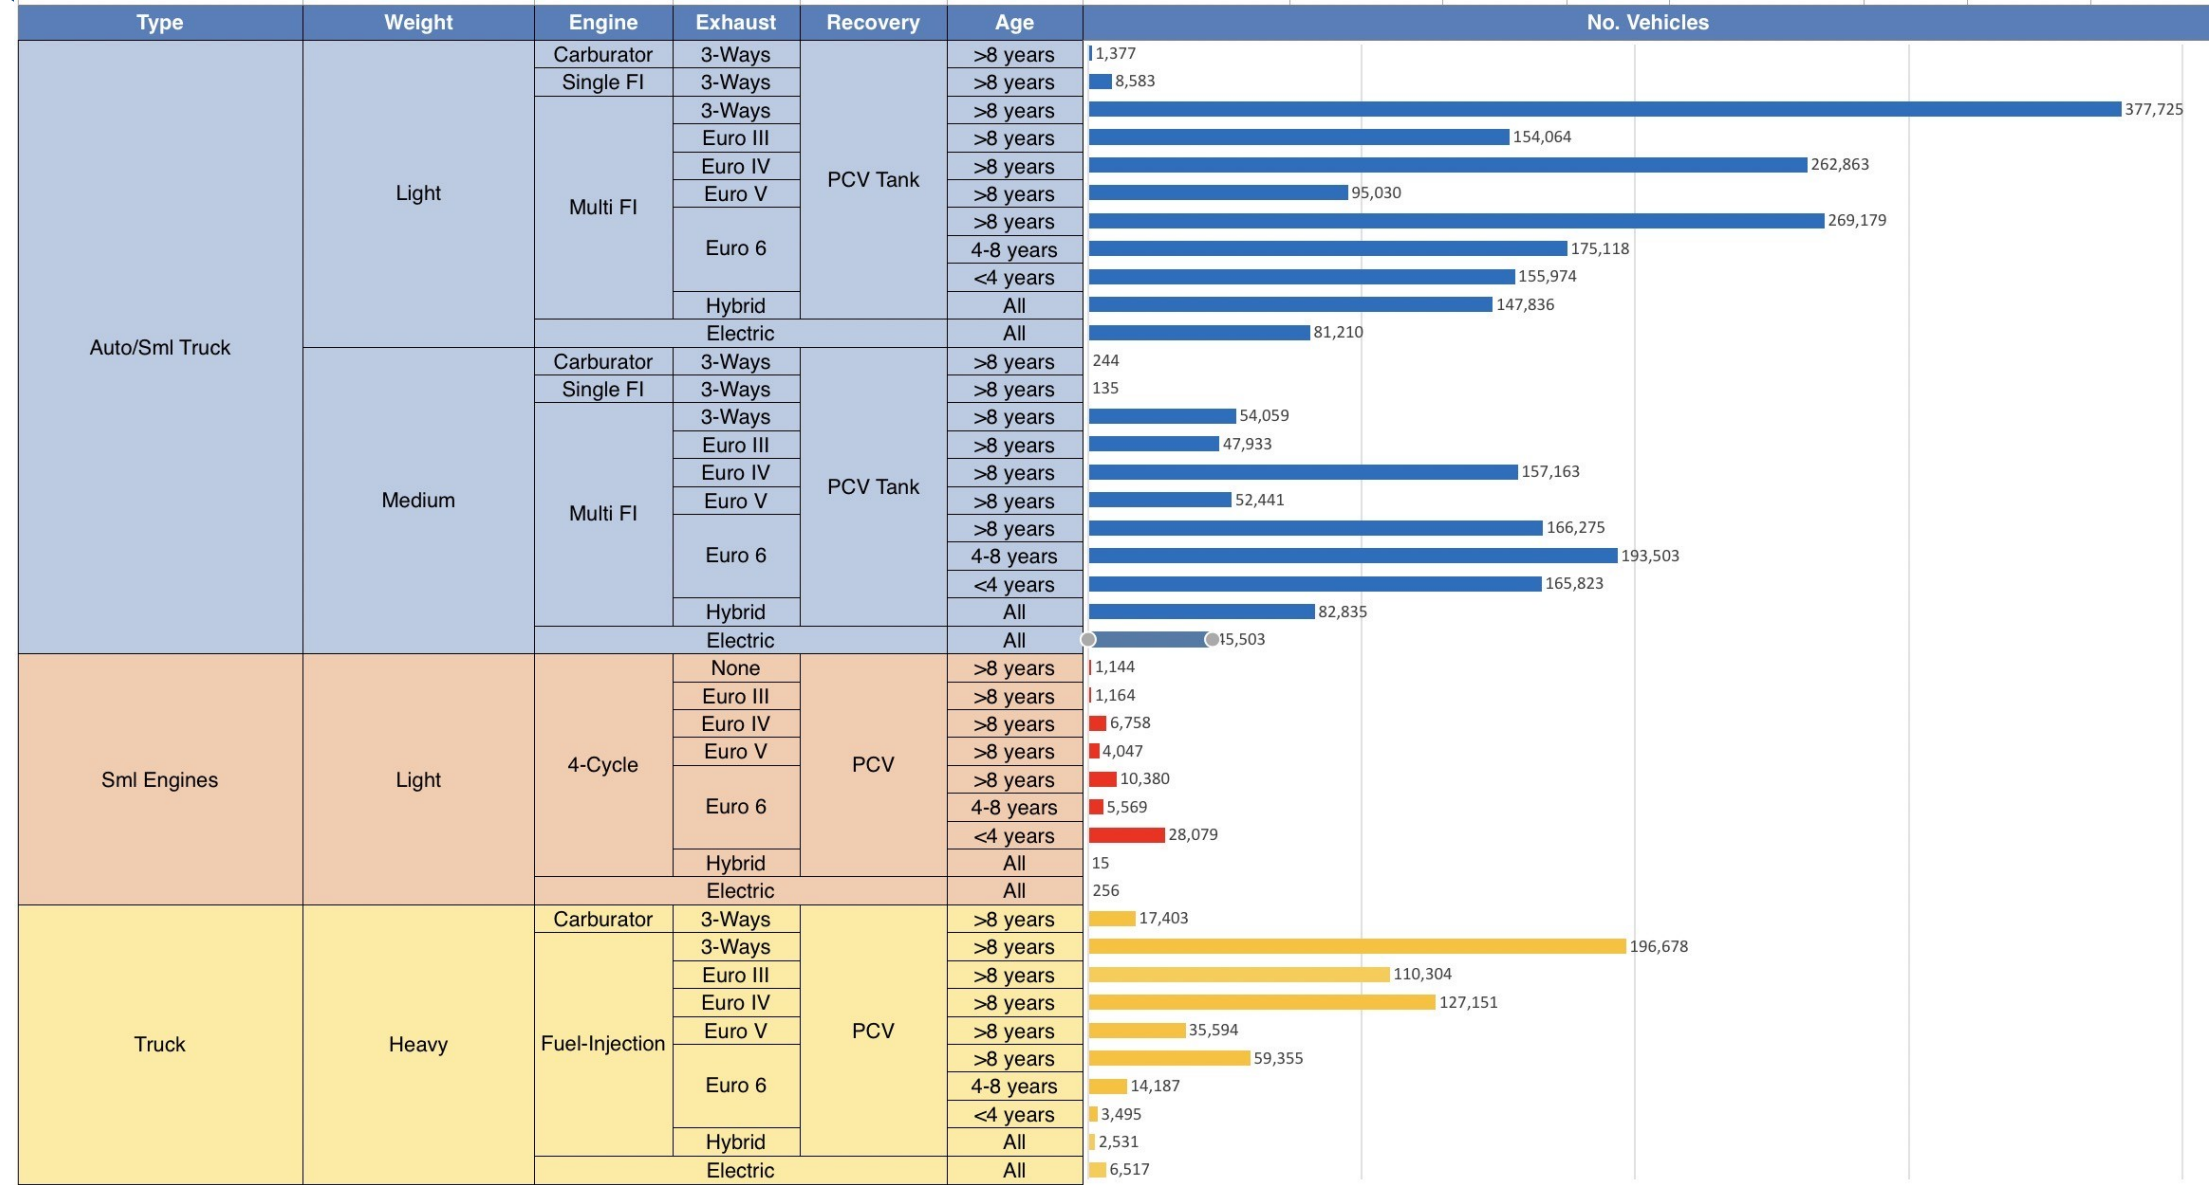


Vehicle Fleet: 3,325,499
Gasoline Vehicle Fleet: 966,996

Source: Eurostat, ACEA

Ireland – Vehicular Emissions

— TIER III BIN 125 United States
— Euro 6 Standard

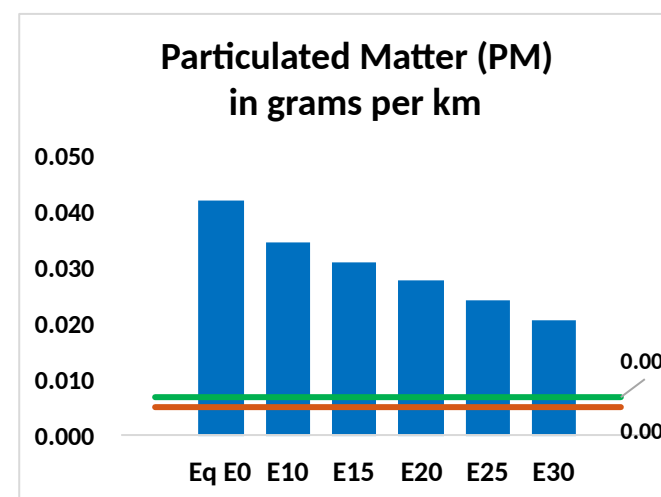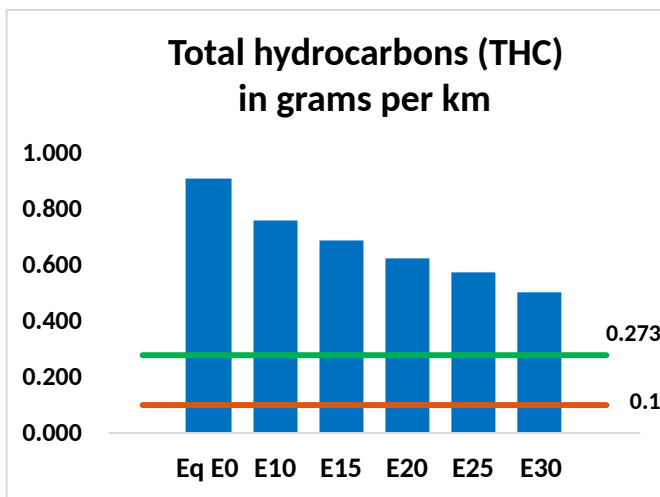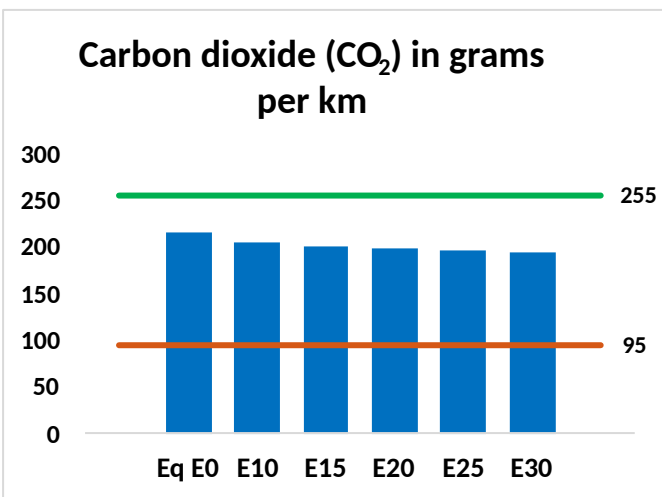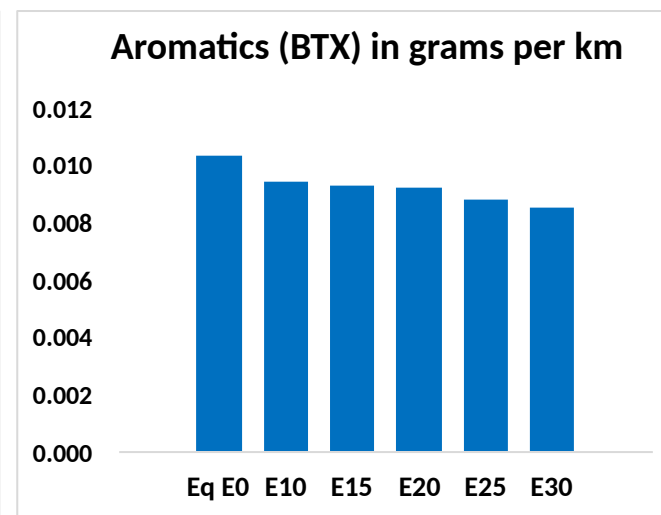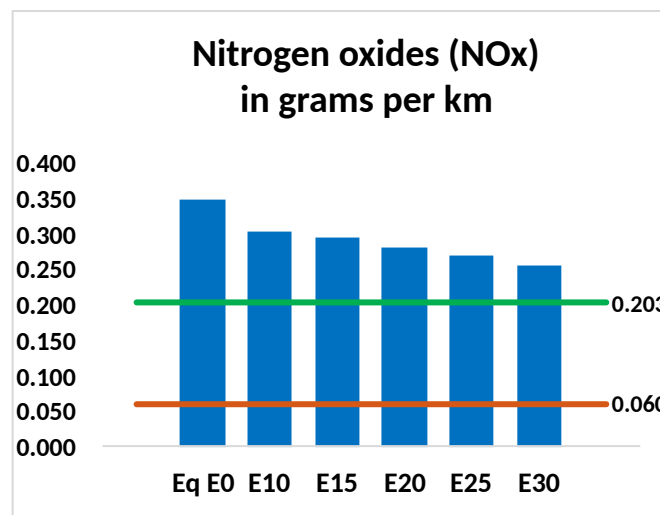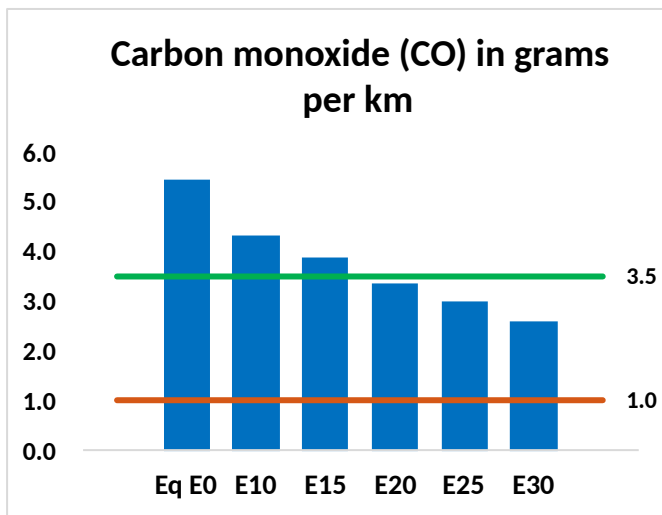

Ireland – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	139,173	125,025	110,877	98,610	85,956	76,132	66,042	-20%	-38%
CO2	5,492,683	5,351,443	5,218,049	5,113,139	5,061,225	5,031,145	4,938,406	-5%	-8%
VOC	23,262	21,268	19,274	17,599	15,896	14,580	12,845	-17%	-32%
NOx	8,888	8,207	7,750	7,523	7,151	6,862	6,521	-13%	-20%
SOx	63	58	54	50	46	42	37	-15%	-28%
NH3	2,022	2,002	1,982	1,991	2,013	2,029	2,042	-2%	0%
N2O	107	106	106	106	108	109	111	-1%	2%
CH4	4,627	4,627	4,627	4,696	4,798	4,886	4,969	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	126	119	113	108	103	100	95	-10%	-18%
Acetaldehyde	385	442	648	987	1,345	1,536	1,816	68%	249%
Formaldehyde	1,422	1,383	1,612	1,893	1,983	2,194	2,388	13%	39%
Benzene	264	254	241	237	235	225	217	-9%	-11%
PM2.5	314	286	257	232	207	181	153	-18%	-34%
PM10	759	690	621	560	501	437	370	-18%	-34%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2025 country emission are those published by **IPCC**.


Current GHG Global Emissions Distribution

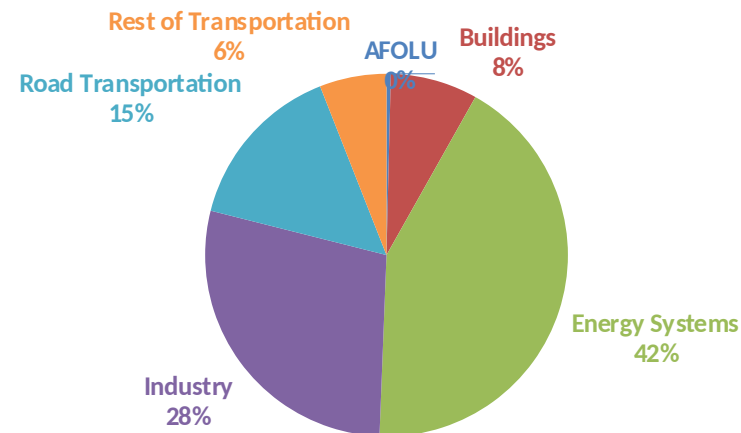

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

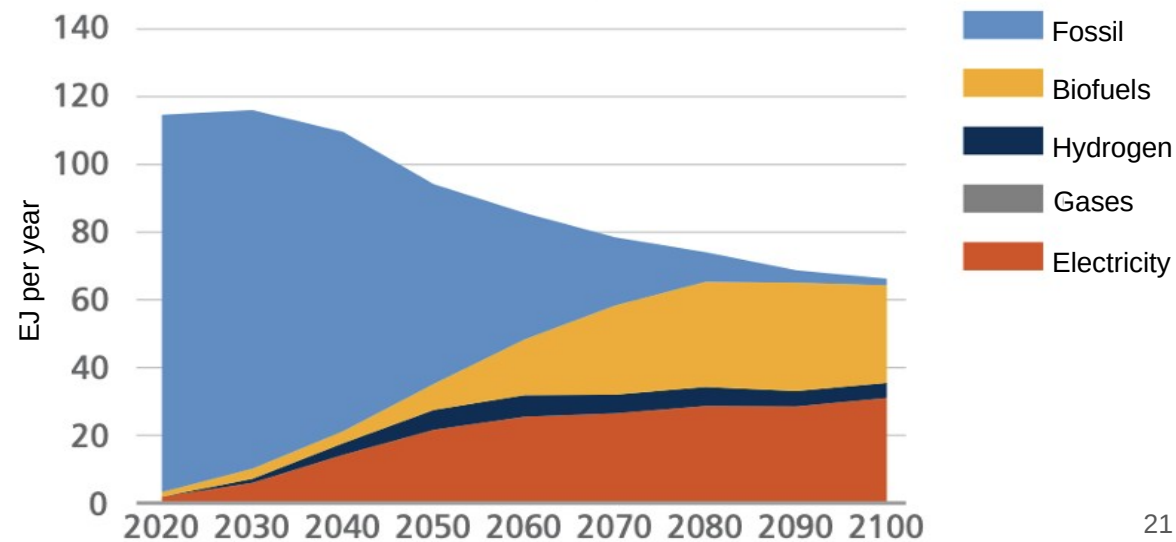

Ireland – Gasoline Vehicle Fleet Life Cycle GHG Emissions

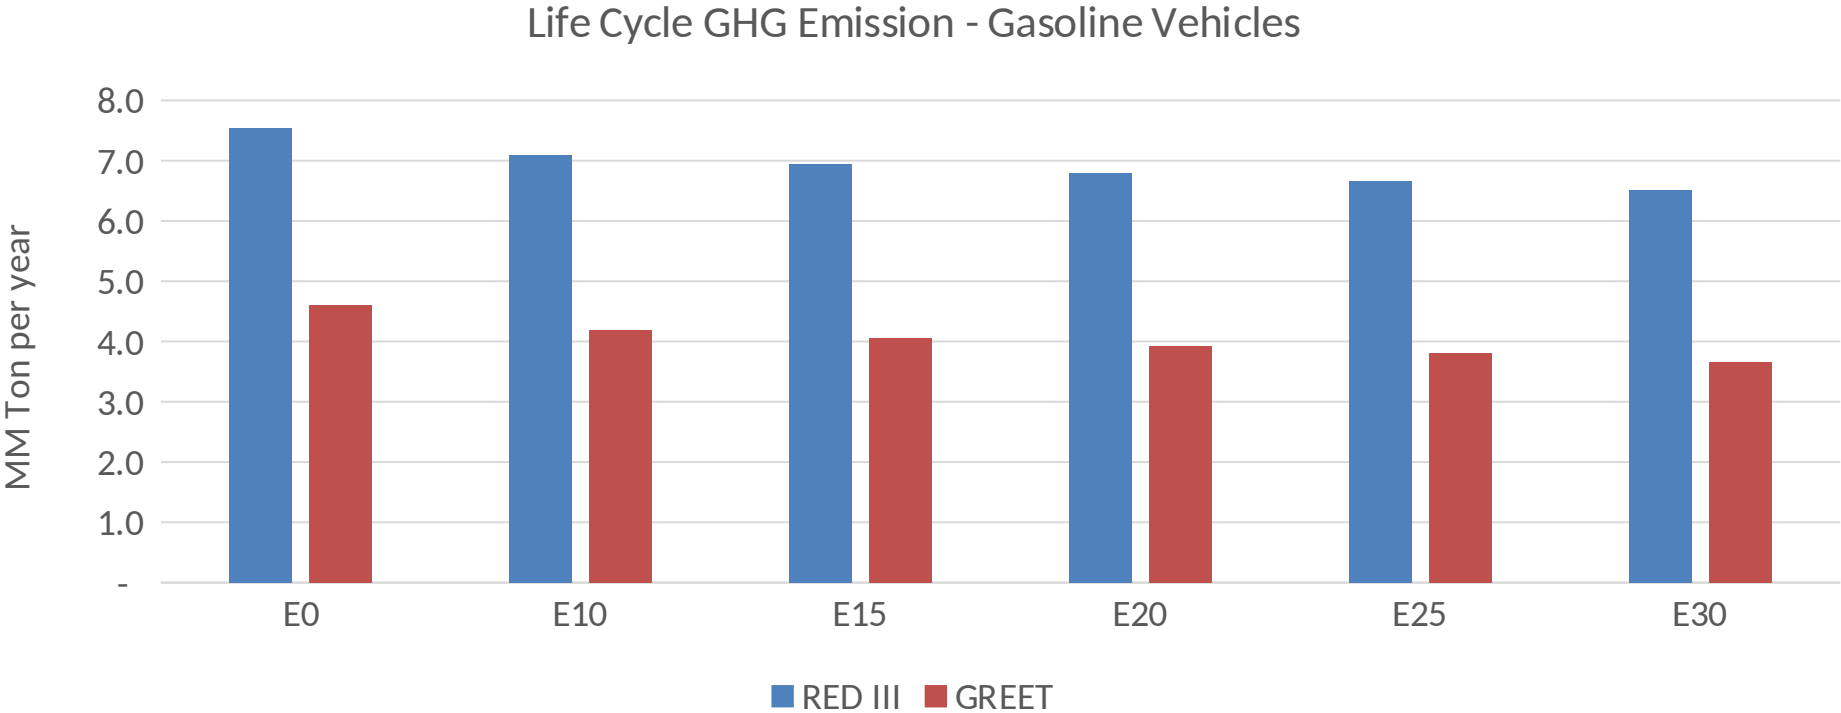

Country Emissions 2025 (MMT/año)	70.0
Target @ 2035 (MMT/year)	39.4
Delta	30.6

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90