


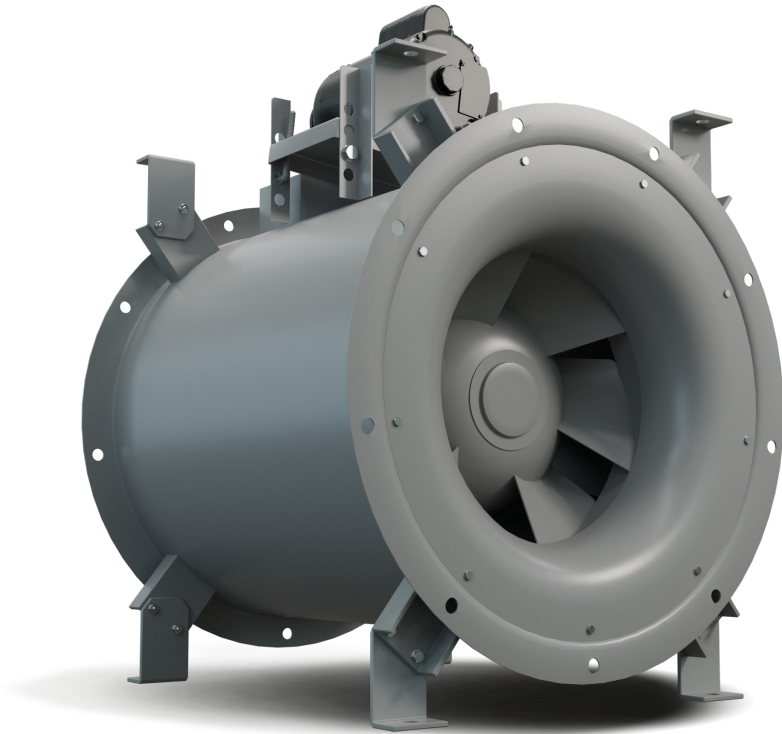


Belt Direct Mixed Flow Fans


IMF-B SERIES

FEATURES

- High performance mixed flow fan
- High efficiency wheel with very low sound levels
- Sizes and capacities up to 43,000 CFM
- Tested in accordance with AMCA
- Statically and dynamically balanced to AMCA 204

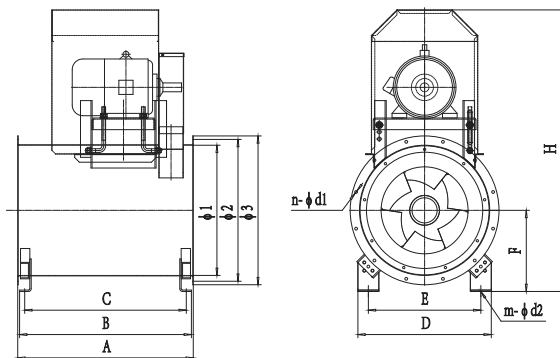

IMF-B400-500 BASE MOUNTED

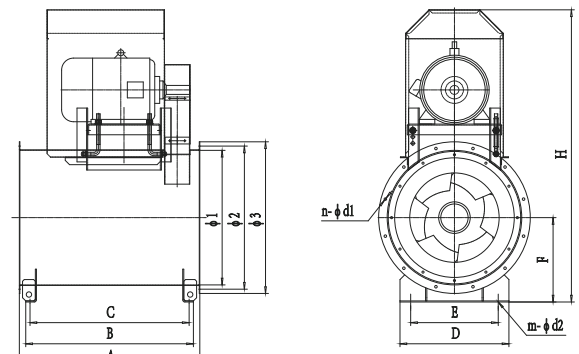


IMF-B560-1250 BASE MOUNTED


IMF-B SERIES

Belt Direct Mixed Flow Fans

DIMENSIONS

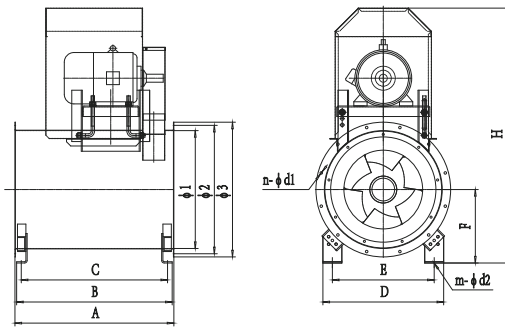

IMF-B400-500 BASE MOUNTED

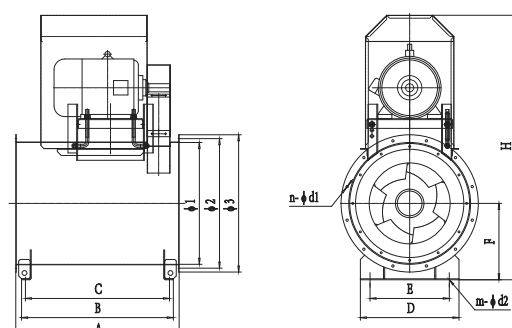

IMF-B560-1250 BASE MOUNTED

MODEL	Dimensions all in Inches												Weight (lbs)
	ø1	ø2	ø3	A	B	C	D	E	F	H (max)	n - ød1	m - ød2	
IMF-B400	18	19	21	25	25	23	19	16	12	41	8 - ø12	4 - ø18	145
IMF-B450	20	22	23	28	28	26	21	18	13	44	8 - ø12	4 - ø18	169
IMF-B500	22	24	25	30	29	27	23	19	14	48	8 - ø12	4 - ø18	207
IMF-B560	25	27	28	33	31	29	22	18	16	54	12 - ø12	4 - ø18	279
IMF-B630	28	30	31	37	35	33	24	20	17	57	12 - ø12	4 - ø18	372
IMF-B710	32	34	35	39	37	35	28	24	19	62	12 - ø12	4 - ø18	425
IMF-B800	36	38	39	44	40	38	31	27	21	66	16 - ø14	4 - ø18	515
IMF-B900	40	42	43	49	46	44	35	31	23	71	16 - ø14	4 - ø18	658
IMF-B1000	44	47	48	51	46	44	39	34	26	78	16 - ø14	6 - ø18	849
IMF-B1120	50	52	54	57	52	50	44	39	29	87	20 - ø14	6 - ø18	1098
IMF-B1250	56	58	60	64	59	57	49	44	31	96	20 - ø14	6 - ø18	1379

Dimensions provided are for reference only and may differ from the actual drawings.

The weight of the fan does not include motor.

PERFORMANCE SPECIFICATIONS

MODEL	MAX HP	STATIC PRESSURE, INCHES W.G.																
		0	0.25	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6
IMF-B400	3	3700	3650	3600	3550	3500	3450	3350	3300	3250	3100	3000	2850	2700	2500	2200	1750	--
IMF-B450	5	4700	4650	4600	4500	4450	4400	4300	4250	4150	4000	3850	3650	3450	3250	2900	--	--
IMF-B500	7.5	6650	6550	6500	6400	6300	6200	6150	6050	5950	5700	5500	5250	5000	4750	4350	3850	3000
IMF-B560	10	8400	8300	8200	8050	7950	7850	7750	7600	7500	7200	6950	6650	6350	6000	5550	4900	--
IMF-B630	10	10550	10400	10250	10100	9950	9850	9700	9550	9350	9050	8700	8300	7900	7450	6800	6000	--
IMF-B710	10	12900	12750	12600	12400	12250	12100	11950	11750	11550	11150	10750	10300	9850	9250	8400	--	--
IMF-B800	15	16450	16250	16050	15850	15650	15450	15250	15000	14800	14350	13850	13250	12600	11900	10800	--	--
IMF-B900	15	20650	20400	20150	19900	19650	19400	19150	18850	18550	17950	17350	16550	15750	14750	13350	11900	--
IMF-B1000	25	27350	27000	26700	26350	26000	25700	25300	24900	24550	23500	22800	21900	20700	19500	17850	15950	11450
IMF-B1120	40	34900	34500	34100	33650	33250	32800	32400	31900	31450	30400	29350	27500	26800	25350	23550	21250	17650
IMF-B1250	40	43250	42750	42200	41700	41200	40650	40150	39600	38950	37600	36300	34850	33050	31250	28900	26000	--

Options & Accessories For Tube Axial Duct Fans

When ordering, replace "T" in the Model Number (in the Performance Specification Chart) with ALL accessory code as shown on this page.

Options must be requested at time of order, as they cannot be added later.
Non-stock, made-to-order products are non-returnable and cannot be cancelled.



DISCONNECT SWITCH

Accessory Code: **A**

See page K4 in Controls & Thermostats section for more information.

Ships loose.

Available as an accessory ordered separately.



INLET GUARDS OUTLET GUARD

Accessory Code:

B Inlet | J Outlet

Spiral plated OSHA guard. Fits intake or exhaust. Can be used in conjunction with companion ring.

To order installed, add letter to part number.

Also available as an accessory ordered separately.



CR - COMPANION RING

Accessory Code: **C**

1/4" plate angle ring. Used to attach guards or ducts to tube axial fans.

To order installed, add letter to part number.

Also available as an accessory ordered separately.



SCV - VERTICAL SUPPORT CLIPS


Accessory Code: **D**

1/4" plate horizontal support clips.

Bolts to the vertical support clips welded to the fan. Two clips per end.

Must be used with vertical clips (D).

Must be requested at time of order.



SCH - HORIZONTAL SUPPORT CLIP


Option Code: **K**

Heavy duty support legs welded to the fan.

Suitable for floor-mount tube axial fans. 4" standard; 16" available (consult factory).

Sold in pairs.

Must be requested at time of order.



SPL - SUPPORT LEGS

Accessory Code: **E**

Heavy duty support legs welded to the fan. Suitable for floor-mount tube axial fans.

4" standard; 16" available (consult factory).

Sold in pairs. Must be requested at time of order.



MCVR - MOTOR & BELT COVER

Accessory Code: **F**

8-gauge galvanized steel. Acts as both motor and belt cover.

3/4" expanded-metal screen allows motor heat escape.

Bolts to motor mount.

For HTA/BTA/WTa fans only. To order installed, add letter to part number.

Also available separately.



BLG - BELT GUARD

Accessory Code: **G**


Protects belts and drives. 18-gauge galvanized steel.

For HTA/BTA/WTa fans only.

Not required if using Motor Cover (F).

To order installed, add letter to part number.

Also available separately.



ID - INSPECTION DOOR


Accessory Code: **H**

10" x 12" hinged and bolted door.

Air-dry finish.

Can be installed in a location specified by customer.

Must be requested at time of order.



WC - WEATHER COVER

Accessory Code: **L**

18-gauge galvanized steel. Acts as both motor and belt cover.

Fully enclosed for weather protection.

Bolts to motor mount.

For HTA/BTA/WTa fans only. To order installed, add letter to part number.

Also available separately.

SPECIALS

Accessory Code: **I**

Explosion-proof motors

Steel fan blades

Optional coating

Must be requested at time of order.

ORDERING EXAMPLES



EX 1) If ordering a BTA18T10050 with support legs (E) and an inspection door (H), use E & H here: **BTA18EH10050**.

EX 2) If ordering a BTA18T10050 with horizontal clips & belt guard, use **BTA18DKG10050**.

WIRED JUNCTION BOX

Option Code: **W**

Wired junction box using BX cable.

For BTA models only.

Must be requested at time of order.

ACCESSORIES				OPTIONS INSTALLED WELDED TO TUBE			ACCESSORIES		
FAN SIZE	COMPANION RING	GUARD	HORIZONTAL CLIP	SUPPORT LEG	VERTICAL CLIP	INSPECTION DOOR	BTA SIZE	WEATHER COVER	MOTOR COVER
12"	CR12P	MC12G	SCH12-60 (Must order vertical clip accessory)	SPL12	SCV12-60	ID12	12" - 18"	MCVR1-WP	MCVR1
15"	CR15P	MC15G		SPL15		ID15	24" - 30"	MCVR2-WP	MCVR2
18"	CR18P	MC18G		SPL18		ID18	34" - 36"	MCVR3-WP	MCVR3
20"	CR20P	MC20G		SPL20		ID20	42" - 48"	MCVR4-WP	MCVR4
24"	CR24P	MC24G		SPL24		ID24	54" - 60"	MCVR5-WP	MCVR5
30"	CR30P	MC30G		SPL30		ID30			
34"	CR34P	MC34G		SPL34		ID34			
36"	CR36P	MC36G		SPL36		ID36			
42"	CR42P	MC42G		SPL42		ID42			
48"	CR48P	MC48G		SPL48		ID48			
54"	CR54P	MC54G		SPL54		ID54			
60"	CR60P	MC60G		SPL60		ID60			
ACCESSORIES									
FRAME SIZE							BELT GUARD		
48 - 145T							BLGD1		
182T - 184T							BLGD2		
213T - 256T							BLGD3		
284 AND UP							BLGD4		