

序号No.	配件名称 Spare Parts	材料 Material	6	填料 Packing	PTFE	12	伞齿轮 Bevel Gear	组合件Assembly
1	阀体 Body	CF8	7	压条 Packing Gland	CF8			
2	阀座 Seat	EPDM+PTFE	8	夹头 Chuck	WCB		标准件 Bolts/Nuts	A2-70
3	楔块 Wedge	CF8	9	阀杆 Stem	304			
4	闸板 Disc	304	10	支架板 Yoke	Q235 (Cr. D)			
5	导向垫 Guide Pad	PTFE	11	支架头 Yoke Head	GGG40			

备注 (Note): 1、设计按 (Design): JB/T8691-2013
2、法兰按 (Flange): GB/T9113.1-2010
3、结构长度按 (Face to face):
GB/T15188.2-94 chart6-7
4、试验和验收 (Testing): GB/T13927-2022

刀闸阀主要外形及连接尺寸

Outline and Dimension

型号 Model: QBZ573X-10



通径	尺寸 size										
DN (mm)	L	D	D1	D2	D0	N-Th	T	●	⊕	d	H1
50	48	165	125	99	250	4-M16	12	2	2	Ø18	342
65	48	185	145	118	250	4-M16	12	2	2	Ø18	370
80	51	200	160	132	250	8-M16	12	2	6	Ø18	405
90	51	210	170	142	250	8-M16	12	2	6	Ø18	430
100	51	220	180	156	250	8-M16	12	2	6	Ø18	456
125	57	250	210	184	250	8-M16	14	2	6	Ø18	505
150	57	285	240	211	250	8-M20	14	2	6	Ø23	550
175	57	305	265	237	250	12-M20	14	4	8	Ø23	600
200	70	340	295	266	250	8-M20	18	2	6	Ø23	650
225	70	350	310	282	250	12-M20	18	6	6	Ø23	710
250	70	395	350	319	250	12-M20	18	4	8	Ø23	760
300	76	445	400	370	250	12-M20	20	6	6	Ø23	820
350	76	505	460	429	300	16-M20	20	10	6	Ø23	890
400	89	565	515	480	300	16-M24	24	10	6	Ø27	960
450	89	615	565	530	450	20-M24	24	14	6	Ø27	1110
500	114	670	620	582	450	20-M24	27	14	6	Ø27	1210
550	114	725	680	638	450	20-M27	27	14	6	Ø30	1270
600	114	780	725	682	500	20-M27	27	14	6	Ø30	1390
650	114	845	780	732	500	24-M27	27	16	8	Ø30	1460
700	127	895	840	794	500	24-M27	27	16	8	Ø30	1540
750	127	970	900	855	500	24-M30	30	16	8	Ø33	1620
800	127	1015	950	901	600	24-M30	30	16	8	Ø33	1710
850	127	1070	1000	955	600	28-M30	30	20	8	Ø33	1780
900	127	1115	1050	1001	600	28-M30	30	20	8	Ø33	1880
1000	149	1230	1160	1112	600	28-M33	33	20	8	Ø36	2090
1100	149	1340	1260	1220	600	28-M33				Ø36	2180
1200	156	1455	1380	1328	600	32-M36				Ø39	2270
1350	171	1630	1540	1480	600	36-M39				Ø42	2510
1400	171	1675	1590	1530	600	36-M39				Ø42	2610
1500	198	1795	1705	1640		40-M39				Ø42	2790
1600	198	1915	1820	1750		40-M45				Ø48	2970
1800	219	2115	2020	1950		44-M45				Ø48	3290
2000	250	2325	2230	2150		48-M45				Ø48	3650

参考 (Reference) H1


Ød

N-Th
(Depth): T


● 盲孔 (Blind threaded) ⊕ 对穿通孔 (Tapping through)

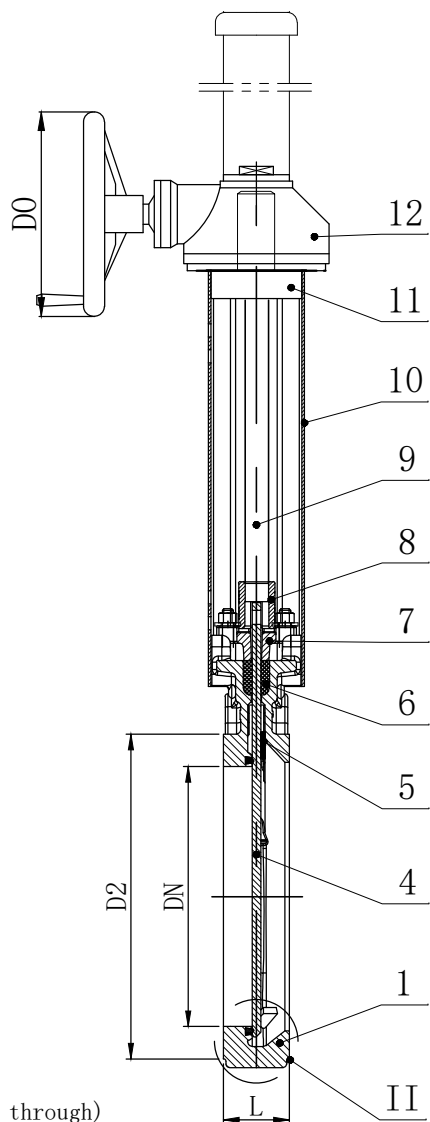

DN50-200




DN250-2000




DN50-400

Detail II



DN450-2000



DN500-2000

刀闸阀 Knife Gate Valve



QBZ573X-10P

奇胜阀门有限公司

CHISUN VALVE CO., LTD