

序号No.	配件名称 Spare Parts	材料 Material	6	支架板 Yoke	Q235		标准件 Bolts/Nuts	A2-70
1	阀体 Body	WCB	7	阀杆 Stem	2CR13			
2	密封橡胶 Sealing Ring	EPDM	8	安装板 Mounting plate	Q235 (Cr. D)			
3	闸板 Disc	304	9	支架头 Yoke head	Q235 (Cr. D)			
4	导向垫 Guide Pad	PTFE	10	连接套 Connecting	Q235 (Cr. D)			
5	填料 Packing	PTFE+EPDM	11	伞齿轮 Bevel gear	组合件 Assembly			


备注 (Note): 1、设计按 (Design): JB/T8691-2013
2、法兰按 (Flange): GB/T9113.1-2010
3、结构长度按 (Face to face):
GB/T15188.2-94 chart6-7
4、试验和验收 (Testing): GB/T13927-2022

刀闸阀主要外形及连接尺寸 Outline and Dimension

型号 Model: QMCZ573X-10C

通径	尺寸 size								
DN (MM)	L	D	D1	D2	N-Th	T	●	⊕	d
50	48	165	125	99	4-M16	13	2	2	φ19
65	48	185	145	118	4-M16	13	2	2	φ19
80	51	200	160	132	8-M16	15	2	6	φ19
100	51	220	180	156	8-M16	15	2	6	φ19
125	57	250	210	184	8-M16	15	2	6	φ19
150	57	285	240	211	8-M20	18	2	6	φ23
200	70	340	295	266	8-M20	18	4	8	φ23
250	70	395	350	319	12-M20	18	4	8	φ23
300	76	445	400	370	12-M20	18	4	8	φ23
350	76	505	460	429	16-M20	18	6	10	φ23
400	89	565	515	480	16-M24	22	6	10	φ27
450	89	615	565	530	20-M24	22	8	12	φ27
500	114	670	620	582	20-M24	22	8	12	φ27
600	114	780	725	682	20-M27	27	8	12	φ30
700	127	895	840	794	24-M27	27	10	14	φ30
800	127	1015	950	901	24-M30	30	10	14	φ33
900	127	1115	1050	1001	28-M30	30	12	16	φ33
1000	149	1230	1160	1112	28-M33	33	12	16	φ36

● 盲孔 (Blind threaded)
⊕ 对穿通孔 (Tapping through)

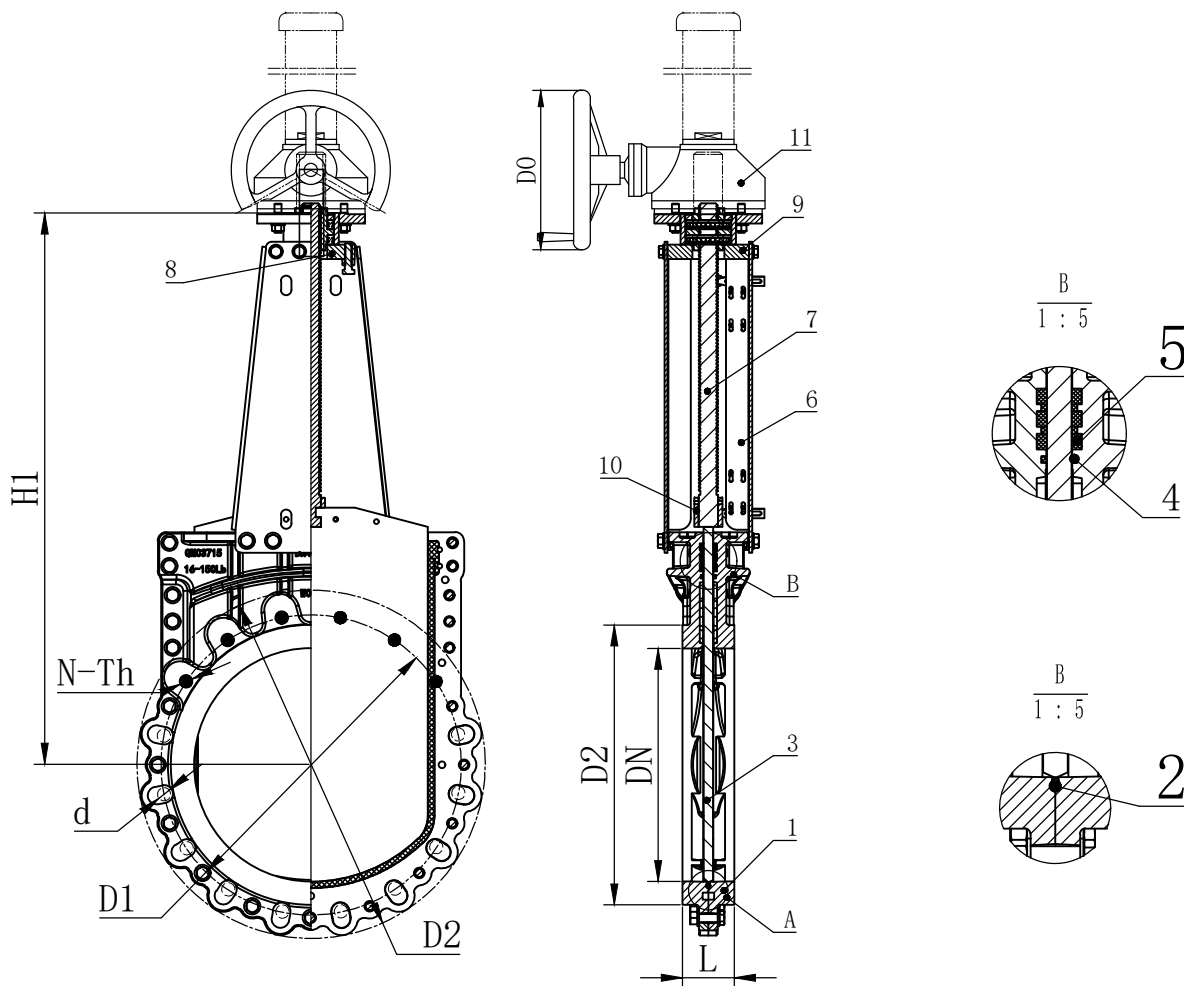

刀闸阀 Knife Gate Valve

QMCZ573X-10C

奇胜阀门有限公司

CHISUN VALVE CO., LTD



总装图