


序号No.	配件名称 Spare Parts	材料 Material	6	连接套 Connecting sleeve	Q235 (Cr.D)	12	手轮 Handwheel	玛钢 GGG40
1	阀体 Body	WCB	7	支架板 Yoke	Q235 (Cr.D)	13	并帽 Cap	Q235 (Cr.D)
2	密封橡胶 Sealing Ring	EPDM	8	阀杆 Stem	2Cr13 (SS420)		标准件 Bolts/Nuts	A2-70
3	闸板 Disc	SS304	9	铜螺母 Nut	压铸黄铜 Brass			
4	导向垫 Guide Pad	PTFE	10	支架头 Yoke head	Q235 (Cr.D)			
5	填料 Packing	PTFE+EPDM	11	轴承 Bearing	GCr15			

备注 (Note): 1、设计按 (Design): JB/T8691-2013
2、法兰按 (Flange): GB/T9113.1-2010
3、结构长度按 (Face to face):
GB/T15188.2-94 chart6-7
4、试验和验收 (Testing): GB/T13927-2022

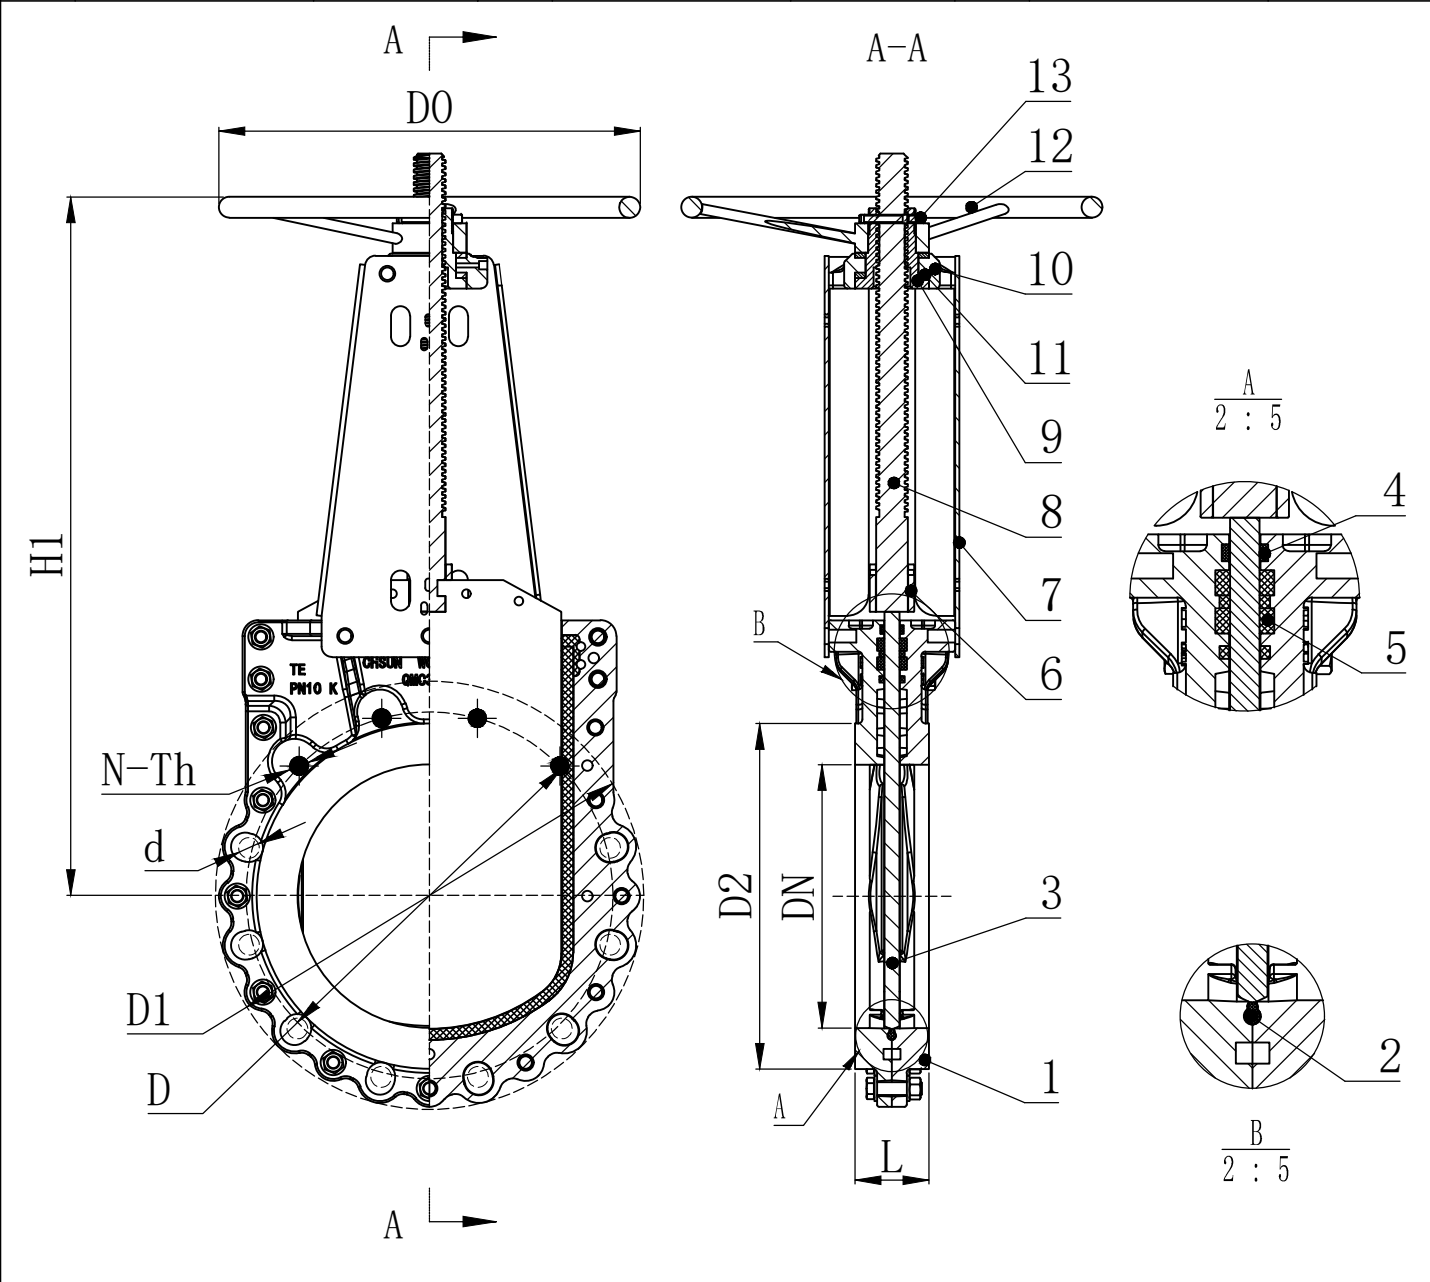

刀闸阀主要外形及连接尺寸
Outline and Dimension

型号Model:QMCZ73X-10C

DN (MM)	尺寸 size									
	L	D	D1	D2	D0	N-Th	d	●	⊕	
50	48	165	125	99	220	4-M16	18	2	2	
65	48	185	145	118	220	8-M16	18	2	2	
80	51	200	160	132	240	8-M16	18	2	6	
100	51	220	180	156	260	8-M16	18	2	6	
125	57	250	210	184	280	8-M16	18	2	6	
150	57	285	240	211	320	8-M20	23	2	6	
200	70	340	295	266	350	8-M20	23	2	6	
250	70	395	350	319	400	12-M20	23	4	8	
300	76	445	400	370	450	12-M20	23	4	8	
350	76	505	460	429	500	16-M20	23	6	10	
400	89	565	515	480	500	16-M24	27	6	10	

● 盲孔 (Blind threaded)
⊕ 对穿通孔 (Tapping through)

刀闸阀 Knife Gate Valve

QMCZ73X-10C

奇胜阀门有限公司

CHISUN VALVE CO., LTD



chisun

总装图