

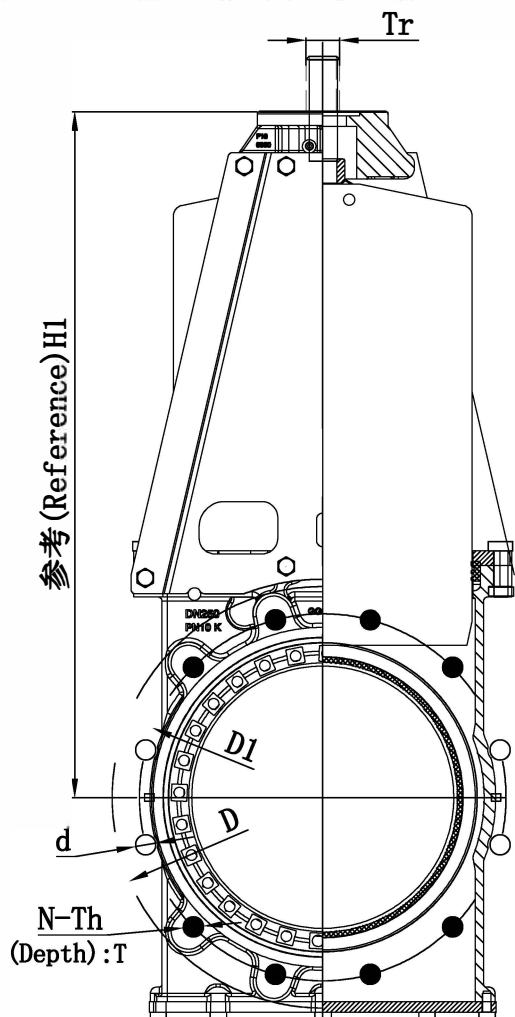
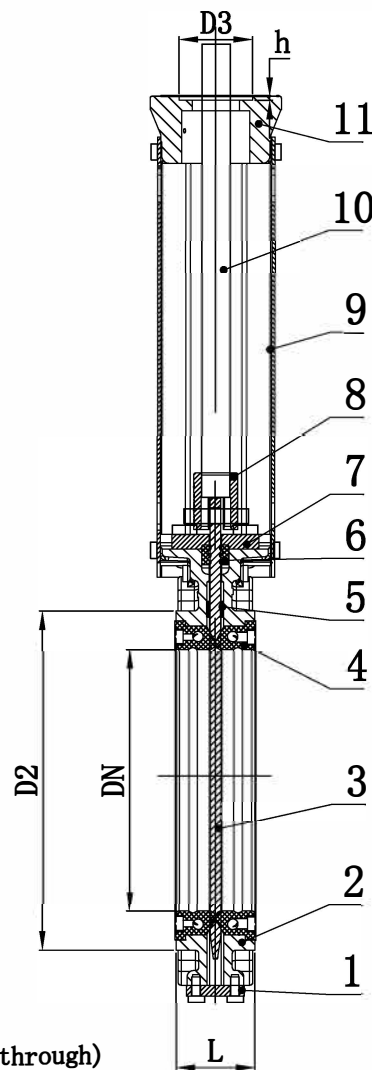





序号No.	配件名称 Spare Parts	材料 Material	5	导向垫 Guide Pad	PU	10	阀杆 Stem	2Cr13(SS420)
1	底板 Bottom plate	Q235(Cr. D)	6	填料 Packing	PTFE (EPDM)	11	支架头 Yoke head	GGG40
2	阀体 Body	GGG40	7	压板 Packing Gland	Q235(Cr. D)		标准件 Bolts/Nuts	A2-70
3	闸板 Disc	SS304	8	夹头 Chuck	WCB			
4	阀座 Seat	NR	9	支架板 Yoke	Q235(Cr. D)			

	D1	D2	D3	n-d	h
F10	125	102	70	4- ϕ 12	4
F12	150	125	85	4- ϕ 14	4
F14	175	140	100	4- ϕ 18	5
F16	210	165	130	4- ϕ 22	6
F20	250	205	140	8- ϕ 18	6
F25	300	254	200	8- ϕ 18	6
F30	350	298	230	8- ϕ 22	6



● 盲孔(Blind threaded) ⊕ 对穿通孔(Tapping through)



备注(Note): 1、设计按(Design): JB/T8691-2013
2、法兰按(Flange): GB/T9113.1-2010
3、结构长度按(Face to face): GB/T15188.2-94 chart6-7
4、试验和验收(Testing): GB/T13927-2022

刀闸阀主要外形及连接尺寸

Outline and Dimension

型号Model: QWZ73NR-10															ISO平台
通径	尺寸 size														
DN (mm)	L	L1	D	D1	D2	Tr	N-Th	T	●	⊕	d	H1			
50	53	55	165	125	99	Tr18*4	4-M16	12	4	0	018	306	F10		
65	53	55	185	145	118		4-M16	12	4	0	018	306	F10		
80	55	57	200	160	132		8-M16	12	4	4	018	334	F10		
90	55	57	210	170	142	Tr20*4	8-M16	12	4	4	018	354	F10		
100	55	57	220	180	156		8-M16	12	4	4	018	374	F10		
125	62	64	250	210	184		8-M16	14	4	4	018	423	F10		
150	62	64	285	240	211		8-M20	14	4	4	023	482	F10		
175	62	64	305	265	237	Tr24*5	12-M20	14	8	4	023	523	F10		
200	75	77	340	295	266		8-M20	18	4	4	023	564	F10		
225	75	77	350	310	282		12-M20	18	8	4	023	609	F10		
250	75	77	395	350	319	Tr26*5	12-M20	18	8	4	023	654	F10		
300	82	84	445	400	370		12-M20	20	8	4	023	757	F10		
350	82	84	505	460	429	Tr30*6	16-M20	20	12	4	023	866	F12		
400	95	99	565	515	480		16-M24	24	12	4	027	953	F12		
450	95	99	615	565	530	Tr32*6	20-M24	24	16	4	027	1039	F14		
500	125	129	670	620	582		20-M24	27	16	4	027	1149	F14		
550	125	129	725	680	638	Tr36*6	20-M27	27	16	4	030	1259	F14		
600	125	129	780	725	682		20-M27	27	16	4	030	1368	F14		
650	125	129	845	780	732		24-M27	27	20	4	030	1435	F14		
700	138	143	895	840	794	Tr38*7	24-M27	27	20	4	030	1502	F16		
750	138	143	970	900	855		24-M30	30	20	4	033	1601	F16		
800	138	143	1015	950	901		24-M30	30	20	4	033	1700	F20		
850	138	143	1070	1000	955	Tr42*7	28-M30	30	24	4	033	1845	F20		
900	138	143	1115	1050	1001		28-M30	30	24	4	033	1991	F20		
1000	159	165	1230	1160	1112	Tr48*8	28-M33	33	24	4	036	2281	F20		
1100	159	165	1340	1260	1220	Tr50*8	28-M33	33	24	4	036		F25		
1200	166	172	1455	1380	1328	Tr52*8	32-M36	36	28	4	039		F25		
1350	181	187	1630	1540	1480	号2	36-M39	39	32	4	042		F25		
1400	181	187	1675	1590	1530	Tr55*8	36-M39	39	32	4	042		F30		
1500	208	214	1795	1705	1640	号2	40-M39	39	36	4	042		F30		
1600	208	214	1915	1820	1750	Tr60*10	40-M45	45	36	4	048		F30		
						号2									
1800	229	235	2115	2020	1950	Tr65*12	44-M45	45	40	4	048		F30		
2000	260	266	2325	2230	2150	号2	48-M45	45	44	4	048		F30		

刀闸阀 Knife Gate Valve

QWZ73NR-10G-ISO平台

奇胜阀门有限公司

CHISUN VALVE CO., LTD

