


Thai BIM Stair synthetic | S001 | Stair plan / all levels

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage


USER NOTE ไทย: รอยต่อขานพัก

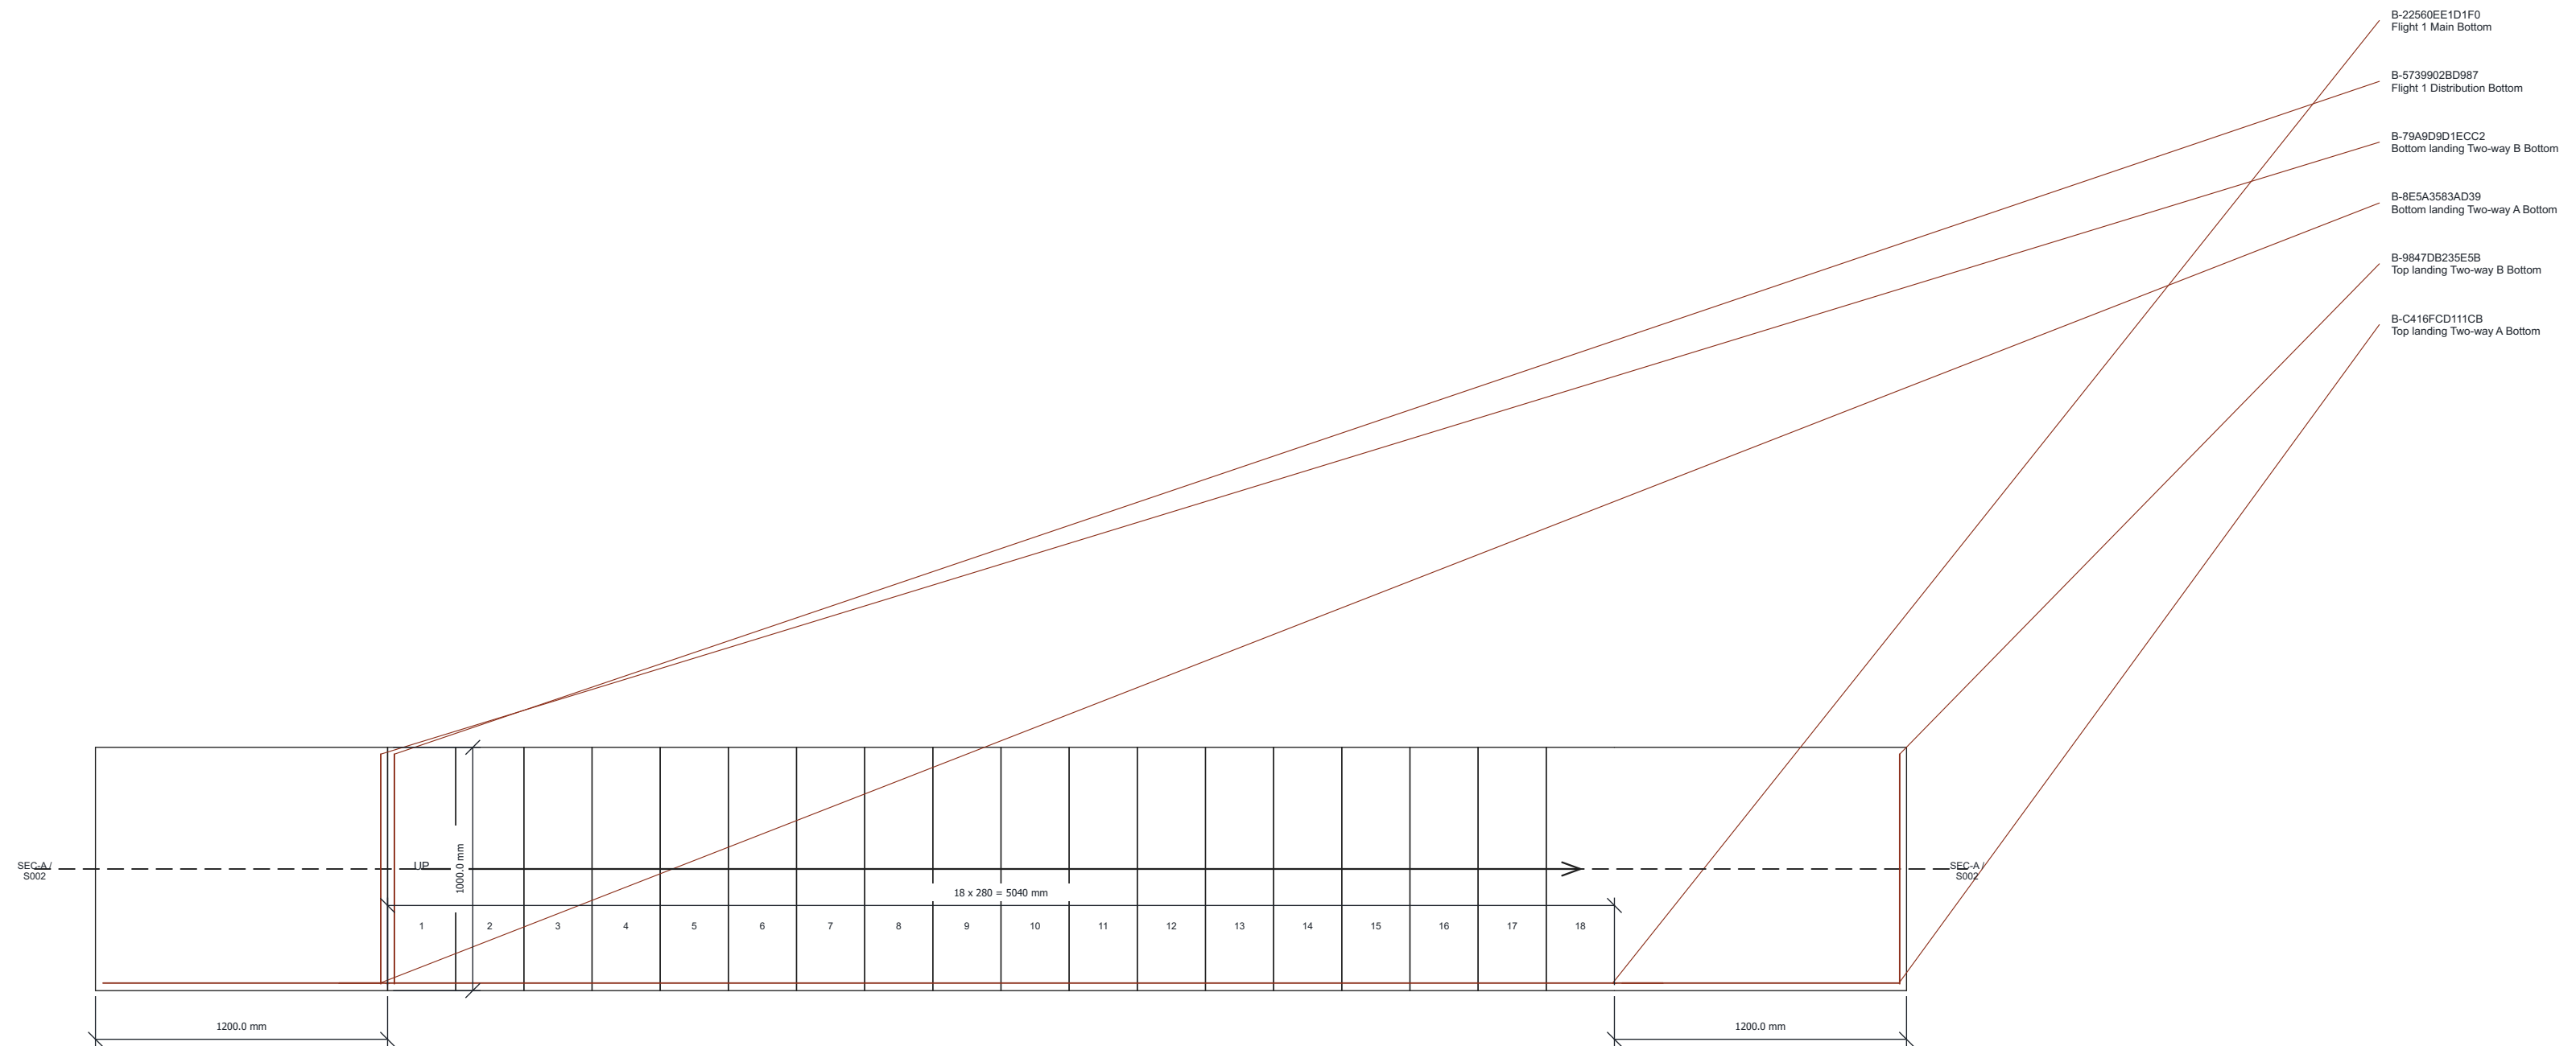


Rise $18 \times 166.667 = 3000$ mm | Dimensions from verified schema-2 concrete; heavy = cut, grey = projected context

Representative bars shown by role; full quantities / all Bar Marks are in BBS. Curved bars are sampled centrelines.

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S001	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

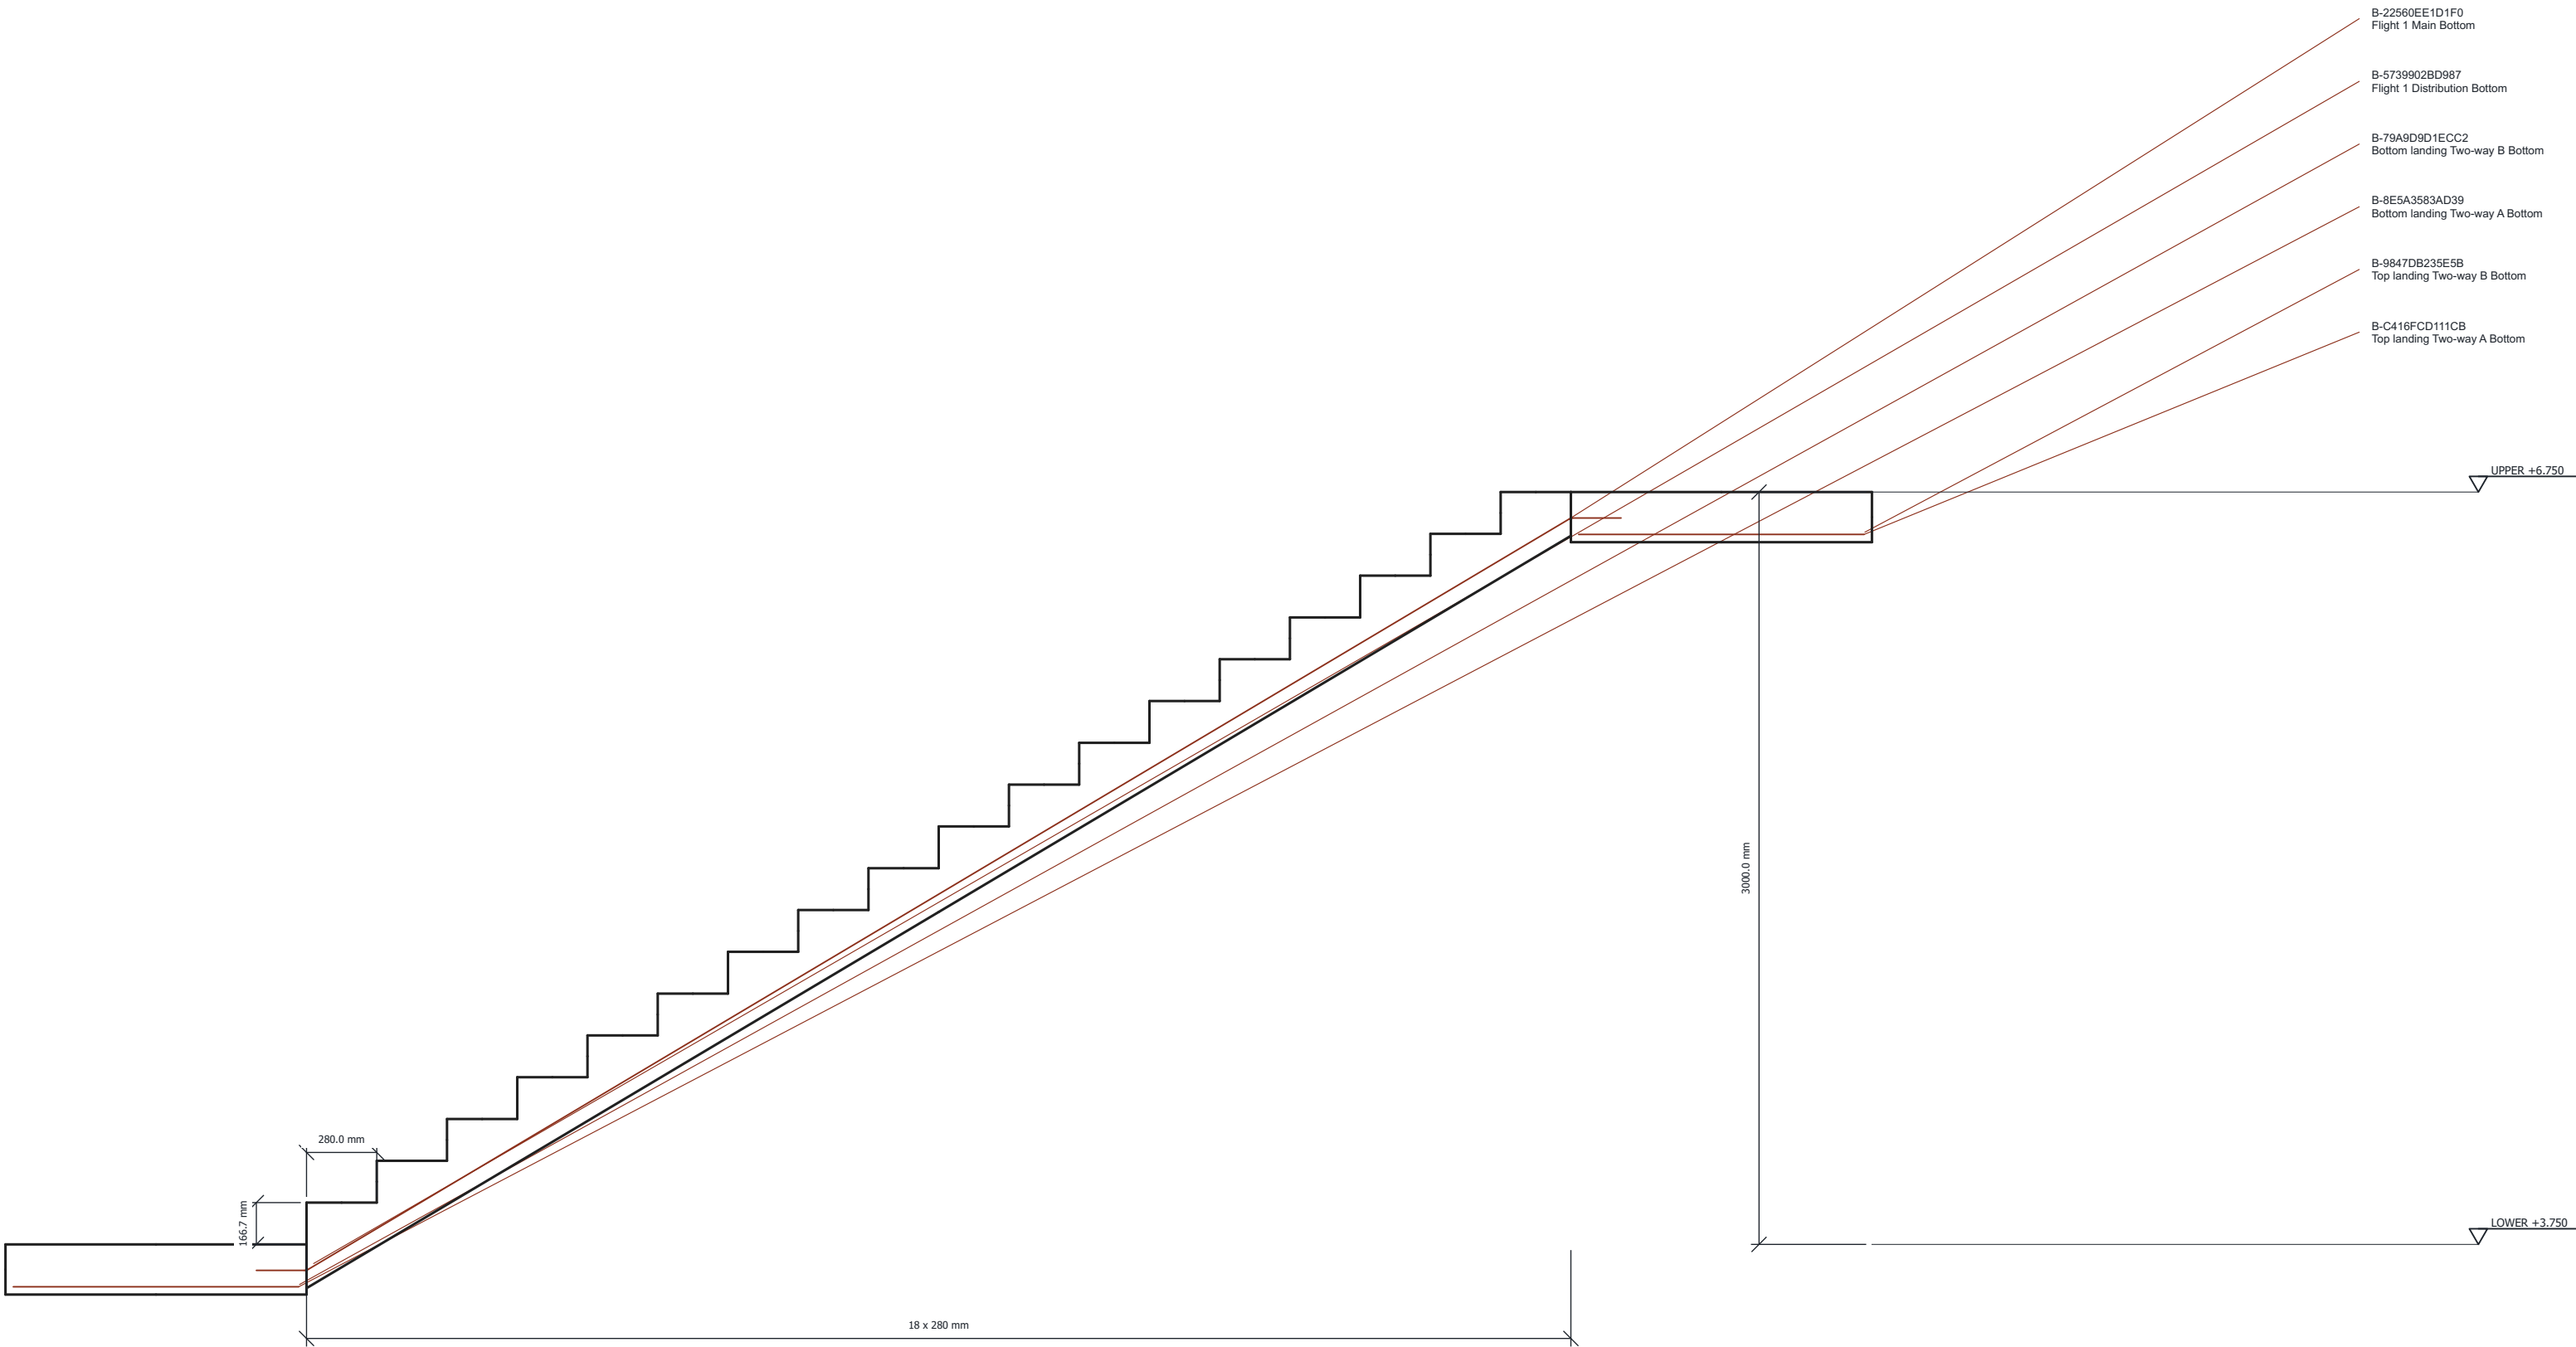

Rise 18 x 166.667 = 3000 mm | Dimensions from verified schema-2 concrete; heavy = cut, grey = projected context

Representative bars shown by role; full quantities / all Bar Marks are in BBS. Curved bars are sampled centrelines.

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S002	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage



BAR MARK B-22560EE1D1F0 | QTY 8 | Diameter 12 mm
ROLE: Flight 1 Main Bottom
Cut length 6264.491 mm | Inside bend radius 24 mm
Straight tangent lengths mm: 191.75, 5848.78, 191.75
Bend angles deg: 30.7627, 30.7627
Steel: Nominal diameter; grade unspecified
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S003	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage



BAR MARK B-5739902BD987 | QTY 26 | Diameter 6 mm
ROLE: Flight 1 Distribution Bottom
Cut length 944.000 mm | Inside bend radius 24 mm
Straight tangent lengths mm: 944.00
Bend angles deg:
Steel: Nominal diameter; grade unspecified
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S004	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage



BAR MARK B-79A9D9D1ECC2 | QTY 7 | Diameter 6 mm
ROLE: Bottom landing Two-way B Bottom
Cut length 944.000 mm | Inside bend radius 3 mm
Straight tangent lengths mm: 944.00
Bend angles deg:
Steel: Nominal diameter; grade unspecified
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S005	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage



BAR MARK B-8E5A3583AD39 | QTY 8 | Diameter 12 mm
ROLE: Bottom landing Two-way A Bottom
Cut length 1138.000 mm | Inside bend radius 6 mm
Straight tangent lengths mm: 1138.00
Bend angles deg:
Steel: Nominal diameter; grade unspecified
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S006	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage



BAR MARK B-9847DB235E5B | QTY 7 | Diameter 6 mm
ROLE: Top landing Two-way B Bottom
Cut length 944.000 mm | Inside bend radius 3 mm
Straight tangent lengths mm: 944.00
Bend angles deg:
Steel: Nominal diameter; grade unspecified
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 40 mm; print at 100%




PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S007	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

MODEL DETAIL | 1:25 | Dimensions mm / levels m | local stair view / actual cage

BAR MARK B-C416FCD111CB | QTY 8 | Diameter 12 mm
ROLE: Top landing Two-way A Bottom
Cut length 1138.000 mm | Inside bend radius 6 mm
Straight tangent lengths mm: 1138.00
Bend angles deg:
Steel: Nominal diameter; grade unspecified
BBS basis: Analytic tangent straights + centreline radius x bend angle

Scale check: 1 m = 40 mm; print at 100%



PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: S008	REV: 01
SCALE: 1:25 @ A2	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight

Thai BIM Stair synthetic | BBS01 | Bar bending schedule

BBS SCHEDULE | Table NTS | Actual-cage marks and analytic cut lengths

BAR MARK	ROLE / STEEL	D mm	QTY	CUT m	TOTAL m	MASS kg
B-22560EE1D1F0	Flight 1 Main Bottom Nominal diameter; grade unspecified	12	8	6.264	50.116	44.494
B-5739902BD987	Flight 1 Distribution Bottom Nominal diameter; grade unspecified	6	26	0.944	24.544	5.448
B-79A9D9D1ECC2	Bottom landing Two-way B Bottom Nominal diameter; grade unspecified	6	7	0.944	6.608	1.467
B-8E5A3583AD39	Bottom landing Two-way A Bottom Nominal diameter; grade unspecified	12	8	1.138	9.104	8.083
B-9847DB235E5B	Top landing Two-way B Bottom Nominal diameter; grade unspecified	6	7	0.944	6.608	1.467
B-C416FCD111CB	Top landing Two-way A Bottom Nominal diameter; grade unspecified	12	8	1.138	9.104	8.083

Counts and analytic cut lengths match actual-cage BBS Bar Marks; no procurement waste / laps inferred.

PROJECT: Thai BIM Stair synthetic	DATE: 2026-10-04
SHEET: BBS01	REV: 01
SCALE: NTS / table	AUTHOR:
STATUS: MODEL DETAIL / REVIEW	MODEL: Straight