





(1.00 mm) .0394"


FTM-125-02-L-DV



FTMH-116-02-L-DV-P



FTMH-111-02-F-DV-ES-A



# SMT MICRO TERMINAL STRIPS

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?FTMH](http://www.samtec.com?FTMH) or [www.samtec.com?FTM](http://www.samtec.com?FTM)

**Insulator Material:**  
Black Liquid Crystal Polymer

**Terminal Material:**  
Phosphor Bronze

**Current Rating (FTMH/CLM):**  
2.8 A per pin  
(2 pins powered)

**Operating Temp Range:**  
-55 °C to +125 °C

**Plating:**  
Sn or Au over  
50 μ" (1.27 μm) Ni  
**RoHS Compliant:**  
Yes

**Mates with:**  
CLM, MLE

## PROCESSING

**Lead-Free Solderable:**  
Yes

-DV Lead Coplanarity:  
(0.10 mm) .004" max  
-DH Lead Coplanarity:  
(0.10 mm) .004" max (05-25)  
(0.15 mm) .006" max (26-50)\*  
\*(.004" stencil solution  
may be available; contact  
IPG@samtec.com)

## RECOGNITIONS


For complete scope of  
recognitions see  
[www.samtec.com/quality](http://www.samtec.com/quality)



## ALSO AVAILABLE (MOQ Required)

- End shrouds with board locks
- Molded end shrouds for 05 through 08 positions
- Other platings

**Note:**  
Some sizes, styles and  
options are non-standard,  
non-returnable.

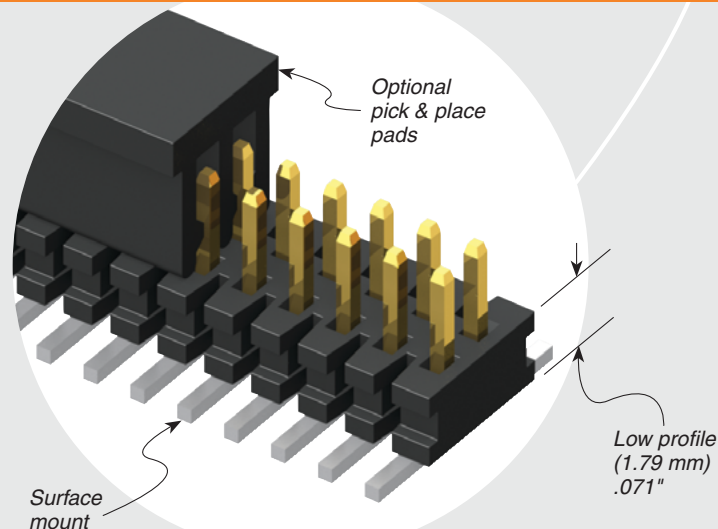

**TYPE STRIP**

**1**

**NO. PINS PER ROW**

**LEAD STYLE**

**PLATING OPTION**

**FTMH**  
= SMT Micro

**FTM**  
= Micro Low Profile

**FTMH**  
= 05 thru 50

**FTM**  
= 02 thru 50 (unshrouded)  
= 05 thru 46 (shrouded)

**-02**

= (1.91 mm) .075" Post  
(Mates with MLE)

**-03**




= (1.65 mm) .065" Post  
(Mates with CLM)

**-F**

= Gold flash on post,  
Matte Tin on tail


**-L**

= 10 μ" (0.25 μm)  
Gold on post, Matte Tin on tail




FTMH	
OPTION	B
-ES	(1.57) .062
-EC	(4.06) .160
-EP	(5.49) .216


FTMH	
LEAD STYLE	A
-02	(1.91) .075
-03	(1.65) .065




-ES OPTION




-EC OPTION




-EP OPTION




-DV OPTION



-DH OPTION



-A OPTION



-P OPTION


Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)


All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.


FTMH-122-02-F-DV-EC




FTMH-120-02-L-DV




FTMH-135-02-F-DH






FTMH-125-02-L-DV





FTMH-128-03-L-DV-EP



## FTMH, FTM SERIES

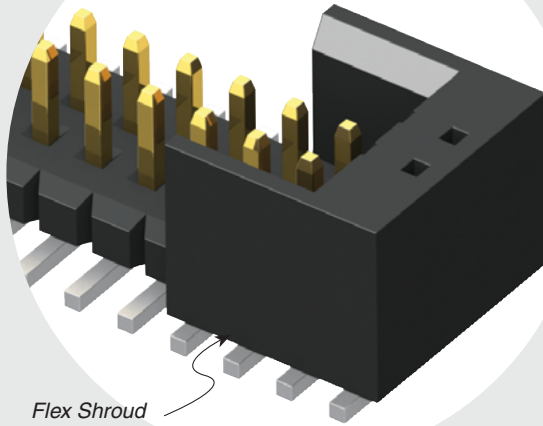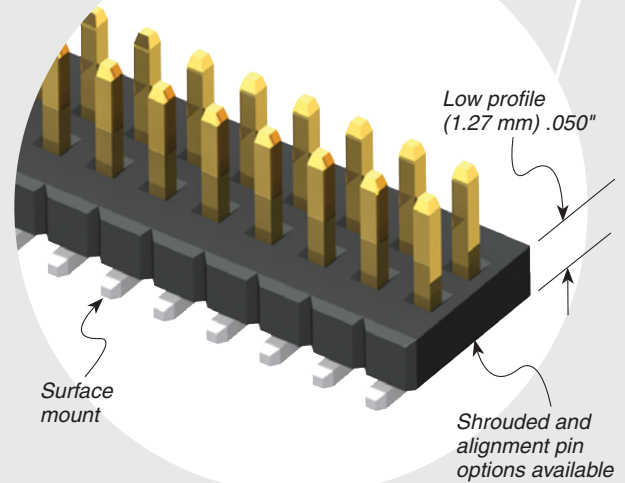Flex Shroud  
options availableLow profile  
(1.27 mm) .050"Surface  
mountShrouded and  
alignment pin  
options availableROW  
OPTION-DV  
= Dual Vertical-DH  
= Dual Horizontal  
(FTMH only)

FTM

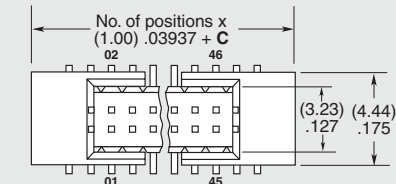

Shrouded options removed for clarity

## FLEX SHROUD OPTIONS


(FTMH-DV only with  
9 pins/row minimum)-ES  
= End Shroud-EC  
= End Shroud with Locking Clip  
(Manual placement required)-EP  
= End Shroud with Guide Post  
(Use only when mating with CLM)

FTM	
OPTION	C
-S	(7.00) .276
-SA	(4.00) .157


(FTM only)

-S  
= End Shroud  
(05 positions minimum).  
Molded or press-fit shroud at  
Samtec's discretion  
(See assembly print at  
[www.samtec.com?FTM](http://www.samtec.com?FTM)  
for dimensions)-SA  
= End Shroud with Alignment Pins  
(05 through 46 positions)


FTM	
LEAD STYLE	D
-02	(1.91) .075
-03	(1.65) .065




-DV OPTION



-SA OPTION



-S OPTION

OTHER  
OPTIONS-A  
= Alignment Pin  
(3 positions minimum)  
Metal or plastic at Samtec discretion  
(FTMH-DV only)-K  
= (2.50 mm) .098" DIA Polyimide  
Film Pick & Place Pad  
(FTMH-DH only)-P  
= Plastic Pick & Place Pad  
(-DV only)  
(6 positions minimum FTMH)  
(7 positions minimum FTM)-TR  
= Tape & Reel

-P OPTION

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.  
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[FTM-105-02-F-DV](#) [FTM-102-03-F-DV](#) [FTM-106-03-F-DV](#) [FTM-110-03-F-DV-P](#) [FTM-110-03-L-DV-S](#) [FTM-133-03-F-DV](#) [FTM-107-03-L-DV](#) [FTM-105-03-F-DV](#) [FTM-108-03-L-DV-S](#) [FTM-121-03-F-DV](#) [FTM-110-03-L-DV-P](#) [FTM-107-03-F-DV](#) [FTM-120-03-L-DV-P](#) [FTM-110-03-L-DV](#) [FTM-120-03-F-DV](#) [FTM-102-02-L-DV](#) [FTM-104-03-L-DV](#) [FTM-107-03-F-DV-P](#) [FTM-103-03-F-DV](#) [FTM-105-03-L-DV](#) [FTM-102-02-F-DV](#) [FTM-109-03-L-DV](#) [FTM-102-03-L-DV](#) [FTM-105-02-L-DV](#) [FTM-103-02-L-DV](#) [FTM-107-03-L-DV-S-P-TR](#) [FTM-126-03-L-DV](#) [FTM-110-02-F-DV](#) [FTM-122-03-L-DV](#) [FTM-107-03-L-DV-S](#) [FTM-103-02-F-DV](#) [FTM-110-02-L-DV](#) [FTM-111-03-F-DV-S](#) [FTM-104-02-L-DV](#) [FTM-132-03-F-DV](#) [FTM-121-03-L-DV](#) [FTM-112-03-L-DV](#) [FTM-117-03-F-DV](#) [FTM-107-03-F-DV-S](#) [FTM-115-03-L-DV](#) [FTM-110-03-F-DV](#) [FTM-108-03-L-DV](#) [FTM-105-03-L-DV-TR](#) [FTM-120-02-F-DV](#) [FTM-111-03-F-DV-P-TR](#) [FTM-111-03-F-DV-P](#) [FTM-112-02-L-DV-P-TR](#) [FTM-105-02-F-DV-TR](#) [FTM-107-03-F-DV-P-TR](#) [FTM-110-02-F-DV-P](#) [FTM-116-02-L-DV-P-TR](#) [FTM-107-03-L-DV-S-TR](#) [FTM-113-02-L-DV](#) [FTM-103-02-F-DV-TR](#) [FTM-108-03-F-DV-S-P-TR](#) [FTM-105-02-F-DV-S](#) [FTM-107-02-F-DV](#) [FTM-107-02-F-DV-P-TR](#) [FTM-111-02-L-DV-S](#) [FTM-111-03-L-DV](#) [FTM-111-03-L-DV-S](#) [FTM-113-02-F-DV-P-TR](#) [FTM-115-02-F-DV-S](#) [FTM-115-02-F-DV-SA](#) [FTM-117-02-F-DV](#) [FTM-120-03-L-DV](#) [FTM-124-02-F-DV-S](#) [FTM-124-02-L-DV-S](#) [FTM-126-02-F-DV](#) [FTM-136-02-L-DV](#) [FTM-142-02-L-DV](#) [FTM-150-03-L-DV-P](#) [FTM-120-03-F-DV-P](#) [FTM-122-02-L-DV-S](#) [FTM-127-02-F-DV-S](#) [FTM-130-03-L-DV-SA](#) [FTM-143-02-F-DV-S](#) [FTM-146-02-F-DV-S](#) [FTM-124-03-F-DV](#) [FTM-126-02-L-DV](#) [FTM-130-02-L-DV](#) [FTM-130-02-L-DV-SA](#) [FTM-130-03-F-DV-S-P-TR](#) [FTM-133-02-F-DV](#) [FTM-136-02-L-DV-S](#) [FTM-141-02-F-DV-SA](#) [FTM-144-02-L-DV-S](#) [FTM-150-02-F-DV-P](#) [FTM-130-03-L-DV-S-P-TR](#) [FTM-135-02-L-DV-P-TR](#) [FTM-135-03-F-DV](#) [FTM-140-02-F-DV-S](#) [FTM-141-02-F-DV-S](#) [FTM-146-02-L-DV-S](#) [FTM-145-02-L-DV](#) [FTM-145-02-L-DV-S](#) [FTM-115-02-L-DV-P-TR](#) [FTM-115-02-L-DV-TR](#) [FTM-116-02-F-DV-S](#) [FTM-118-02-L-DV](#)