




Product Data Sheet

SMD 2835 224 LEDs

HB-ST2Q224V24-Cxx-10MM

Constant Voltage Static LED Strip

Optional:

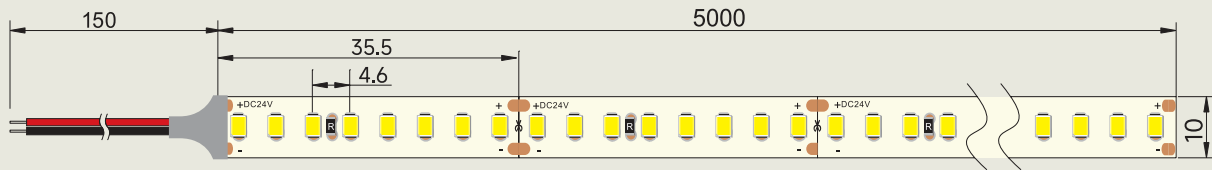

Features


- High lumen LED,
- Thick copper double-sided PCB;
- Classical constant voltage technology;
- High CRI>90 (95 is available);
- Wide range CCT and wattage;
- Dimmable;
- Easy to cut in 35.5mm segments;

SPECIFICATIONS


PARAMETER	VALUE
INPUT VOLTAGE	DC24V
Ra	>90%
Lm/W @ 4000K	134
Beam Angle	120°
LED Chips / m	224 pcs
Working Temp.	-25°C ~ 45°C
Cuttable Length	35.5 mm
PCB Width	10 mm

CCT (K)	Power (W/m)	Lumen (Lm/m)	Max. run length (m)
2700	24	2716	5
3000	24	2745	5
4000	24	2925	5
6500	24	2899	5

Light Distribution Curve

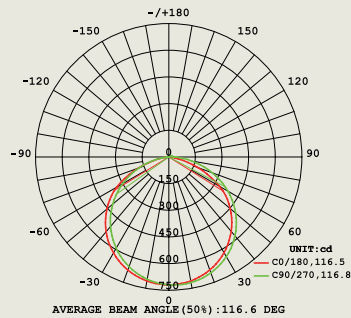

Effective Average Illuminance



FEATURES

- LED Type: 2835
- Color Consistency: SDCM ≤ 3
- Ingress Protection: IP20
- Optional: IP54 / IP65 / IP67 / IP68



WARNING

LED strips are low-voltage devices and require a proper power supply. Do not connect the LED strip directly to AC110V, as this will damage the LEDs and cause the strip to burn out.

Clean up the installation surface, it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.