

How Photos Become 3D

Week 7 — Tuesday Lecture

Today


- Where 3D comes from: finding and matching points
- Where the cameras were
- From sparse to dense to mesh
- The products: orthophoto, DSM, DTM
- What the photo's metadata carries
- The software, briefly

Two photos of the same corner of a building.


What does the computer actually know?

Two photos, one pole, and where height comes from

The same point sits in a different place in each photo. That difference is what the software turns into 3D.

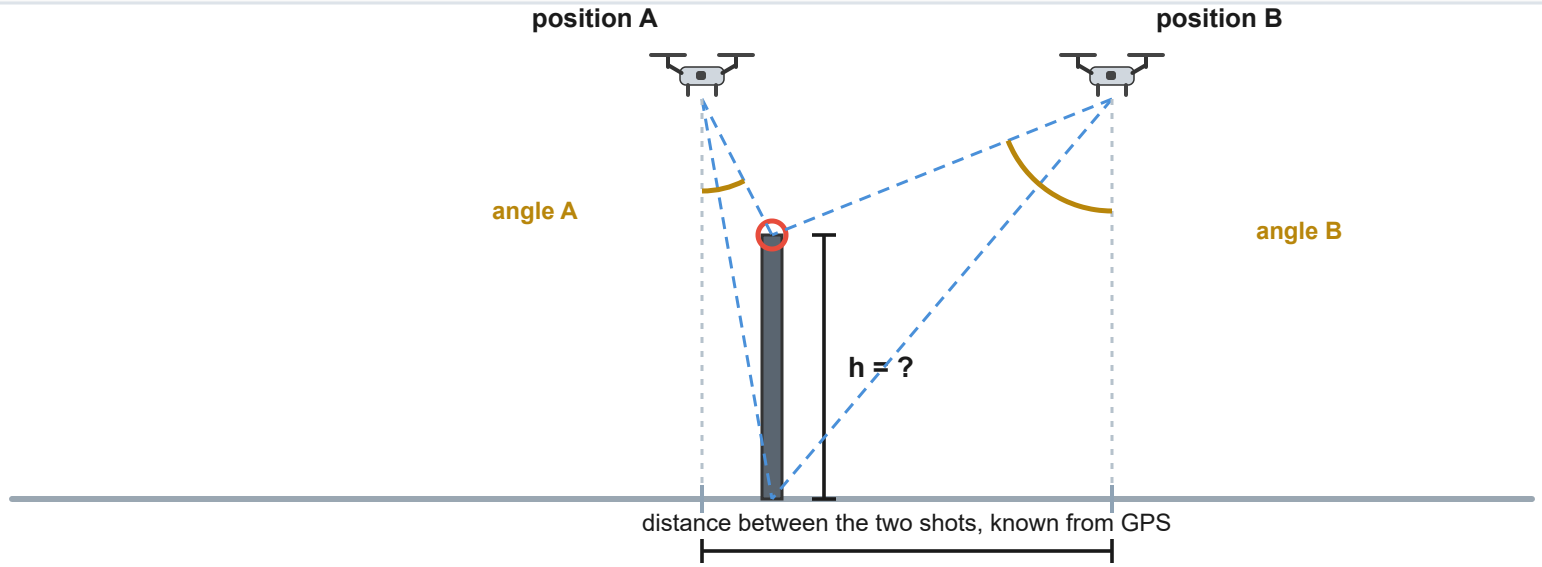

Two known camera positions, two measured angles, one unknown height. That is a triangle, and trigonometry solves it.

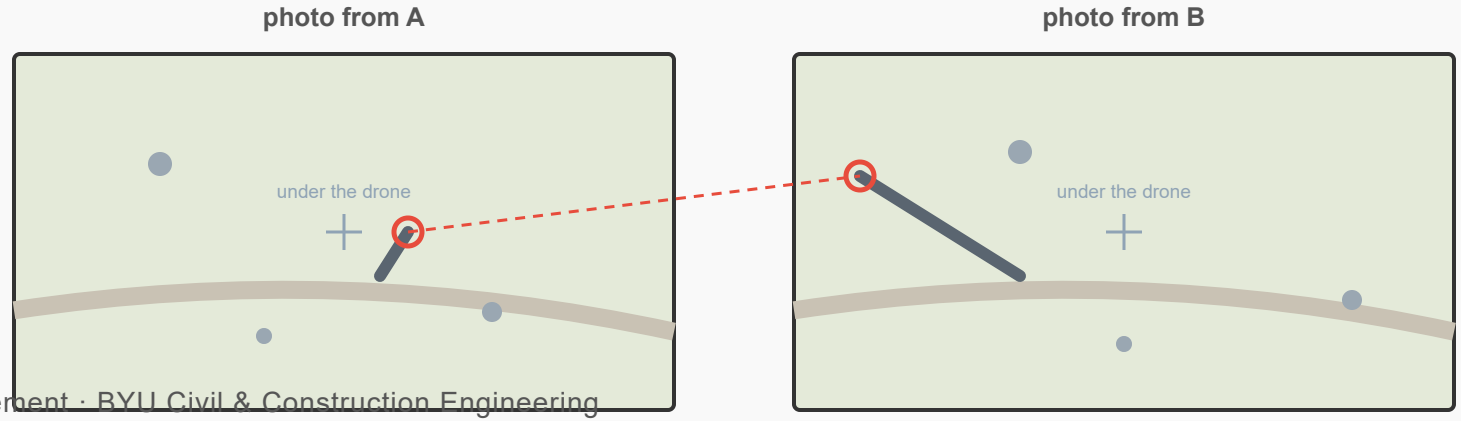

pole nearly underneath, so it looks short

pole off to the side, so it looks long

The triangle idea


- Two photos of the same thing, taken from different places
- Two **known** camera positions
- Two **measured** angles
- One **unknown** height — solve the triangle

Why overlap is the number that matters

Overlap exists so the same point lands in several photos. Without that, there is nothing to triangulate.

Forward overlap, 80%

between one photo and the next

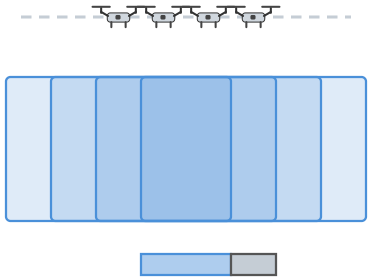


80% of each photo repeats the one before

only the grey 20% is new ground

so every point on the ground is caught by
5 to 9 different photos.

Side overlap, 70%


between one flight line and the next

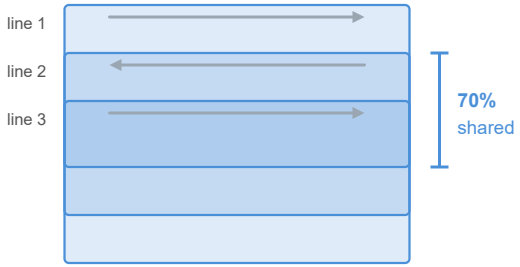

70% of each strip is photographed twice.

Too little sidelap leaves gaps between lines
that no software can fill in afterwards.


What you are trading

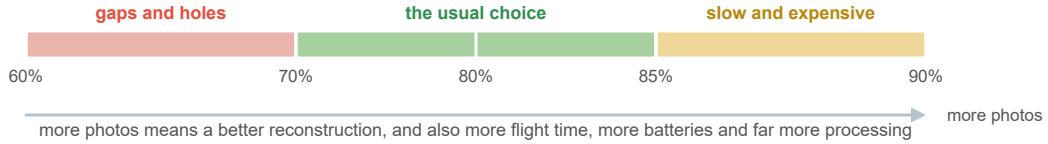

Overlap is what puts every ground point into five to nine different photos.

Where the software finds its points

A tie point has to be findable again in the next photo. Corners and texture are; blank and repeating surfaces are not.

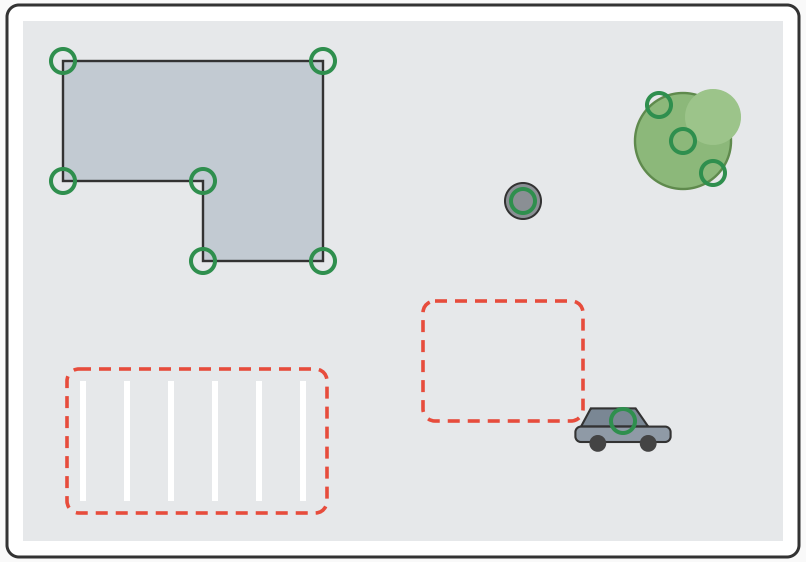

Keypoints: corners, edges that end, texture

A building corner, a manhole lid, the edge of a car, the texture of a tree canopy. Each one looks like itself and like nothing nearby.

Blank asphalt: nothing to grab

Every pixel looks like every other pixel. The software finds no point here, and the model will be smooth and vague across it.

Identical stripes: the wrong thing to grab

Every stripe looks like every other stripe, so a point found here is matched to the wrong stripe in the next photo. Worse than blank.

Thousands of these per photo, found automatically. You never pick them. You fly so that they exist.

Overcast light helps: no hard shadows that move between photos and look like features.

The software looks for corners and texture. Blank asphalt gives it nothing; a row of identical stripes gives it the wrong thing.


What makes a good tie point

Surface	Result
Unique — manhole, rock, corner, crack	Matched correctly
Blank — asphalt, snow, water, glass	Holes you can see
Repeating — stall lines, grass, row crops	Matched confidently and **wrongly**

Overcast is good: flat light looks the same in every photo, and no moving shadows to fool the matcher.

Matching: a fingerprint for every point

The pixels around a keypoint are summarised into a small pattern. Patterns that agree across two photos are a match.

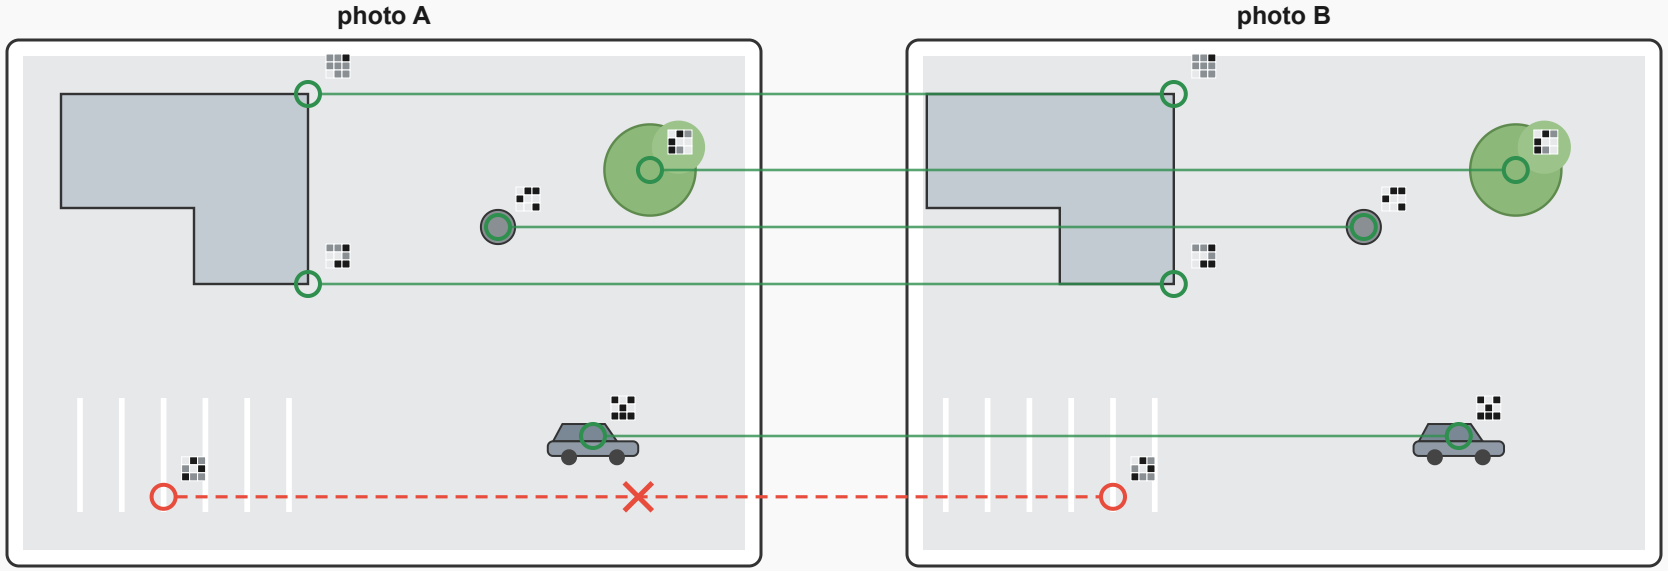

Green: fingerprints agree, geometry agrees

The same corner, the same manhole, the same car, shifted the way everything else shifted between the two photos. Kept as tie points.

Red: fingerprints agree, geometry does not

Two identical stripes produce identical fingerprints. The match points the wrong way compared with every other match, so it is thrown out (RANSAC).

A fingerprint is built so that it survives a change of scale and rotation: the next photo was taken from somewhere else.

Each point gets a fingerprint of the pixels around it. Fingerprints that agree are matched; a match that disagrees with all the others is thrown out.

SIFT, in plain words

- Finds **blobs and corners** that still stand out at several zoom levels
- Gives each one an **orientation**
- Summarises the pixels around it as **128 numbers** — the fingerprint
- Same corner, different photo: nearly the same numbers
- So a change of scale or rotation does not break the match

Matching, then cleaning up


- Compare fingerprints; keep a match only if the best is **clearly better than the second best** — the ratio test
- **RANSAC**: guess a camera geometry from a few matches, count who agrees, repeat
- Matches that never agree with anything are **thrown out**
- Once the geometry is known, a partner point lies on **one line** in the other photo

A parking lot of identical stripes.

Why is that worse than a blank field? Which test catches it — the ratio test, or RANSAC?


Where was the camera? Where is the point? Solved together

Every matched point sends one ray from every photo that saw it. Move cameras and points until the rays agree.

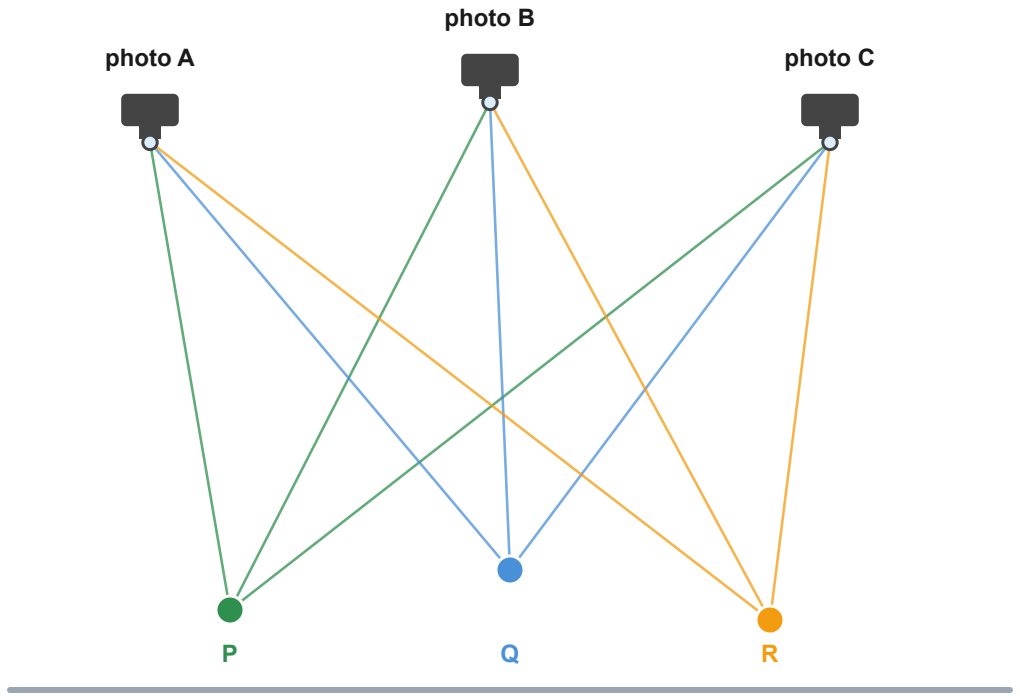

three cameras, three points, nine rays: one solve

A ray that misses

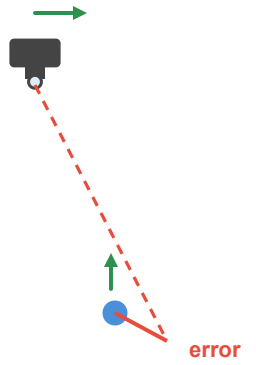

nudge the camera and the point until the miss is as small as it can be for every ray at once

This is bundle adjustment.

Bentley: aerotriangulation.

The GPS tag on each photo is the first guess and sets the scale. The photos themselves do the rest.

Cameras and points are solved together: nudge both until every ray through a matched point agrees. Bentley calls this aerotriangulation.

Shape is not size


- GPS tags give the software a **first guess** and the **scale**
- With no known positions: right shape, wrong size, wrong place
- A building can come out perfectly proportioned and twice life size
- A reference, ground control, or **RTK** supplies the missing scale and position

Think like the software

A rocky canyon and a snowfield, same day. Which one worries you? What do you change about the flight?

From matched points to a model


The same building at each stage. Only the amount of detail changes.



Sparse cloud

the tie points themselves


hundreds of points



Dense cloud

a point for almost every pixel


millions of points



Mesh

a surface stretched over the points

triangles, not points



Textured model

the photos draped back on


what you show a client


Every stage after the first is derived. Get the tie points wrong and nothing downstream can recover.

The same building at four stages: sparse, dense, mesh, textured.

From thousands of points to millions

Once the cameras are known, every pixel can be matched, not just the distinctive ones, because the search is one line long.

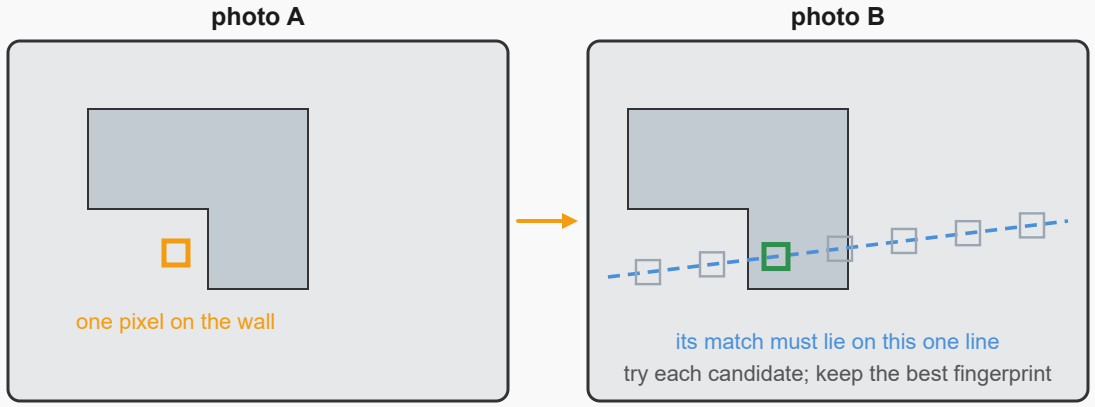

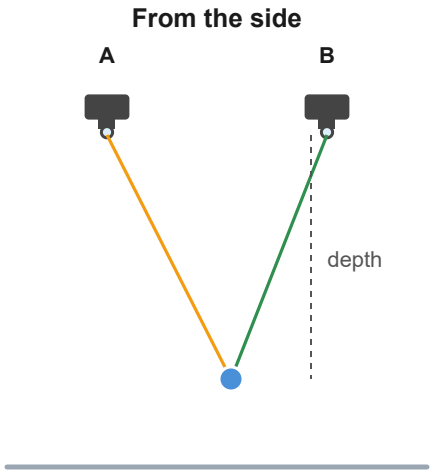

Repeat for every pixel of every photo

Thousands of tie points become millions of surface points. Blank asphalt still gives nothing: no fingerprint, no match.

This is the slow step. It is why a reconstruction runs for hours while aerotriangulation took minutes.

Multi-view stereo, in the appendix. Bentley: Reconstruction.

For one pixel in photo A, the match in photo B lies on one known line. Find it, read the depth, repeat for every pixel.

Sparse to dense

- Thousands of points become **millions**
- Once cameras are known, the search is along one line, not the whole image
- Needs **texture**, **overlap**, and **sharp** photos

Points become triangles


A cloud is not a surface. Joining neighbouring points into triangles makes one, and the one rule that matters is how far apart two points may be and still be joined.

Dense points



a side slice through the cloud


Joined into triangles

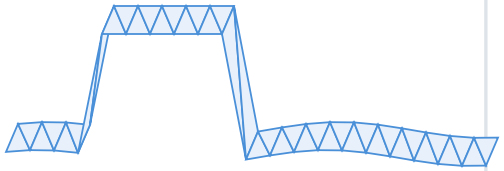

every point joined to its neighbours

The thin pole problem

a pole or a wire has points far from the ground points beside it; join them and you get a tent

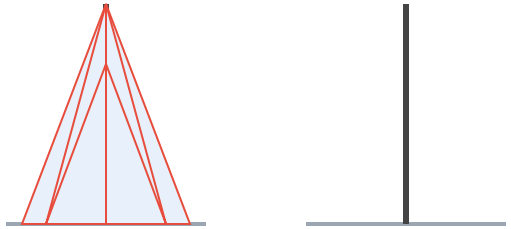

A webbed mesh is not a bad flight. It is a tolerance to change in the software.

Points become triangles. A thin pole gets webbed to the ground unless the tolerance is tightened.


Mesh and textured model

- **Mesh:** a skin of triangles over the points; thin things like railings and wires often vanish
- **Texture:** each triangle colored from the photo that saw it best — recognizable, not more accurate
- Mesh looks webbed? **Tighten the tolerance.** More honest gaps, fewer invented surfaces

From the surface to the deliverables

The orthophoto and the DSM are the same surface, read two different ways.


The surface



meshed from the dense cloud,
with the photos draped over it


Orthophoto

every pixel put where it truly belongs,
at one constant scale across the whole image



Surface model (DSM)

the height of that surface, sampled onto
a regular grid, one height per cell




Strip the buildings and vegetation out of that grid and the same surface becomes a DTM.

The orthophoto and the DSM are the same surface read two ways: a picture, and a grid of heights.

A DEM is the surface sampled on a grid

Lay a grid over the mesh and ask one question in every cell: how high is the surface here? The answer is one number per cell.

From the side

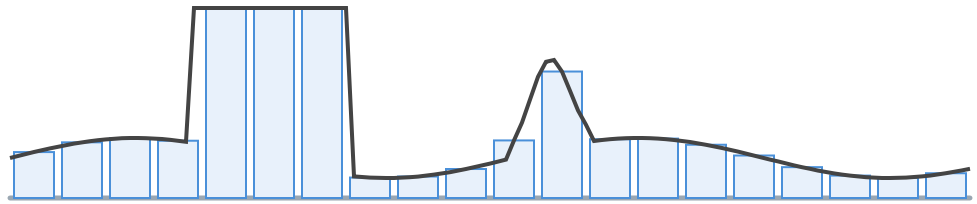

the mesh (black) and the height recorded in each cell (blue)

From above: the grid of heights

21	24	27	27	28	27	25	24
24	27	26	27	26	26	24	20
27	95	95	95	27	24	21	18
26	95	95	95	24	20	18	16
26	95	95	95	21	19	18	16
27	26	24	21	18	18	62	17
27	24	21	18	16	15	16	16
25	21	20	18	14	15	17	18

one height per cell, the cell is the GSD

Keep the building and the tree and it is a DSM. Strip them to bare ground and it is a DTM.


Sample the surface on a grid and every cell gets a height. Keep the trees and cars for a DSM; strip them for a DTM.

What the model includes

Same flight, same site, two different surfaces. Which one you need depends on the question.

Surface model (DSM)


everything the drone saw

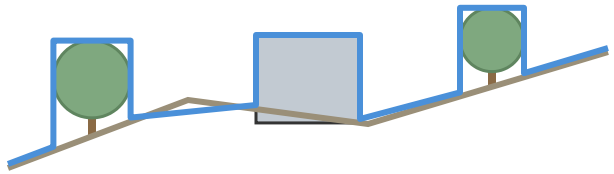

use it to check clearances and heights

Terrain model (DTM)

bare ground, trees and buildings stripped out

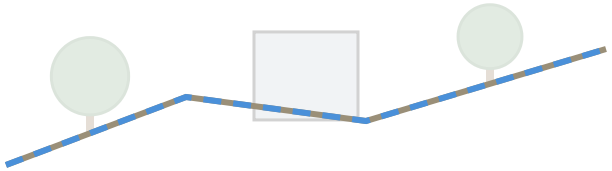

use it for earthwork, drainage and grading


Digital Elevation Model (DEM) is the umbrella term you will also hear for both of these.

DSM keeps the trees and buildings. DTM strips them out — only one is right for earthwork.

Why a photo is not a map, and how the mesh fixes it


A camera sees the top of a building further from the centre than its base. Projecting every photo onto the mesh and looking straight down removes that lean.

The photo

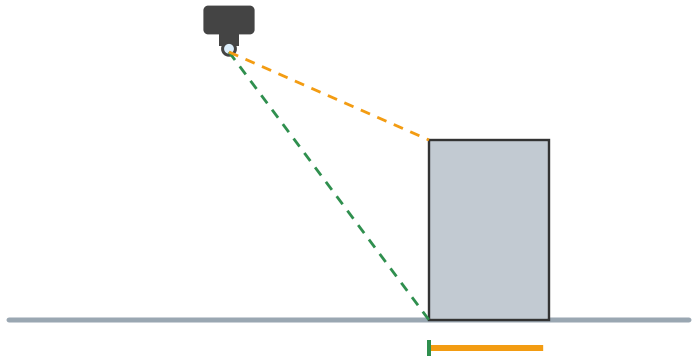

buildings lean away from the centre of every photo
and two photos disagree about where the roof is

The orthophoto

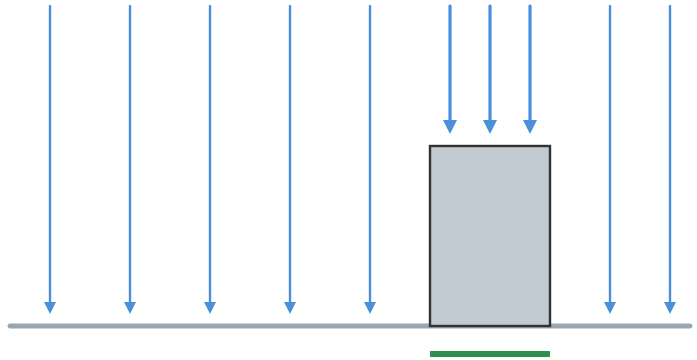

every point viewed from straight above, using the
mesh to know where each pixel sits on the ground

Orthorectification. Stitch the straightened photos together and the result is the orthomosaic: a picture you can measure on.

Lean that survives into the orthomosaic means the mesh was wrong there, usually from too little overlap.

A photo leans every building away from the camera. Drape each photo on the mesh and look straight down at every point, and the lean is gone.

Which product answers which question?

"How much gravel is in that pile?" and "Where does the curb run?"

Metadata: data about data

- The **can of soup**: the soup is the data, the label is the metadata
- A photo of a site is not much use without its context
- Drones depend on it: **where, when, which way**
- Bad metadata can make good data useless

What EXIF carries

- **Position:** latitude and longitude
- **Altitude:** sets the scale of the image
- **Time:** the timestamp, for change over time
- **Camera and lens settings:** ISO, shutter speed
- **Orientation:** heading (yaw) and gimbal pitch, nadir or oblique


Stored inside the image file. Right-click, Properties, Details to see it.

Metadata and privacy

- Exact GPS coordinates are in every photo
- Social media strips them on upload to protect you
- For engineering we **must keep** them intact
- Check the drone's clock and GPS lock before you fly

Six stages, four buttons

What structure from motion does, and what the software calls each part of it.

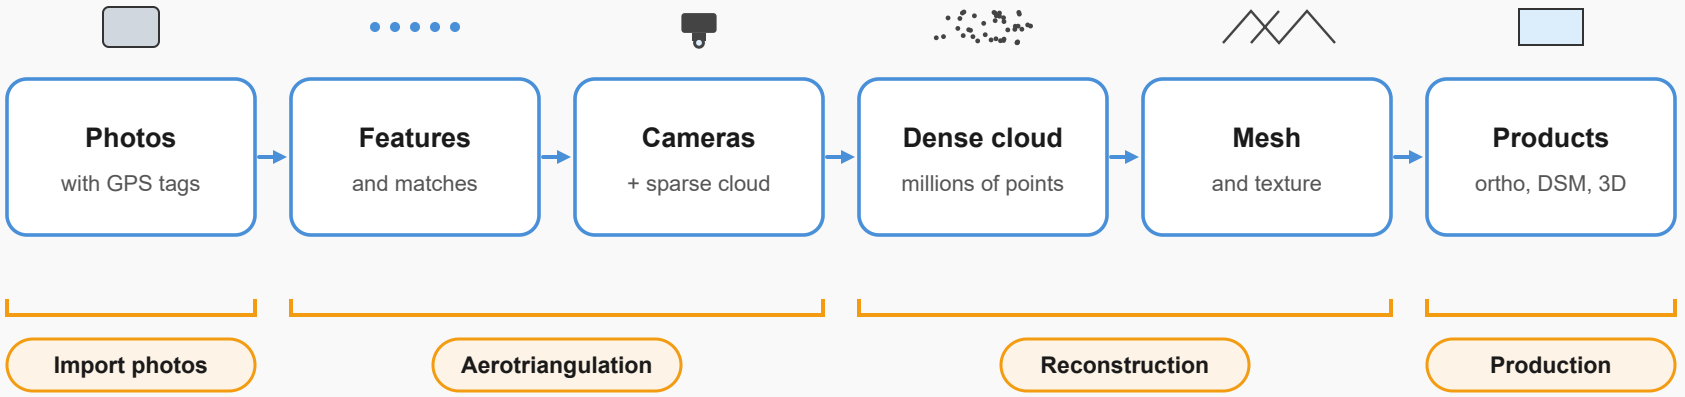

Bentley iTwin Capture Modeler, the four steps you click

The software does the arithmetic. The photos decide whether the arithmetic has anything to work with.

Six stages, four buttons. Every product on the right is built from the photos on the left.

Bentley iTwin Capture Modeler

1. **New Project**
2. **Import Photos**
3. **Aerotriangulation**
4. **Reconstruction & Production**

Three outputs: **Orthophoto/DSM** (TIFF), **3D mesh** (3MX or OBJ), **point cloud** (LAS).

Create your Bentley account

Before the processing lab. Learning Suite has the link.

- Lab deck: Bentley iTwin Capture Modeler
- Bentley iTwin

What to do Thursday

- **Rock Canyon flight day:** Rock Canyon Park Flight
- Fly the plan from the Week 6 lab
- Bring back the photos — they become next week's model
- Create your **Bentley account** before the processing lab