



BILL OF MATERIAL								
LINE #	QTY	PC MARK	DESCRIPTION	LENGTH		REMARKS	WEIGHT TOTAL	ADVANCE MILL #
	ONE	F-08.02LP1	LEVELING PLATE				9	
	1	F-08.02LP1	PL 1/4x7	1	6	A36	9	
	ONE	F-08.02LP2	LEVELING PLATE				6	
	1	F-08.02LP2	PL 1/4x6 1/2	1	2	A36	6	
	ONE	F-08.02LP3	LEVELING PLATE				8	
	1	F-08.02LP3	PL 1/4x8	1	2	A36	8	
	ONE	F-08.02LP4	LEVELING PLATE				8	
	1	F-08.02LP4	PL 1/4x6 1/2	1	6	A36	8	
	ONE	F-08.02M1	HSS				54	
	1	F-08.02M1	HSS 7/8x1 1/2	1	1 1/2	A500C	47	
	2	p3667	PL 1/4x7	0	7	A36	7	
	ONE	F-08.02M2	SHIM PLATE				13	
	1	F-08.02M2	PL 1/2x7	1	1 1/2	A36	13	
	ONE	F-08.02M3	PLATE				37	
	1	F-08.02M3	PL 3/4x6	1	3	A36	19	
	2	p3659	PL 3/4x6	0	7	A36	18	
	8	F-08.02M4	THREADED ROD				12	
	8	F-08.02M4	1" Ø FULLY THREADED ROD w/ HILTI HIT-HY 200 V3 ADHESIVE	0	6 1/2	F1554 GR. 55	12	
	8		1 NUT			HHNT A563		
	8		1 WASHER			HD F436		
	4	F-08.02M5	THREADED ROD				5	
	4	F-08.02M5	3/4" Ø THREADED ROD w/ HILTI HY-200 ADHESIVE	0	9	F1554 GR. 55	5	
	4		3/4 NUT			HHNT A563		
	4		3/4 WASHER			HD F436		
	24	F-08.02M6	THREADED ROD				166	
	24	F-08.02M6	1" Ø THREADED ROD	2	7	F1554 GR. 55	166	
	48		1 NUT			HHNT A563		
	48		1 WASHER			HD F436		
	16	F-08.02M7	THREADED ROD				30	
	16	F-08.02M7	1" Ø THREADED ROD w/ HILTI HIT-HY 200 V3 ADHESIVE	0	8 1/2	F1554 GR. 55	30	
	16		1 NUT			HHNT A563		
	16		1 WASHER			HD F436		
	2	F-08.02M8	THREADED ROD				1	
	2	F-08.02M8	1/2" Ø THREADED ROD w/HILTI HY 200 V3 ADHESIVE	0	6	F1554 GR. 55	1	
	2		1/2 NUT			HHNT A563		
	ONE	F-08.02M9	HSS				208	
	1	F-08.02M9	HSS 5 1/2x5 1/2x5 1/16	9	7 1/2	A500C	204	
	2	p407	PL 1/4x5 1/2	0	5 1/2	A36	4	


Total weight : 557

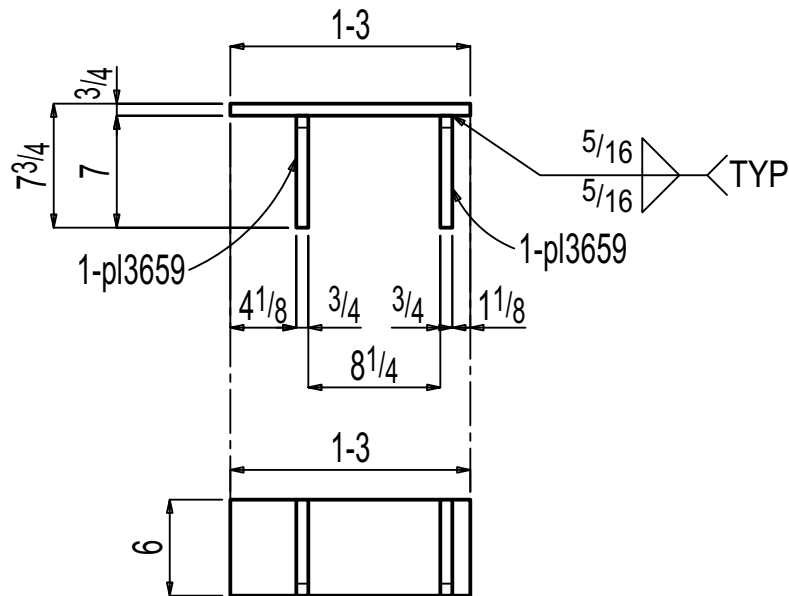


ONE PLATE F-08.02M3

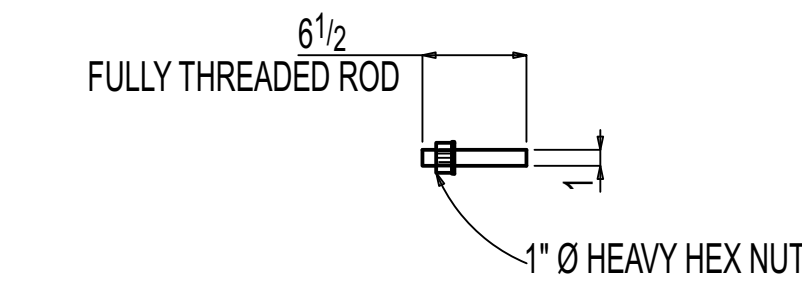


8 THREADED RODS F-08.02M4

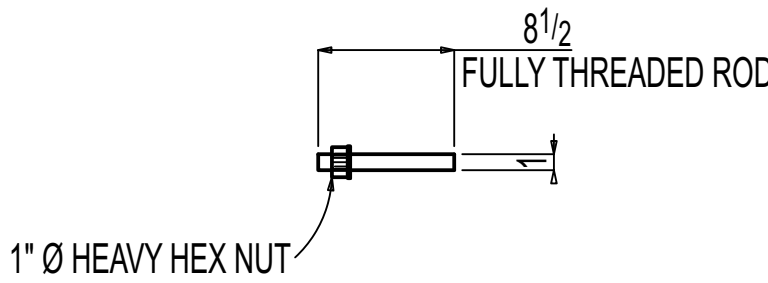


16 THREADED RODS F-08.02M7

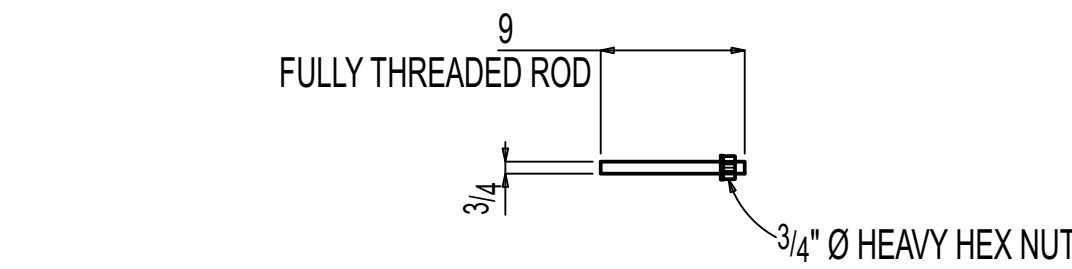


4 THREADED RODS F-08.02M5

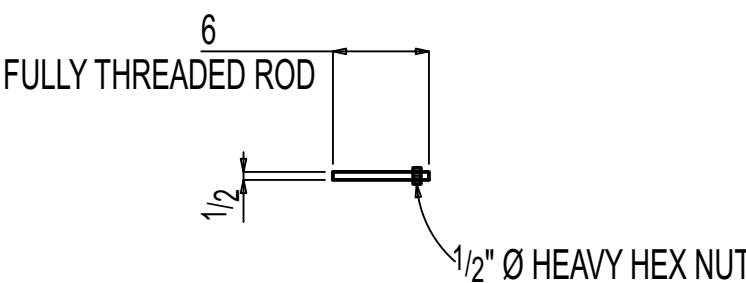


2 THREADED RODS F-08.02M8

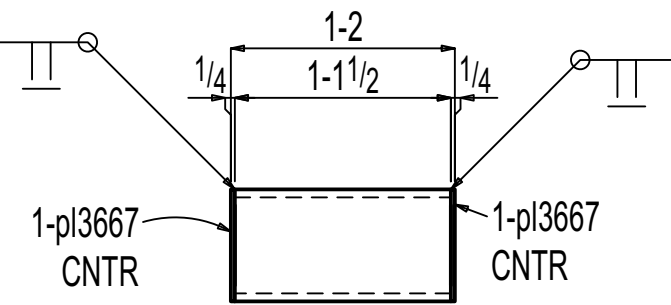


ONE HSS F-08.02M1

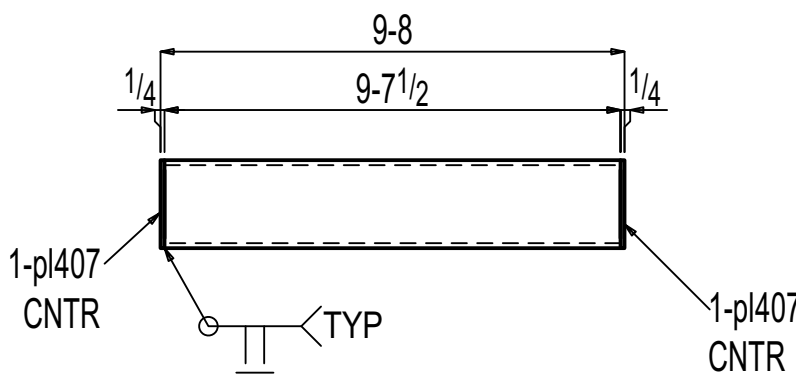


ONE HSS F-08.02M9

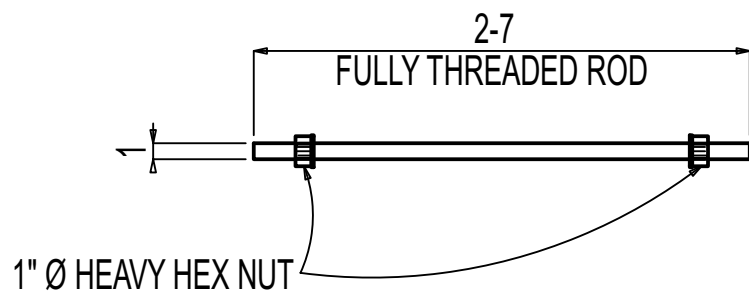

24 THREADED RODS F-08.02M6

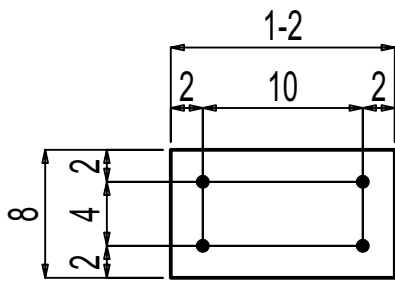

ONE LEVELING PLATE F-08.02LP3

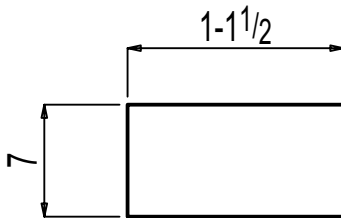

ONE SHIM PLATE F-08.02M2

PAINT :NO PAINT
PREPARATION :SSPC-SP3

General Notes			
*Structural steel shall conform to ASTM-A992.			
*Structural SQR/RND,tubing conform to ASTM A500 Grade C			
*Pipe shall conform to ASTM A53, Grade B.			
*Channels, Angles and plates shall conform to A36.			
*All bolts shall be 3/4" High strength in accordance with ASTM A325 (UNO)			
*Welding Electrodes for Carbon steel :E70xx			
5	0	For Fabrication	11-03-2025
4	D	For Re-Approval	10-24-2025
3	C	For Re-Approval	09-19-2025
2	B	For Re-Approval	06-23-2025
1	A	For Approval	02-25-2025
# of Copies	Revision/ Issue	Destination	Date

IRON FABRICATION SERVICES, LLC.

3029 M. Street, NW, Suite 202
Washington, DC 20007
Tel: 202-800-5599
Fax: 202-478-0303

Project Name and Address
MARYLAND AVENUE

Location: **1250 MARYLAND AVENUE SW
WASHINGTON, DC 20024**

Contractor:
BALFOUR BEATTY

Approved for Fabrication by: Signature

Contract # **224009** Drawing # **F-08.02**

Contract Item: **MISC DETAIL**

Ref:
SOW - 08: E-08.00 - E-08.04

Date **01/ 23/ 2025** Drawing Title: **MISCELLANEOUS DETAIL**
Scale **VARIES**