EHAp-15μm High Barrier Type

Description

EHAp is the high barrier nylon film co-extruded from PA6 chips and EVOH chips with linear motor simultaneous stretching technology.

Composition

EHAp

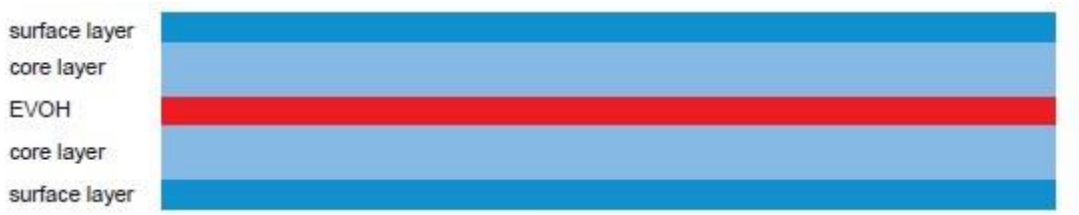

Feature

- Superior oxygen barrier to extend the shelf life
- Outstanding aroma barrier
- Environmentally-friendly and sustainable
- Excellent dimensional stability for printing
- High level in each mechanical property

Application

Suitable for common pasteurized packaging demanding high quality barrier and superb aroma saving function, such as pet food, fruity jelly ,hot-filled sauce, cheese, daily chemical products, balloon and packagings adopting radiation sterilization and other sterilizing ways. Recommended for boiling packaging below 85℃ or hot filling not higher than 105℃.

Recommended Structure

EHAp//PE、EHAp//CPP、BOPET//EHAp//PE、BOPET//EHAp//CPP

PET//EHAp//PE

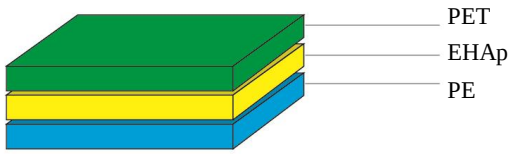

Supamid 矢量膜™

EHAp-15μm High Barrier Type

Technical data sheet

Typical Properties		Test Method	Units	Typical Values
Thickness		_	μm	15
Average Thickness Tolerance （%）		ISO4593	%	±3.0
Tensile strength	MD	ISO527	MPa	220
	TD			230
Elongation at break	MD	ISO527	%	110
	TD			110
Tensile modulus	MD	ISO527	MPa	1800
	TD			1700
Tear strength	MD	ISO6383.2	mN	100
	TD			90
puncture resistance		Radius 0.5mm	N	10
Heat Shrinkage	MD	ISO11501 （160℃,5min）	%	≤2
	TD			≤2
*Coefficient of friction dynamic/static	Untreated side/Untreated side	ISO8295	_	0.35/0.5
Surface Tension(Treated one side)	Treated side	ISO8296	mN/m	56
	Untreated side			39
Surface Tension(Treated both sides)	Treated inside	ISO8296	mN/m	54
	Treated outside			50
Haze		ASTM D1003	%	4
Gloss（angle 45°）		ASTM D 2457	%	100-110
Oxygen Transmission Rate		ASTM F 1927 (23℃,50%RH)	cc/(㎡.day.atm)	＜2
Water Vapor Transmission Rate		ASTM F1249 (38℃,90%RH)	g/(㎡.day)	260

Reel length (m)	Standard 6000, 12000 and 24000
Reel width (mm)	300-2300
Core diameter (inches)	3 and 6

Notice:

1. Test Condition: 23℃-50%RH unless describing the condition in Test Method.
2. Marked "*"project in Typical Properties is only applicable to single corona products.
3. The values presented in this data sheet are typical values and are not to be interpreted as product specifications.