

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.9, AD-2.11, AD-2.14, AD-2.16, AD-2.19, AD-2.20, AD-2.21, AD-2.22, AD-2.23

RPVC AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPVC - CALBAYOG PRINCIPAL AIRPORT (Class 2)

RPVC AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	120437.1364N 1243252.0662E.
2	Direction and distance from (city)	6.5KM N.
3	Elevation/Reference temperature	3.50M AMSL.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	1.3°W (2014) / 2.8' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Calbayog Airport, Trinidad, Calbayog 6710 Western Samar Tel. No.: (055) 209-9179.
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPVC AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2100 - 0500.
6	MET Briefing Office	Nil.
7	ATS	MON - FRI: 0000 - 0900.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	Nil.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2100 - 0500.

RPVC AD 2.5 PASSENGER FACILITIES

1	Hotels	In the city.
2	Restaurants	In the city.
3	Transportation	In the city.
4	Medical facilities	In the city.
5	Bank and Post Office	In the city.
6	Tourist Office	In the city.
7	Remarks	Nil.

RPVC AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT VI.
2	Rescue equipment	Two (2) fire trucks (SIDES VMA 28 & Oshkosh Striker 4x4).
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPVC AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: Nil.
2	Taxiway width, surface and strength	Width: 18M. Surface: CONC. Strength: Nil.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPVC AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
17/35 APCH	Trees, antenna & coconut groves	Nil	Nil	Nil	Nil
Nil	Nil	Nil	Terrain 565FT	120502.9960N 1243117.9810E	Nil
Nil	Nil	Nil	Terrain 540FT	120606.0050N 1243059.9830E	Nil

RPVC AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
17	166° GEO 167° MAG	1525M X 30M	PCN 19.7 R/B/W/T CONC	Nil	3.30M AMSL
35	346° GEO 347° MAG	1525M X 30M	PCN 19.7 R/B/W/T CONC	Nil	3.30M AMSL
Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
Nil	80M X 30M	80M	Nil	Nil	Nil
Nil	Nil	Nil	Nil	Nil	Nil

RPVC AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
17	1525	1605	1605	1525	Nil
35	1525	1525	1525	1525	Nil

RPVC AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD.
5	Remarks	Nil.

RPVC AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	CALBAYOG AERODROME ADVISORY ZONE (AAZ): A circle radius 5 NM centered on 120437N 1243252E (ARP).
2	Vertical limits	AAZ: SFC up to but excluding 2000 FT.
3	Airspace classification	G.
4	ATS unit call sign Language(s)	Calbayog Radio. English.
5	Transition altitude	Nil.
6	Hours of applicability	Nil.
7	Remarks	Nil.

RPVC AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
FSS	Calbayog Radio	122.1 MHZ 5205 KHZ / 3872.5 KHZ	2100 - 0500*	A/G PRI FREQ. G/G FREQ. (Main: Mactan Network). *FSS OPS LTD to the provision of WX and FLT INFO SER BTN 2100 - SR.

RPVC AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

- 1.1 Number of aircraft in the traffic pattern limited to two (2) at any given time.

RPVC AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	Page
Traffic Circuit Chart (RWY 17)	RPVC AD CHART 2 - 1
Traffic Circuit Chart (RWY 35)	RPVC AD CHART 2 - 2

INTENTIONALLY
LEFT
BLANK

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
11 FT

FSS - 122.1

CALBAYOG/Calbayog (RPVC)

RWY 17

CHANGES: ACFT CAT, Units of Measurement and VAR Deleted. Data Resolution. OBST HGT, TFC Pattern Speed. Chart Page Format.

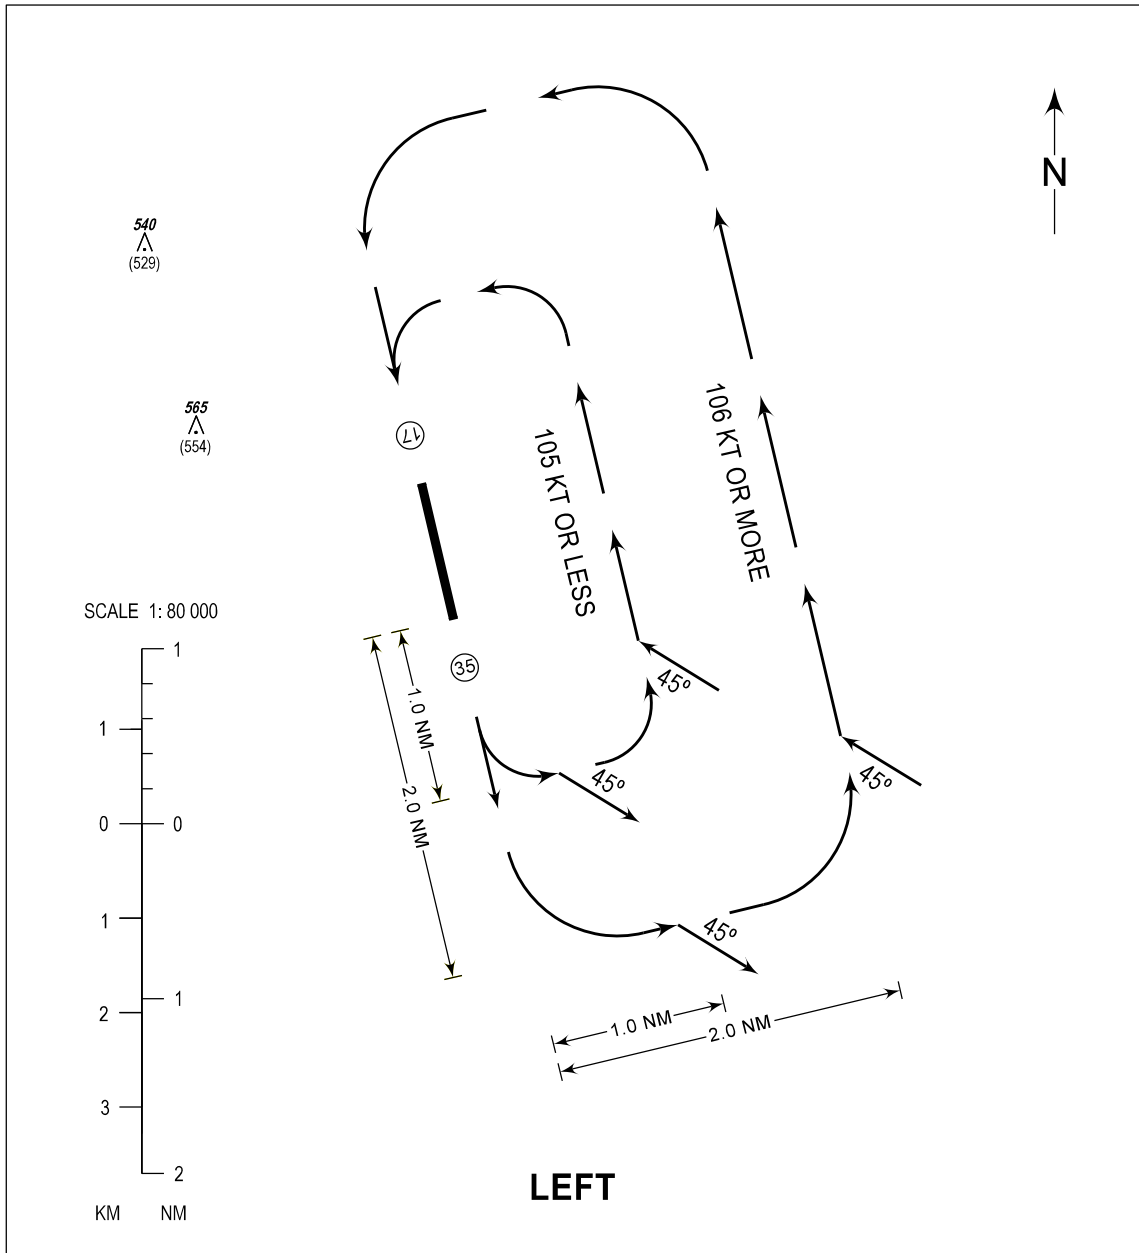

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
11 FT

FSS - 122.1

CALBAYOG/Calbayog (RPVC)

RWY 35

CHANGES: ACFT CAT, Units of Measurement and VAR Deleted, Data Resolution, OBST HGT, TFC Pattern Speed, Chart Page Format.

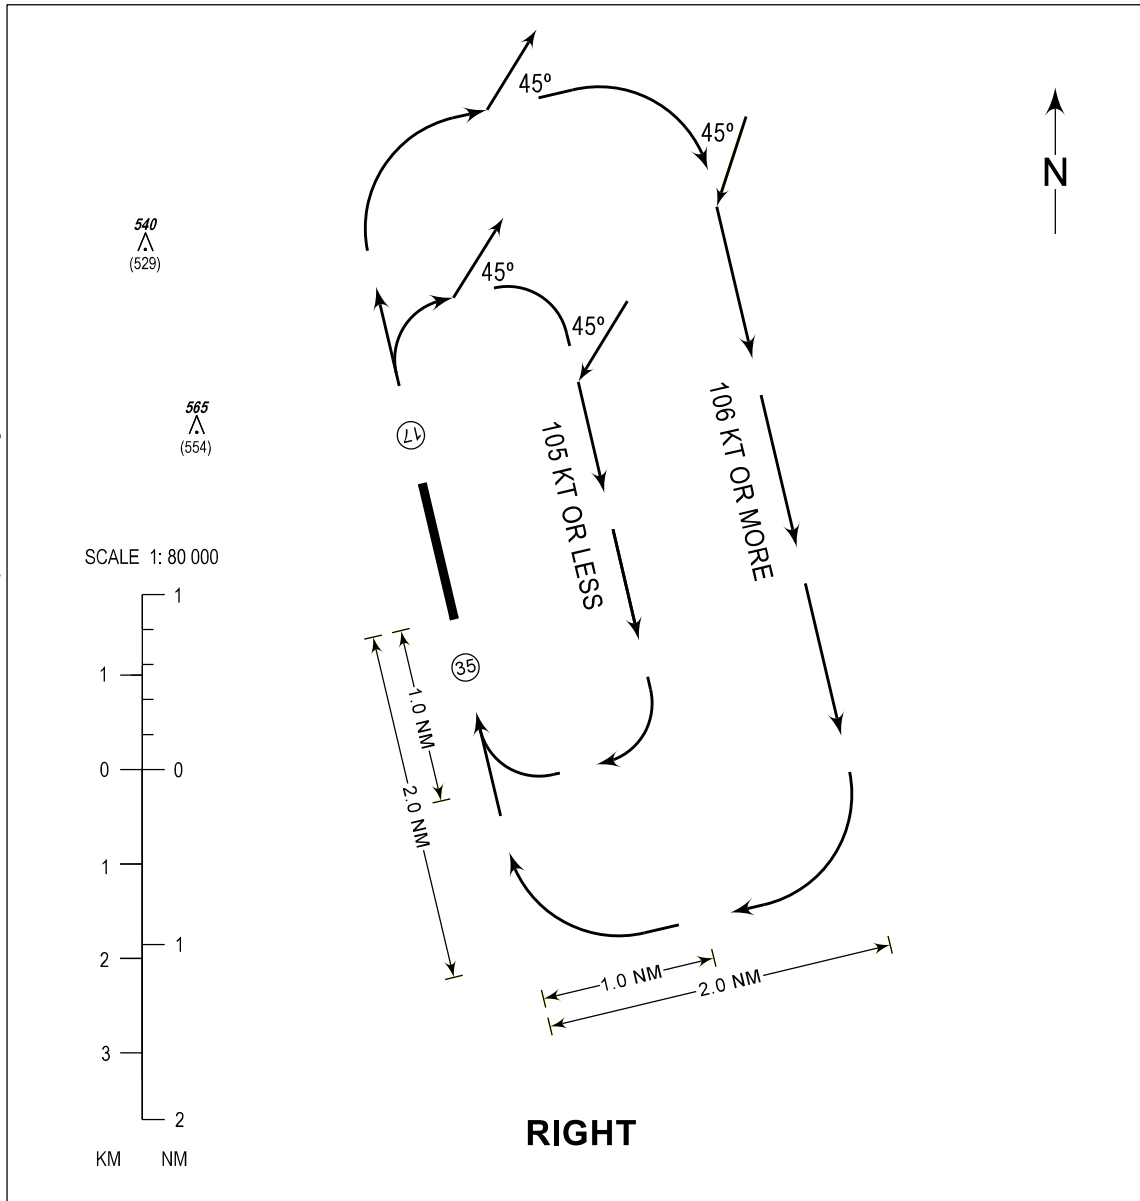

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.