

DS-2CE12DFT-F 2 MP Full Time Color Bullet Camera













Key Features

- 2 MP high performance CMOS
- 1920 × 1080 resolution
- Full time color
- 3.6 mm, 6 mm fixed lens
- Up to 40 m white light distance
- OSD menu, 3D DNR, true WDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (HIKVISION-C)





Spcifications


Camera	
Image Sensor	2 MP CMOS image sensor
Resolution	1920 (H) × 1080 (V)
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Min. illumination	Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Slow Shutter	Max. 16x
Lens	3.6 mm, 6 mm fixed lens
Horizontal Field of View	83.6° (3.6 mm), 52.8° (6 mm)
Lens Mount	M16
Day & Night	Color
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to180°; Rotate: 0° to 360°
Synchronization	Internal synchronization
WDR (Wide Dynamic Range)	120 dB
Menu	
AGC	Yes
White Balance	Auto/Manual
BLC (Backlight Compensation)	Yes
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable areas
WDR	Yes
Functions	Brightness, Sharpness, 3D DNR, Mirror, Smart light
Interface	
Video Output	1 HD analog output
Switch Button	TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ±25%
Power Consumption	Max. 4.2 W
Protection Level	IP67
Material	Front Cover: Metal Main Body: Plastic Bracket: Metal
White Light	Up to 40 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	223.1 mm × 77.1 mm × 82.6 mm (8.78" × 3.04" × 3.25")
Weight	Approx. 436 g (0.96 lb.)




Order Model

DS-2CE12DFT-F


Dimension

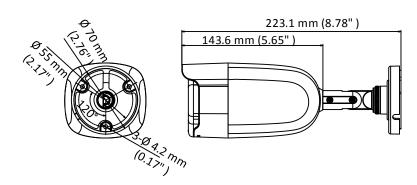



Accessory





DS-1280ZJ-XS Junction Box

Distributed by

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com Hikvision Europe T +31-23-5542770 saleseuro@hikvision.com

Hikvision France T +33[0]1-85-330-444 info.fr@hikvision.com

Hikvision Oceania T +61-2-8599-4233 salesau@hikvision.com Hikvision Middle East T+971-4-8816086 salesme@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Hong Kong T +852-2151-1761 Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Poland T +48-22-460-01-50 poland@hikvision.com

Hikvision Canada T+1-909-895-0400 sales.usa@hikvision.com Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision UK T +44-1628-9021-4 support.uk@hikvision.com