

# DS-2CE16D0T-I2FB 2 MP Balun Camera







### **Key Feature**

- 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- Smart IR, up to 20 m IR distance
- Twisted-pair cable transmission, BNC transmission
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP66





## Specification


Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	2.8 mm, 3.6 mm, 6 mm fixed lens
Horizontal Field of View	106.4° (2.8 mm), 79.6° (3.6 mm), 51.9° (6 mm)
Lens Mount	M12
Day & Night	ICR
WDR	Digital WDR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360°
Menu	
Image Mode	STD/HIGH-SAT
AGC	Yes
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto/Manual
AE (Auto Exposure) Mode	DWDR/BLC/HLC/Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, Sharpness, Mirror, Smart IR
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%
Power Consumption	Max. 2.5 W
Ingress Protection	IP66
Material	Metal
IR Range	Up to 20 m
Communication	HIKVISION-C
Dimensions	Φ 70 mm × 153.6 mm × 60.4 mm (Φ 2.76" × 6.05" × 2.38")
Weight	Approx. 310 g (0.68 lb.)




#### **Order Model**

DS-2CE16D0T-I2FB

#### **Dimension**



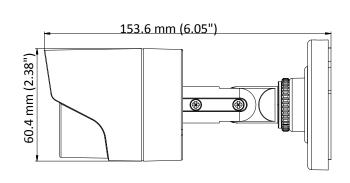

#### **Accessory**





Junction Box

## **HIKVISION**°

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA

T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T+39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 [216]521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T+01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 [10] 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T+7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T+971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com