REVISION BLOCK				APPROVED	
ECO NO.	REV	DESCRIPTION	DATE	HW ENG	NPIE
EA597534	A0	PRODUCTION RELEASE	05/26/22	MP	PA

NOTES: UNLESS OTHERWISE SPECIFIED

1. ASSEMBLY WORKMANSHIP TO MEET OR EXCEED LATEST REVISION OF IPC-A-610 CLASS 2.
2. AREA ARRAY PACKAGE SOLDER JOINT VOIDS TO MEET OR EXCEED LATEST REVISION OF IPC-7095, CLASS 2.
3. THIS ASSEMBLY DRAWING SHOWS ALL COMPONENT LOCATIONS FOR ALL BOARD STUFF OPTIONS. REFER TO SPECIFIC BILL OF MATERIALS FOR COMPONENTS USED AND SCHEMATIC.
4. REFER TO MANUFACTURING ASSEMBLY PROCEDURES (MAPs) LISTED ON THE BILL OF MATERIALS.
5. SQUARE PADS INDICATE PIN NUMBER 1 THRU HOLE COMPONENTS. POSITIVE TERMINALS OF POLORIZED CAPACITORS, CATHODES OF DIODES AND EMITTERS OF TRANSISTORS.
6. TRIM ALL THRU HOLE COMPONENT LEADS TO .085" MAXIMUM LENGTH FROM THE LEAD PROTRUSION SIDE OF THE PCB.
7. AFFIX COMBINATION SERIAL NUMBER LABEL AND MARK BILL OF MATERIALS ASSEMBLY NUMBER AND REVISION IN AREA SHOWN. REFER TO CISCO SPECIFICATION 701806-0000. DO NOT USE THE PART NUMBER AND REVISION FROM THIS DRAWING.
8. AFFIX CISCO AUTHENTICATION LABEL
9. DESIGNATED AREA FOR INSPECTION AND TEST STAMPS.
10. ALL SCREWS SHALL BE TIGHTENED PER SPECIFICATION: TORQUE STANDARD FOR MECHANICAL ASSEMBLY INCH AND METRIC SCREW THREAD FASTENERS 95-5874-01.

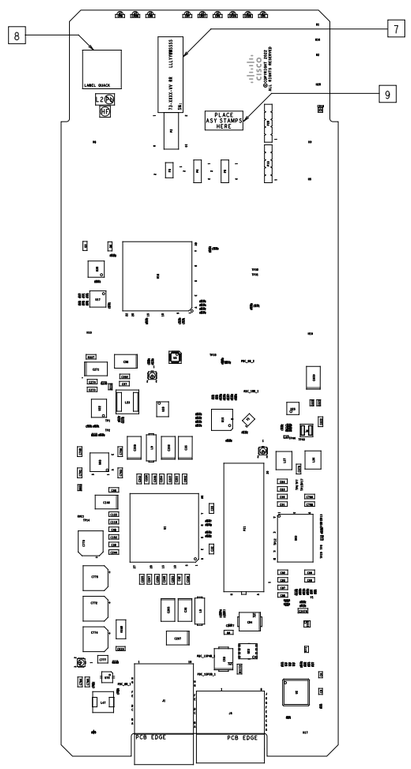

PRIMARY SIDE

© 2022 Cisco Systems, Inc.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

TOLERANCES:
.XX +/- 0.01
.XXX +/- 0.005
ANGLES: +/- 5°

MATERIAL: N/A

FINISH: N/A

THIRD ANGLE PROJECTION

THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF CISCO SYSTEMS. THIS DRAWING IS CONFIDENTIAL AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CISCO SYSTEMS.

APPROVALS	DATE
ECAD: PCERBONE	05/26/22
EENG: MDRG	05/26/22
NPIE: PANSHU	05/26/22

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134
U.S.A.

TITLE
PCADWG
TEMPLE MB

SIZE D | DWG NO. 60-104369-04 | REV A0

SCALE : NONE | SHEET 1 OF 2

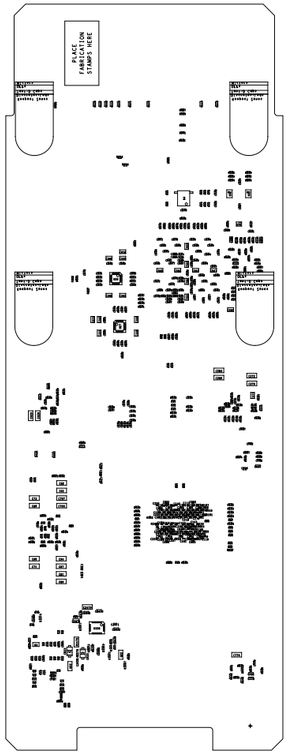

SECONDARY SIDE

SIZE	DWG NO.	REV
D	60-104369-04	A0
SCALE : NONE		SHEET 2 OF 2