

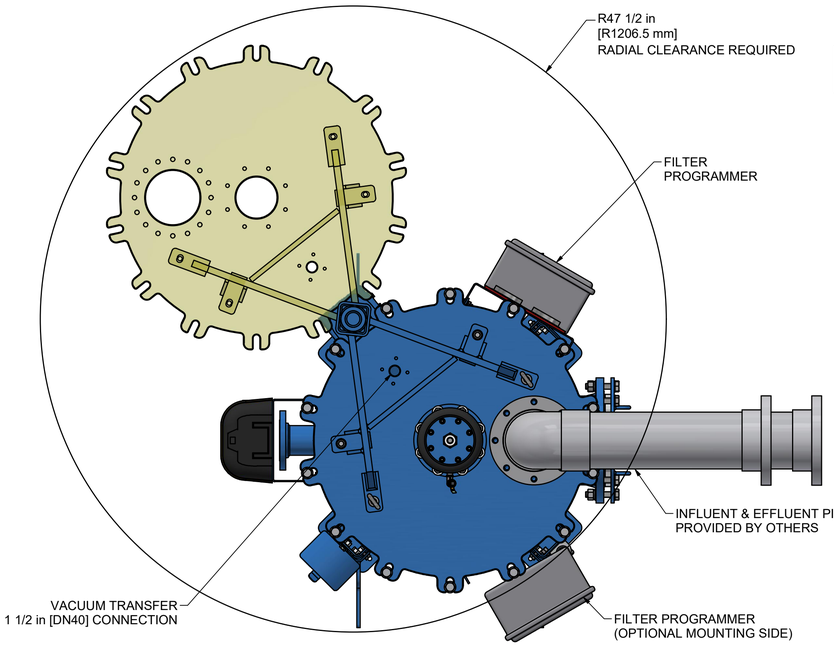


NOTE: DIMENSIONS FOR REFERENCE ONLY, NOT FOR CONSTRUCTION UNLESS CERTIFIED BY XYLEM NEPTUNE BENSON.

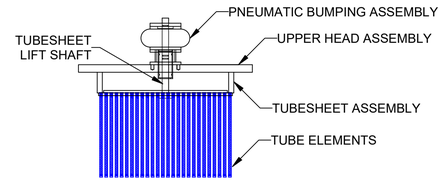

UPPER HEAD AND ELEMENT DETAIL

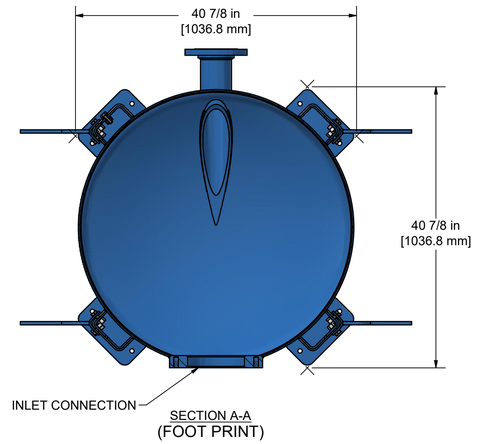



SECTION A-A
(FOOT PRINT)


MARK	QTY.	DESCRIPTION	PART #	REMARKS
1	1	DEFENDER FILTER SP-39-36-948	SP-39-36-948	
2	1	AUTOMATIC FILTER PROGRAMMER MODEL : RMF 12	MICRORMF	SHIP LOOSE
3	1	VACUUM TRANSFER UNIT	VACUUM	SHIP LOOSE
4	1	FILTER /REGULATOR 1/2" NPT CONNECTION	1000-5527	SHIP LOOSE
5	1	GAUGE PANEL KIT	1000-8245	SHIP LOOSE
6	1	VACUUM TRANSFER PLUMBING KIT	1000-5821	NOT SHOWN SHIP LOOSE
7	1	DEFENDER DRAIN VALVE 4" LEVER	1000-7321	SHIP LOOSE

NOTES:

1. FILTER TANK IS TO BE CONSTRUCTED OF HIGH QUALITY A36 CARBON STEEL, UPPER HEAD THICKNESS = 1 1/2" (38.1mm), LOWER HEAD THICKNESS = 13/32" (10.31mm) & SHELL THICKNESS = 1/4" (6.35mm).
2. INTERIOR OF TANK IS LINED WITH FLEXSOL 3000. EXTERIOR IS COATED WITH 5-8 MILS OF HIGH SOLIDS ENAMEL. NO WELDING OR EXTREME HEAT IS TO BE APPLIED TO TANK AFTER LINING OR COATING PROCESS IS DONE.
3. ELECTRICAL REQUIREMENTS: 120VAC-10-60Hz, 15 AMP CIRCUIT PROTECTION.
4. LOCATE ALL ELECTRICAL ITEMS IN A NON-HAZARDOUS LOCATION.
5. ELECTRICAL CONNECTIONS ARE THE RESPONSIBILITY OF THE CUSTOMER.
6. MEDIA QUANTITIES ARE INDICATED FOR INFORMATIONAL PURPOSES ONLY.
7. ALL PNEUMATIC TUBING SUPPLIED BY POOL CONTRACTOR.
8. DRAIN VALVE MUST BE A BUTTERFLY VALVE AND INSTALLED ON THE DRAIN FLANGE.
9. DESIGN PRESSURE IS 50 PSI (344.73 kpa). HYDROSTATICALLY TESTED TO 75 PSI (517.11 kpa).

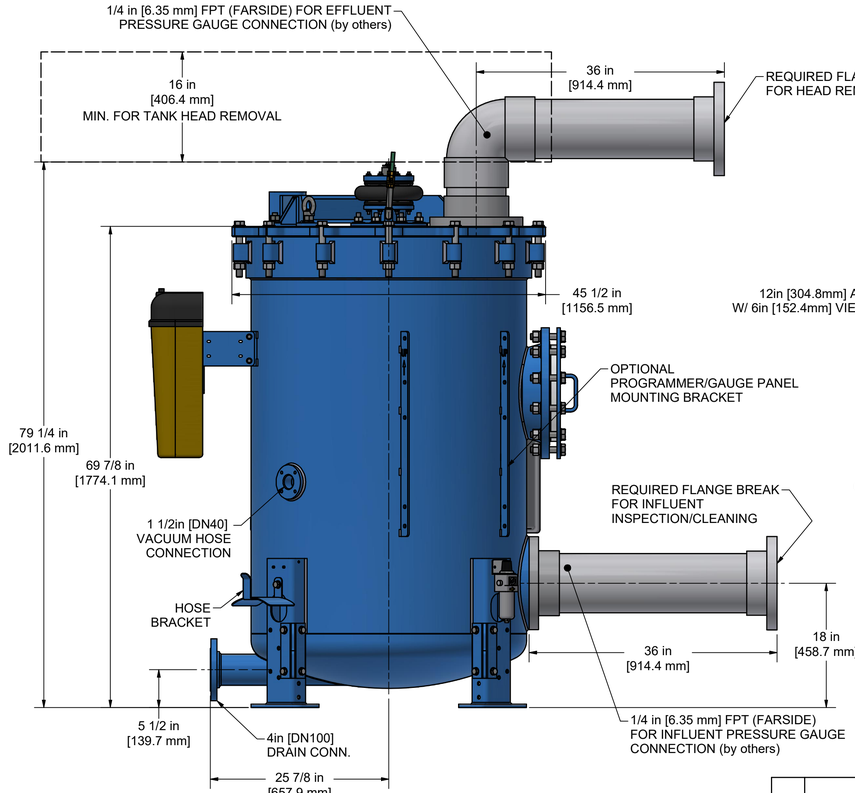

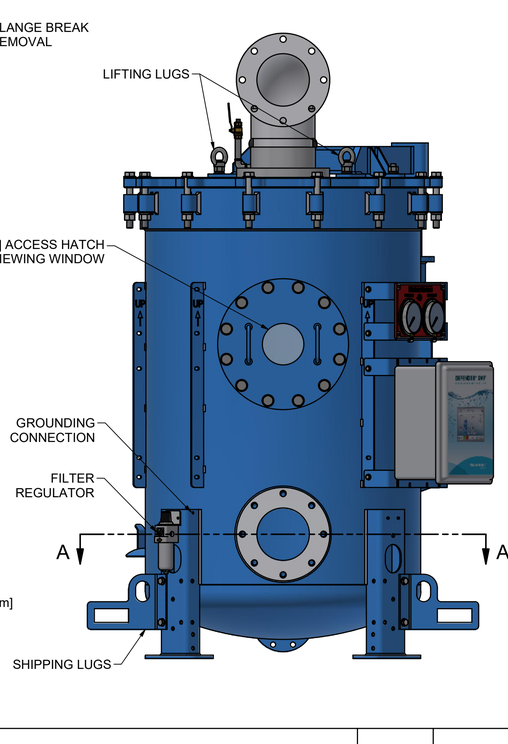

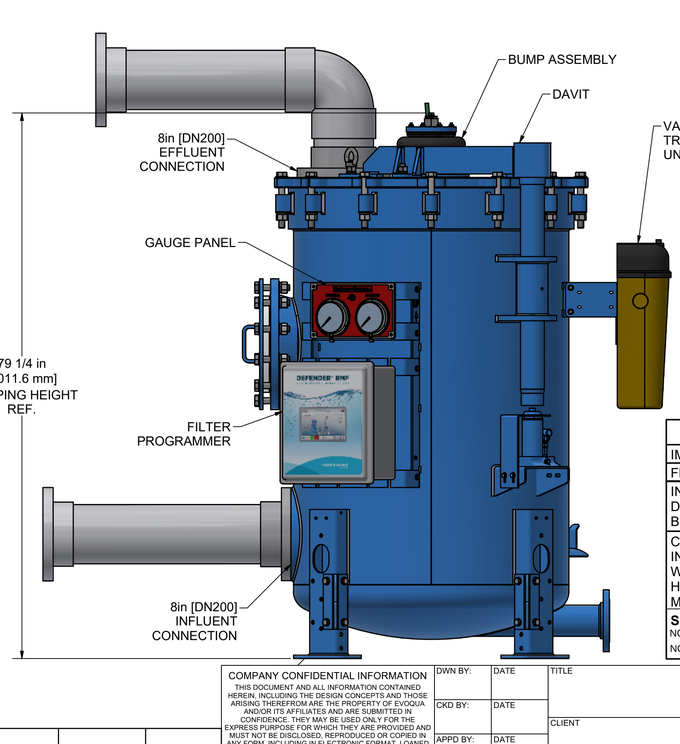

FILTER DATA

SYSTEM FLOW RATE = 279-782 GPM
FILTER AREA = 372 SQ.FT
FILTRATION RATE = .75-2.1 GPM/SQ.FT
NUMBER OF TUBES = 948

UNIT WEIGHT - DRY : 2,545 LBS
UNIT CAPACITY : 337 GALS
OPERATING WEIGHT : 5,402 LBS
4 LEGS PER TANK
CONCRETE BEARING PRESSURE = 27 PSI

MEDIA REQUIREMENTS

PERLITE : 44 LBS (4.9 CU.FT.)

NOTES

IMPERIAL CONNECTIONS

FLANGES CONFORM TO ANSI B16.5, CLASS 150

INFLUENT & EFFLUENT CONNECTIONS ARE DRILLED FOR METRIC AND IMPERIAL FLANGE BOLT PATTERNS

CUSTOMER IS TO CONFIRM THERE ARE NO INTERFERENCES IN THE FILTER ROOM THAT WOULD INHIBIT THE ROTATIONAL SWING OF THE HEAD REQUIRED FOR GENERAL FILTER MAINTENANCE

SPECIAL NOTES:
NONE
NONE

REV	DESCRIPTION	DATE	DWN	CKD	APPD	ECN

COMPANY CONFIDENTIAL INFORMATION
THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN, INCLUDING THE DESIGN CONCEPTS AND THOSE ARISING THEREFROM ARE THE PROPERTY OF EVOQUA AND/OR ITS AFFILIATES AND ARE SUBMITTED IN CONFIDENCE. THEY MAY BE USED ONLY FOR THE EXPRESS PURPOSE FOR WHICH THEY ARE PROVIDED AND MUST NOT BE DISCLOSED, REPRODUCED OR COPIED IN ANY FORM, INCLUDING IN ELECTRONIC FORMAT, LOANED OR USED IN ANY OTHER MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF EVOQUA. ALL PATENT RIGHTS ARE RESERVED. THIS DOCUMENT AND DERIVATIVE WORKS THEREOF ARE PROTECTED UNDER APPLICABLE COPYRIGHT LAWS. UPON DEMAND OF EVOQUA, THIS DOCUMENT, ALONG WITH ALL COPIES AND EXTRACTS, AND ALL RELATED NOTES AND ANALYSES MUST BE RETURNED TO EVOQUA OR DESTROYED, AS INSTRUCTED BY EVOQUA. ACCEPTANCE OF THE DELIVERY OF THIS DOCUMENT CONSTITUTES AGREEMENT TO THESE TERMS.

DWN BY:	DATE	
CKD BY:	DATE	
APPD BY:	DATE	
MGD BY:	SCALE	NTS

TITLE
PROJECT NAME
POOL NAME

CLIENT
CLIENT NAME

EVOQUA WATER TECHNOLOGIES
WARWICK RI USA
+1(0)1-800-832-8002

PART NUMBER	PROJ/PROD NUMBER	CODE	FILE/DRAWING NUMBER	SHEET	REV
SP-39-36-948	#####	Z-GA01	V113922362	OF	

BAR = 1" AT PLOT SCALE
STD 22x34_D v4.4